

AXIOM® Light Covers – Indirect

Trim



SUSTAIN™
High Performance
Sustainable
Ceiling Systems



Axiom® – Indirect Light Covers

This extruded aluminum perimeter trim is a solution for use as exposed custom decorative trim with suspended panels or drywall.

KEY SELECTION ATTRIBUTES

- Axiom® Indirect Field Light Covers for Specialty Ceilings offer predictable lighting performance and perfect integration with selected Armstrong® Specialty Ceilings
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Axiom Indirect Light Covers are part of the Sustain® portfolio and meet the most stringent sustainability compliance standards today
- With our lighting partners, this pre-engineered solution offers a variety of options with both Ceiling-to-Wall and Ceiling-to-Ceiling light covers and sizes
- Featuring a new Knife Edge® profile that brings acoustical panels out to the edge of the cove
- 10-Year Limited Warranty, 30-Year System Warranty

TYPICAL APPLICATIONS

- Offices
- Corridors
- Restrooms
- Healthcare
- Lobbies
- Boardrooms
- Retail

LIGHTING FIXTURES

Compatible with:
Axis Lighting and Vode® Lighting



VISUAL SELECTION

Specify Indirect Light Cove Item Number

Example: AXIDLCC4812S – Axiom Indirect Light Cove, Ceiling-to-Ceiling, 12" Classic Light Cove with Plenum Air Slots


	Item No. ♦	Mounting	Edge Detail	Size	Options
Straight	AXIDL	--	--	--	--
		CC – Ceiling-to-Ceiling	4 – 4" Classic KE – Knife Edge ACT KD – Knife Edge Drywall	812 – 12" Height 1014 – 14" Height 1216 – 16" Height 1418 – 18" Height 1620 – 20" Height	Blank S – Plenum Air Slots
	AXIDL	--	--	--	--
		CW – Ceiling-to-Wall	4 – 4" Classic KE – Knife Edge ACT KD – Knife Edge Drywall	48 – 8" Height 610 – 10" Height	Blank S – Plenum Air Slots

NOTE: Light Covers are 10' in length. Ceiling-to-Wall Light Covers Knife Edge Slotted include 1 AXIDLCWC, 5 AXCLT45, 2 AX4SPLICE. Ceiling-to-Wall Light Covers 4" Slotted include 1 AXIDLCWC, 5 AXTCB, 2 AX4SPLICE.


APPLICATION CONSIDERATIONS

Axiom Indirect Light Covers cannot be curved. Axiom Indirect Light Covers cannot be field cut. Standard and/or custom factory-assembled corner units available.

Ceiling-to-Wall Classic (Item AXIDLCW448)

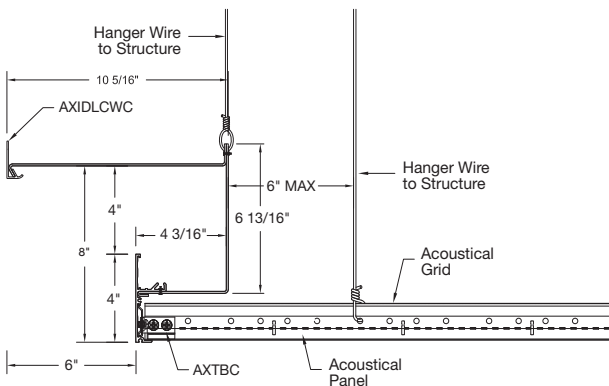

Ceiling-to-Ceiling Knife Edge (Item AXIDLCCKD1014S)

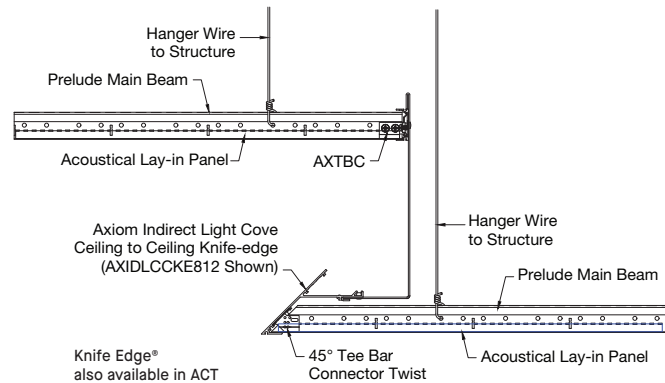

AXIOM® Light Covers – Indirect Trim



LEED WELL LBC

50% RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility
ALUMI-NUM
EPD
recyclable/ biobased materials
producer resp.
recycled content
sourcing of low materials
material ingredient reporting
low emitting/ materials
lighting quality
acoustics

Calculate sustainability with Green Genie armstrongceilings.com/greengenie

Well Building Standard™ (WELL) Living Building Challenge® (LBC)

LOCATION DEPENDENT

VISUAL SELECTION


Specify Indirect Light Cove Item Number

Example: AXIDLCW4481C – Axiom Indirect Light Cove, Ceiling-to-Ceiling, 8" Classic Light Cove Inside Corner


Corners	Item No. ♦	Mounting	Edge Detail	Size	Options
Corners	AXIDL	-- CC – Ceiling-to-Ceiling	-- 4 – 4" Classic KE – Knife Edge ACT KD – Knife Edge Drywall	-- 812 – 12" Height 1014 – 14" Height 1216 – 16" Height 1418 – 18" Height 1620 – 20" Height	-- IC – Inside Corner OC – Outside Corner
	AXIDL	-- CW – Ceiling-to-Wall	-- 4 – 4" Classic KE – Knife Edge ACT KD – Knife Edge Drywall	-- 48 – 8" Height 610 – 10" Height	-- IC – Inside Corner OC – Outside Corner

NOTE: Light Cove Corners are 12" in length and 12" in width. Elevations and shop drawings are required for the manufacturing of this product. Contact Armstrong Customer Service at 1 877 276 7876, select options 1-1-2 for quotation.


CORNERS FOR KNIFE EDGE® PROFILES




Knife Edge
Ceiling-to-Ceiling
Inside Corner



Knife Edge
Ceiling-to-Wall
Inside Corner

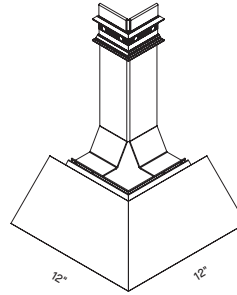


Knife Edge
Ceiling-to-Ceiling
Outside Corner




Knife Edge
Ceiling-to-Wall
Outside Corner


CORNERS FOR CLASSIC PROFILES




Classic
Ceiling-to-Ceiling
Inside Corner



Classic
Ceiling-to-Wall
Inside Corner



Classic
Ceiling-to-Ceiling
Outside Corner



Classic
Ceiling-to-Wall
Outside Corner



AXIOM® Light Covers – Indirect Trim



LEED WELL | LBC






50% RECYCLED CONTENT

energy management construction waste mgmt regional materials design for flexibility EPD recyclable/extended producer resp. bio-based materials recycled content sourcing of raw materials material ingredient reporting low emitting materials lighting quality acoustics

Calculate sustainability with Green Genie® armstrongceilings.com/greengenie

Well Building Standard™ (WELL) Living Building Challenge® (LBC)

ACCESSORIES

Item No.	Description	
AXCCLT45	45 Degree T-Bar Connector Twist For use with Knife Edge Coves	
AXIDLCWC	Indirect Light Cove Wall Clip For use with Ceiling-to-Wall Light Coves	
AXBTSTR	Axiom Bottom Drywall Trim For use with 4" Classic Edge Coves only	
AXTBC	T-Bar Connector Clip For use with 4" Classic Edge Coves only	
AX4SPICE	Axiom Splice Plate	



TRIM & TRANSITIONS – Standard

AXIOM® Light Covers – Indirect Trim



LEED® WELL™ LBC

50% RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/producer resp.
biobased materials
recycled content
sourcing of low materials
material ingredient reporting
low emitting materials
lighting quality
acoustics


Calculate sustainability with Green Genie
armstrongceilings.com/greengenie

Well Building Standard™ (WELL) Living Building Challenge® (LBC)


LOCATION DEPENDENT

LIGHTING PARTNERS

Lighting and diffuser solutions are available through partner companies

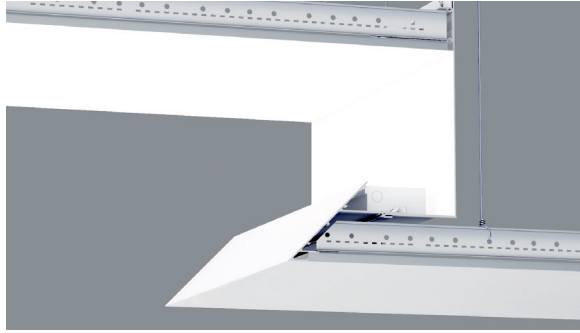

- Outstanding Aesthetics**
- No shadows. No bright spots. No color shifting.
- Easy Specification**
- Aim-free luminaire. No need for complex details. Less trade coordination.
- Unparalleled Performance**
- Twice the efficiency of other LED cove products.
 - Wide distribution using SurroundLite™ technology
- Worry-free Installation & Maintenance**
- Foolproof keyed mounting. Up to 90% less labor.

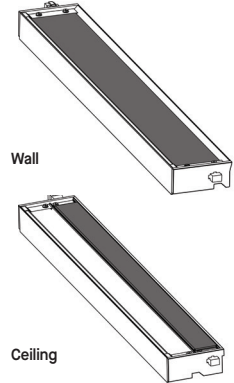

For compatible lighting details, visit axislighting.com


vode ZipWave™ LED 707

Exceptional Performance

- Low, standard and high outputs available
- High output over 1200 lm/ft.
- Customizable output and wattage options

Foolproof Installation

- Drop-in, tool-free installation with plug and play connections
- Runs 100' or more from one 120v power feed
- Section lengths in exact 1' (305mm) increments

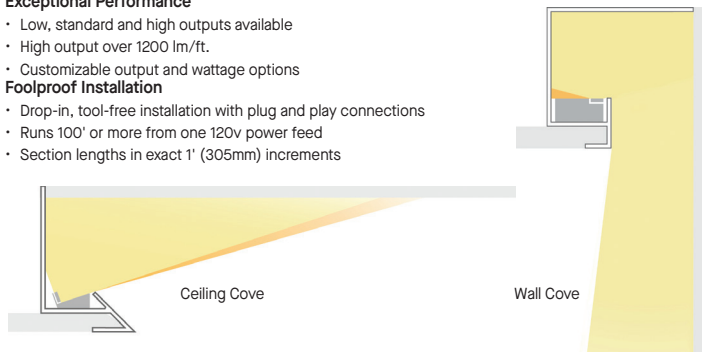

For compatible lighting details, visit vode.com/zipwave-led-707

PHYSICAL DATA

Material
Commercial quality 3003 aluminum alloy

Surface Finish
Factory-applied baked polyester paint finish

Warranty
10-Year Limited Warranty; 30-Year System Warranty

Profile
Various options with both Ceiling-to-Wall and Ceiling-to-Ceiling Light Covers in a wide range of sizes with 3/4" horizontal flange.

Cross Tee/Main Beam Interface
Flush fit

End Detail
Splice with screws

Cleaning & Disinfecting
Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning

ICC Reports
For areas under ICC jurisdiction, see evaluation report numbers ESR-1289 and ESR-1308 for allowable values and/or conditions of use concerning the suspension system components listed on this page. The reports are subject to reexamination, revisions, and possible cancellation.

TechLine / 1 877 276-7876
armstrongceilings.com/lightcovers
BPCS-5065-124

CovePerfekt™ is a trademark of Axis Lighting; Vode® And ZipWave™ are trademarks of Vode Lighting LLC; LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute; WELL™ and Well Building Standard are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2024 AWI Licensing LLC

Armstrong®
World Industries



TRIM & TRANSITIONS – Standard