

CIRRUS® High NRC CIRRUS® High CAC & CIRRUS®

Tegular
medium texture



**TOTAL
ACOUSTICS®**
Sound Absorption (NRC)
+ Sound Blocking (CAC)



SUSTAIN®
High Performance
Sustainable
Ceiling Systems



Cirrus® Beveled Tegular panels with Suprafine® XL® 9/16" suspension system

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



DESIGNFlex®
A New World of Choice
for Ceiling Systems



See more photos at:
armstrongceilings.com/photogallery

Medium-texture panels offer both Sustain® and Total Acoustics® panel performance; Good noise reduction and sound blocking in one panel.


KEY SELECTION ATTRIBUTES

- DesignFlex® options include made-to-order sizes available to ship in 3 weeks
- Get total noise control and floor plan versatility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics performance
- Cirrus® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- New colors to complement interiors
- Excellent combination of acoustical performance: NRC up to 0.75 and CAC 35
- High NRC items feature Articulation Class 170 helpful to control sound over wall partitions
- Ceiling-2-Ceiling™ post-consumer recycled content options. Items 589HRC, 539HRC, 584HRC, 535HRC. 71% pre-consumer; 15% post-consumer
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Product – 91%
- 10-Year replacement panel available for items 584, 589



COLORS


Due to printing limitations, shade may vary from actual product.

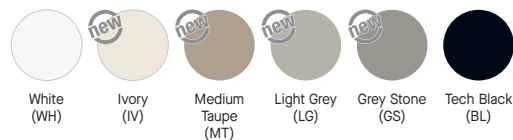

Items 535, 539, 584 and 589 are available in colors. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

DETAILS

(Other Suspension Systems compatible. Refer to listing on next page.)

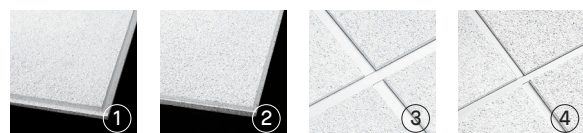

1. Cirrus® Angled Tegular
2. Cirrus® Beveled Tegular
3. Cirrus® Angled Tegular with Prelude® XL® 15/16" suspension system
4. Cirrus® Beveled Tegular with Suprafine® XL® 9/16" suspension system

CIRRUS® High NRC

Tegular
medium texture

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 91%

SUSTAIN*
High Performance
Sustainable Ceiling Systems

Declare.

GREENGUARD
Gold Certified
(details below)

LEED® WELL | LBC

UP TO **73% RECYCLED CONTENT**

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/repurposed producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
CIRRUS® High NRC 15/16" Angled Tegular	13	556	24 × 24 × 7/8" □
		551	24 × 48 × 7/8" □
9/16" Beveled Tegular	29, 44, 48, 52, 56	558	24 × 24 × 7/8" □
		568	24 × 48 × 7/8" □

PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	Durability	Recycle Program	30-Yr Warranty
0.75 •	35 •	BETTER ()))	170 •	Class A	0.84 •	•	•	•	Std	•	•
0.75 •	35 •	BETTER ()))	170 •	Class A	0.84 •	•	Std	•	Std	•	10-Yr
0.75 •	35 •	BETTER ()))	170 •	Class A	0.84 •	•	•	•	Std	•	•
0.75 •	35 •	BETTER ()))	170 •	Class A	0.84 •	•	Std	•	Std	•	10-Yr

7/8" Thick – 15/16" Angled Tegular & 9/16" Beveled Tegular


Made-to-Order Sizes	Width	Length	N/A	N/A	N/A	N/A	Class A	0.84	•	Std	•	•	Std	•	10-Yr
Made-to-Order panel options have a minimum order quantity of 500 SF	12" - 24"	24" - 48"													

3-4 WEEKS
order to ship

MORE ITEMS ▶

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
Type III, Form 1, Pattern E I
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Acoustic Performance
CAC testing conducted using Silhouette® suspension system.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG UL 2818



Insulation Value
R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
551 – 1.21 lbs/SF; 48 SF/ctn
556, 558 – 1.40 lbs/SF; 40 SF/ctn
568 – 1.25 lbs/SF; 48 SF/ctn

Metric Items Available
551M, 558M, 568M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



MINERAL FIBER – Standard

CIRRUS®
Tegular
medium texture



USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 91%

Declare.

SUSTAIN®
High Performance
Sustainable Ceiling Systems

GREENGUARD
Gold Certified
(details below)

LEED® WELL | LBC

UP TO 77% RECYCLED CONTENT

energy management, construction waste mgmt, regional materials, design for flexibility, EPD, recyclable/extended producer resp., bio-based materials, recycled content, sourcing of raw materials, material ingredient reporting, low emitting materials, lighting quality, acoustics

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE SELECTION Dots represent high level of performance.

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	Fog	Durability	Recycle Program	30-yr Warranty
CIRRUS® 9/16" Beveled Tegular	29, 44, 48, 52, 56	589_ _ 589HRC	24 × 24 × 3/4"	0.70	35	BETTER	N/A	Class A	0.85*	*	*	*	*	Std	*	*
		538	24 × 24 × 7/8"	0.70	38	BETTER	N/A	Class A	0.85	*	*	*	*	Std	*	*
		577	24 × 24 × 3/4"	0.35	35	N/A	N/A	Fire Guard™	0.85	*	*	*	*	Std	*	*
15/16" Angled Tegular	13	539_ _ 539HRC	24 × 48 × 3/4"	0.70	35	BETTER	N/A	Class A	0.85*	*	Std	*	*	Std	*	*
		578	24 × 24 × 3/4"	0.35	35	N/A	N/A	Fire Guard	0.85	*	*	*	*	Std	*	*
		534	24 × 24 × 7/8"	0.70	38	BETTER	N/A	Class A	0.85	*	*	*	*	Std	*	*
15/16" Angled Tegular	13	535_ _ 535HRC	24 × 48 × 3/4"	0.70	35	BETTER	N/A	Class A	0.85*	*	Std	*	*	Std	*	*
		535HRC	24 × 48 × 3/4"	0.70	35	BETTER	N/A	Class A	0.85*	*	Std	*	*	Std	*	*

Red Numbers are Fire Guard items.

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)

* White only

♦ Add 2-letter color suffix to item number when specifying or ordering (e.g., 839 L G).

PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies (Class A)

ASTM E1264 Classification
Type III, Form 1, Pattern E I; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Design Considerations
Color ceilings are dye-lotted and should be segregated by dye lot. Do not mix. Coordinating suspension system colors are available.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Acoustic Performance
CAC testing conducted using Silhouette® suspension system.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. HRC items contain 15% or greater post-consumer recycled ceilings.

PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS
UL.COM/GG
UL 2818



Insulation Value
R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
534, 538 – 1.38 lbs/SF; 40 SF/ctn
535, 535HRC, 539, 539HRC – 1.21 lbs/SF; 48 SF/ctn
577, 578 – 1.25 lbs/SF; 48 SF/ctn
584, 584HRC, 589, 589HRC – 1.06 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
584M, 578M, 534M, 572M, 581M, 535M, 589M, 538M, 577M, 583M, 539M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



MINERAL FIBER – Standard

CIRRUS® High CAC

Tegular
medium texture

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 91%

SUSTAIN*
High Performance
Sustainable Ceiling Systems

Declare.

GREENGUARD
Gold Certified
(details below)

LEED® WELL | LBC

UP TO **73% RECYCLED CONTENT**

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/ biobased producer resp.
- biobased materials
- recycled content
- sourcing of low materials
- material ingredient reporting
- low emitting/ materials
- lighting quality
- acoustics

Calculate sustainability with Green Genie®
armstrongceilings.com/greengenie

LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE SELECTION

Dots represent high level of performance.


\$\$\$

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Anti-Mold/ Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	Fog	Durability	Recycle Program	30-Yr Warranty
CIRRUS® High CAC 15/16" Angled Tegular	13	572	24 × 24 × 7/8"	0.70	40	BETTER	N/A	Class A	0.85	*	*	*	*	Std	*	*
		581	24 × 48 × 7/8"	0.70	40	BETTER	N/A	Class A	0.85	*	Std	*	*	Std	*	10-Yr
9/16" Beveled Tegular	29, 44, 48, 52, 56	576	24 × 24 × 7/8"	0.70	40	BETTER	N/A	Class A	0.85	*	*	*	*	Std	*	*
		583	24 × 48 × 7/8"	0.70	40	BETTER	N/A	Class A	0.85	*	Std	*	*	Std	*	10-Yr
Made-to-Order Sizes			3/4" Thick – 15/16" Angled Tegular & 9/16" Beveled Tegular													
			Width	Length	N/A	N/A	N/A	N/A	Class A	0.85	*	Std	*	*	Std	10-Yr
			12" - 24"	24" - 48"												

3-4 WEEKS
order to ship

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies (Class A)

ASTM E1264 Classification
Type III, Form 1, Pattern E I; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Design Considerations
Color ceilings are dye-lotted and should be segregated by dye lot. Do not mix. Coordinating suspension system colors are available.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Acoustic Performance
CAC testing conducted using Silhouette® suspension system.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. HRC items contain 15% or greater post-consumer recycled ceilings.

Insulation Value
R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
572, 576 – 1.38 lbs/SF; 40 SF/ctn
581, 583 – 1.21 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
572M, 581M, 583M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

