

# METALWORKS™ for DESIGNFLEX®

Tegular – Squares & Rectangles  
smooth texture



## DESIGNFLEX® CEILING SYSTEMS

### PERSONALIZE YOUR DESIGN!

Mix and match different sizes, shapes, colors, and materials to reinvent your ceiling. More at: [armstrongceilings.com/designflex](http://armstrongceilings.com/designflex)

CAD/Revit® drawings at: [armstrongceilings.com/cadrevit](http://armstrongceilings.com/cadrevit)

### plus capabilities to do more



[armstrongceilings.com/capabilities](http://armstrongceilings.com/capabilities)  
See more photos at: [armstrongceilings.com/photogallery](http://armstrongceilings.com/photogallery)




MetalWorks Tegular for DesignFlex

Personalize your design and get acoustical performance with MetalWorks™ for DesignFlex® perforated panels.


### KEY SELECTION ATTRIBUTES

- DesignFlex® options for sizes and colors
- Mix and match – Shapes for DesignFlex® also available with Calla®, Lyra®, Ultima®, Optima®, and MetalWorks™ panels
- MetalWorks™ for DesignFlex® panels can be combined with other DesignFlex® product families
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Lighting and MEP integration with TechZone®, or with standard modular and pendant lights
- Perforations available to enhance acoustical performance and design aesthetics
- Outstanding NRC with acoustical fleece or infill panel (0.65 – 0.90)
- Easy-to-cut BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits
- Aluminum panels with exceptional durability – Washable, Scrubbable, Soil-resistant
- Part of the Sustain™ portfolio, and meets the most stringent industry sustainability compliance standards today


**COLORS** Due to printing limitations, shade may vary from actual product.

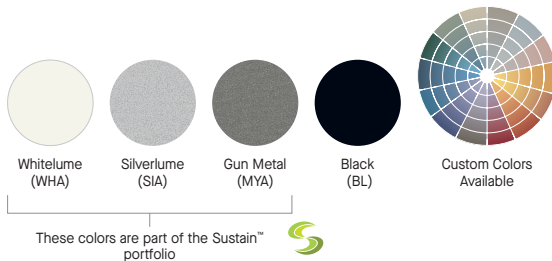

**PERFORATION OPTIONS** (1:2 scale shown)



### DETAILS



1. MetalWorks Tegular unperforated

# METALWORKS™ for DESIGNFLEX®

Tegular – Squares & Rectangles  
smooth texture



LEED® WELL | LBC  
UP TO 25% RECYCLED CONTENT

energy management  
construction waste mgmt  
regional materials  
design for flexibility  
EPD  
recyclable/producer resp.  
biobased materials  
recycled content  
sourcing of raw materials  
material ingredient reporting  
low emitting materials  
lighting quality  
acoustics

For LEED contribution contact TechLine

LOCATION DEPENDENT

WITH INFILL PANEL

## VISUAL SELECTION

Item No. ♦	Dimensions Nominal W x L (Inches)	Custom Sizes Available	Perforations
METALWORKS™ (with acoustical fleece)			
9/16" Square Tegular			
6647_	6" x 6"	□	M1, M15, M19
6648_	6" x 12"	□	M1, M15, M19
6649_	6" x 48"	▬	M1, M15, M19
6650_	6" x 60"	▬	M1, M15, M19
6643_	12" x 48"	▬	M1, M15, M19
8225_	12" x 60"	▬	M1, M15, M19
6641_	24" x 24"	□	M1, M15, M19
6644_	24" x 42"	□	M1, M15, M19
6642_	24" x 48"	□	M1, M15, M19
8226_	24" x 60"	▬	M1, M15, M19
8227_	24" x 72"	▬	M1, M15, M19
6645_	27" x 30"	□	M1, M15, M19
8228_	28" x 30"	□	M1, M15, M19
8229_	28" x 60"	▬	M1, M15, M19
6646_	30" x 30"	□	M1, M15, M19

♦ When specifying or ordering, include the appropriate perforation, letter color, and, if needed, coating suffix with the item number (e.g., 6099 M 1 W H A).  
NOTE: Order any dimension at [asquote@armstrongceilings.com](mailto:asquote@armstrongceilings.com)

## PERFORMANCE

Dots represent high level of performance.


Light Reflect (White only)	CleanAssure™ Disinfectable Panels						DURABILITY
	Fog	Spray	Wipe	Wash	Scrub	Soil	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	
0.75 (M1)	.	.	.	.	.	.	

## ACOUSTICAL INFORMATION

Perforation	NRC with acoustical fleece	NRC with 1" fiberglass infill *
M1	N/A	N/A
M15	0.80	0.90
M19	0.75	0.90

\* Maximum NRC achieved with acoustical infill (item 8200T10).

EXAMPLE:




## ACCESSORIES

Item No. ♦♦	Description	Colors	Dimensions (Inches)	Pieces/Carton
6099_	Edge Cap for Cut Tegular Panels for 9/16" suspension systems**	MY, SG, WH, BL	Nominal 24" length	50
5823	BioAcoustic™ Infill Panel (Black – Matte)	N/A	24 x 24 x 5/8"	12
8200T10	1" Fiberglass Infill Bag (Black – Gloss)	N/A	24" x 24"	12

♦♦ When specifying or ordering, include the appropriate 2-letter color suffix with the item number (e.g., 6099 B L).  
\*\* 24" Edge Caps needed for product longer than 24"

## SUSPENSION SYSTEMS



## PARTNER COMPANIES

For more information on our partner companies, please visit [armstrongceilings.com/partners](http://armstrongceilings.com/partners)

Compatible with:  
Axis Geometrix™ Lighting,  
JLC-Tech T-BAR FLEX® LED®  
Lights and Price diffusers.



Shaped infill panels are available through [asquote@armstrongceilings.com](mailto:asquote@armstrongceilings.com) for specific partner lighting fixtures.

## PHYSICAL DATA

**Material**  
Aluminum – 0.040" thickness

**Surface Finish**  
Factory-applied polyester paint finish

Custom colors also available. Contact TechLine for custom color matching requests at 1 877 276-7876.

**Fire Performance**  
Class A: Painted aluminum tested per ASTM E84 and CAN/ULC S102. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. Laminate finishes tested per ASTM E84. Flame Spread Index 75 or less. Smoke Developed Index 450 or less.

**Acoustical Performance**  
CAC testing conducted using Silhouette® for 9/16" edge detail.

**ASTM E1264 Classification**  
Fire Class – Class A  
Unperforated – Type XX, Pattern G  
Perforated – Type XX, Pattern C

**Design Considerations**  
Silverlume (SIA) and Gun Metal (MYA) finishes are directional, marked with arrows from the factory. Visit [armstrongceilings.com/patterngallery](http://armstrongceilings.com/patterngallery) to see pre-designed patterns and colors.

**Seismic Restraint**  
MetalWorks™ Tegular panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

**Cleaning and Disinfecting**  
Cleaning and CDC-approved disinfecting options available on [armstrongceilings.com/cleaning](http://armstrongceilings.com/cleaning)

**Warranty**  
Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)

**Weight; Pounds/PC (Bulk Packed)**

6647 – 0.138 LBS/PC	6642 – 4.400 LBS/PC
6648 – 0.275 LBS/PC	8226 – 5.500 LBS/PC
6649 – 1.100 LBS/PC	8227 – 6.600 LBS/PC
6650 – 1.375 LBS/PC	6645 – 3.094 LBS/PC
6641, 6643 – 2.200 LBS/PC	8228 – 3.208 LBS/PC
8225 – 2.750 LBS/PC	8229 – 6.417 LBS/PC
6644 – 3.850 LBS/PC	6646 – 3.438 LBS/PC

JLC Tech is a trademark of JLC TECH LLC; Revit® is a registered trademark of Autodesk, Inc; LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge (LBC) are registered trademarks of the International Living Future Institute; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; Price® is a registered trademark of Price Industries Limited; Geometrix™ and Axis are owned by Axis Lighting; UL is a registered trademark of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2024 AWI Licensing LLC Printed in the United States of America

TechLine / 1 877 276-7876  
[armstrongceilings.com/metalworksdesignflex](http://armstrongceilings.com/metalworksdesignflex)  
BPCS-5840-124

**Armstrong®**  
World Industries

DESIGNFLEX® SQUARES & RECTANGLES

