

INFUSIONS® Blades – Concepts


Linear Panels
smooth texture



FAST 134
Select Items Ship Fast
armstrongceilings.com/fast134



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

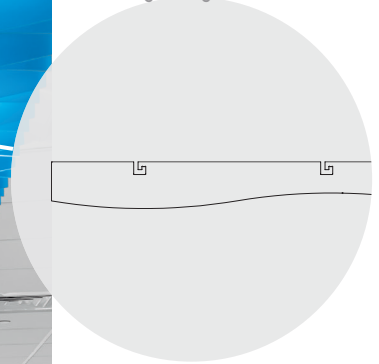

Infusions Blades – Concepts vertical panels in Refined Lagoon

Playful translucent vertical panels, with unique wave designs, interplay with lighting, colors, and textures.

KEY SELECTION ATTRIBUTES


- Create a colorful accent area or add dramatic visual impact with a full-room installation
- Unique wave designs can create a variety of visuals depending on the spacing of the vertical panels and the direction of installation
- Infusions® Blades – Concepts translucent panels coordinate with Armstrong® ceiling products and other interior finishes, including Infusions™ Walls, Partitions, and Canopies




Select products included in the FAST134 program – ready to ship in 4 weeks or less

COLORS Due to printing limitations, shade may vary from actual product.

Solids

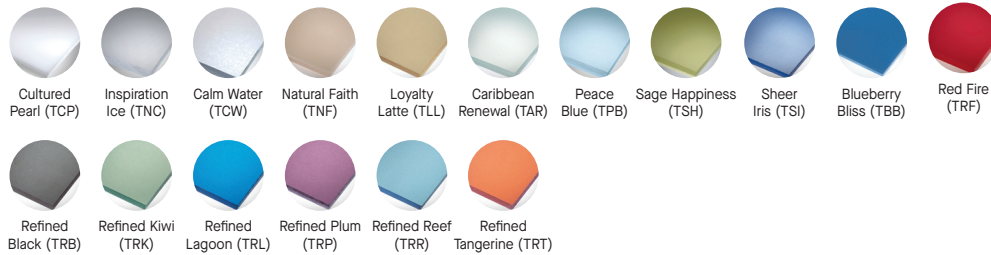

Patterns*

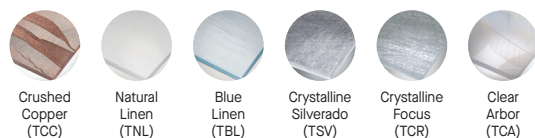

* Due to the unique nature of the woven fabric used in these products, color may vary from panel to panel.

TechLine 877 276-7876
armstrongceilings.com/infusionsblades

Armstrong®
World Industries

INFUSIONS® Blades – Concepts

Linear Panels
smooth texture




LEED® WELL | LBC

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/repurposed producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

PANEL SELECTION

PERFORMANCE SELECTION

Item No. ♦	Dimensions Nominal H x L† (Inches) Custom Sizes Available	Fire Rating	Warranty
7087_ _ _	6 × 48 × 1/4" 	Class A	1-Yr
7086_ _ _	6 × 72 × 1/4" 	Class A	1-Yr
7085_ _ _	6 × 96 × 1/4" 	Class A	1-Yr



FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

♦ When specifying or ordering, include the appropriate 3-letter color suffix. (Example: 7086 I S H)
† Thickness of panels varies by pattern from 0.245" to 0.298".

SUSPENSION COMPONENTS

Item Number	Description	Color	Pieces/Carton
7137AB	96" Suspension Bar for Infusions Blades Concepts with connector holes on both ends (hardware included)	Anodized Black	8 bars/4 connectors/8 screws
6651AB	Suspension Bar End-to-End Connectors and Screws	Anodized Black	4 connectors/8 screws
6655	Blades Hanging Kit*	Metal	1 kit – 4 hanging points

* Each Blades Hanging Kit includes four hanging assemblies. Use one kit for each suspension bar.

PHYSICAL DATA

Material
Polycarbonate

Surface Finish
Smooth

Fire Performance
Infusions Blades – Concepts panels have been tested according to NFPA 286 and are equivalent to Class A Interior Finish as defined by the International Building Code. Designers and installers are advised to consult a fire protection engineer, NFPA 13, and local codes for guidance where automatic fire detection and suppression systems are present. Contact TechLine at 877 276-7876 for specific U.S. and Canadian fire performance data.

Design Considerations
Infusions Blades – Concepts panels are not approved for exterior application.

The wave design on Infusions Blades – Concepts panels is a 4" pattern. Six-foot Blades panels should only be paired with 48" or 96" Blades panels. Six-foot Blades panels should not be placed end-to-end when used with 48" and 96" Blades panels.

Installation Considerations
Do not allow panel edges to get wet or be exposed to moisture. Any fixtures adjacent to Infusions Blades – Concepts panels must be independently supported. There is potential for limited natural deflection of panels. Infusions Blades – Concepts panels can be damaged by exposure to high temperatures. Panel temperature should not be permitted to exceed 100°F. Spacing between two adjacent Blades panel ends must be a minimum of 1/4".

Seismic Restraint
Infusions Blades – Concepts panels have been engineered, tested, and approved for use in all seismic areas. OSHPD/DSA installations may require additional attachment from panel to suspension bar. Consult Armstrong Ceilings to special order panels to accommodate these applications.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times. Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time. Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service. Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty
Details at armstrongceilings.com/warranty

Weight; Pieces/Carton
1.63 lbs/LF
7085, 7086 – 8 pcs/ctn
7087 – 16 pcs/ctn

