

SOUNDSCAPES® Blades

Linear Acoustical Wall Panels
fine texture



FAST 134
Select Items Ship Fast
armstrongceilings.com/fast134

LEED WELL | LBC

43% RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/extended producer resp.
biobased materials
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

For LEED contribution contact TechLine

LOCATION DEPENDENT



SoundScapes® Blades wall panels in Riverstone (DRV), and SoundScapes Blades wave designs in Mist (DMT) and Rainstorm (DRS)

Linear acoustical panels help reduce reverberation time in your space.

KEY SELECTION ATTRIBUTES

- Now available in 15 colors inspired by nature
- Direct attach to wall using Axiom® Wall Molding
- Sound absorption up to 0.80 NRC dependent on blade spacing
- White embedded hanging clips
- Custom panel options available
- Select products included in the FAST134 program – ready to ship in 4 weeks or less. See up-to-date lead times at armstrongceilings.com/fast134

COLORS

Due to printing limitations, shade may vary from actual product.

Painted

White (DWH) Black (DBL) Riverstone (DRV) Stone (DSE) Light Grey (DLG) Oat (DOT) Sandstone (DSS) Custom Colors Available

Boxwood (DBW) Fern (DFN) Ivy (DIV) Ocean (DOC) Twilight (DTT) Rainstorm (DRS) Mist (DMT) Topaz (DTZ)

For premium and custom capabilities, contact ASQuote@armstrongceilings.com

ACOUSTIC INFORMATION

Panel Depth	6" O.C.	12" O.C.	18" O.C.	24" O.C.
5"	0.80	0.50	0.40	0.30

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com

VISUAL SELECTION

Shown in elevation view

Item No. ♦	Description	Dimensions (Inches)
SOUNDSCAPES® 8250F03RH05_ _ _ Blades (formerly item no. 7190)	Rectangular Vertical Panel	5 × 46 × 2" 11" 24" 11" 5" 46"
8250F03RH06_ _ _ (formerly item no. 7191)	Rectangular Vertical Panel	5 × 94 × 2" 11" 24" 24" 24" 11" 5" 94"

NOTE: Scrimmed top edges offered as "Premium."
♦ Add 3-letter color suffix to end of item number (e.g., 8250F03RH05 DWH = White)

PERFORMANCE


Dots represent high level of performance.

Light Reflect	Fire Rating	Anti-Mold/Mildew	Sag Resist	Fog	Spray	Wash	Soil	Impact	DURABILITY	
									White only)	Bio-Block® Humi-Block® CleanAssure™ Disinfectable Panels
0.88 Class A	*	*	*	*	*	*	*	*	*	*
0.88 Class A	*	*	*	*	*	*	*	*	*	*

INSTALLATION OPTIONS

Item No. ♦	Description	PCS/CTN
Direct-Attach with Axiom® Wall Molding	AXM34STR3_ _	10' Straight Wall Molding (360° Paint Recommended; order by the piece)

♦ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 BL)

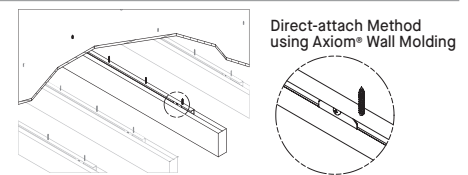

PHYSICAL DATA

Material
2" thick fiberglass with DuraBrite® scrim on face and sides.

Surface Finish
Colors: DuraBrite scrim with factory-applied paint on face and sides. Standard White has energy-saving, high light-reflective finish (LR 0.88). Top of panel is unfinished with white embedded hanging clips.

Fire Performance
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

CAN/ULC S102 surface burning characteristics.
Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart. Deflection up to 1/8" has been documented in some cases.

Special care in installation and handling must be taken with color panels to avoid surface damage to the paint finish. Custom colors are available.

5" SoundScapes Blades are not recommended for use in high-traffic or high-impact areas. For best results, install above 7" from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

Seismic Restraint
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

Recommended Suspension Systems
SoundScapes Blades panels are pre-assembled with metal hanging clips in the top of the panels. See installation instructions BPLA-297844 for installation details.

Warranty
Details at armstrongceilings.com/warranty

Panel Weight
8250F03RH05 – 2.2 LBS per panel
8250F03RH06 – 4.3 LBS per panel

Panels/ Carton
4

Minimum Order Quantity
1 carton

