



**FAST 134**  
 Select Items Ship Fast  
[armstrongceilings.com/fast134](http://armstrongceilings.com/fast134)

# SOUNDSCAPES® Blades

Linear Acoustical Wall Panels – Wood Looks  
 fine texture



SoundScapes Blades wood-look wall panels in Brown Sugar Walnut (WBS)

Linear acoustical wall panels help reduce reverberation time in your space.

## KEY SELECTION ATTRIBUTES

- Now available in 4 Wood Looks
- Direct attach to wall using Axiom® Wall Molding
- Sound absorption up to 0.85 NRC dependent on blade spacing
- Black embedded hanging clips
- Custom panel options available
- Mold- and mildew-resistant surface
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less. See up-to-date lead times at [armstrongceilings.com/fast134](http://armstrongceilings.com/fast134)
- Seismic-tested
- ASTM E84 Class A Fire Performance

## FINISHES

### Standard Wood-look Visuals



Brown Sugar Walnut (WBS)    Toffee Chestnut (WTC)    Vanilla Ash (WVA)    Honey Oak (WHO)

NOTE: Coordinated Prelude® suspension systems available for Wood Looks



*Nature-Inspired Colors Available!*

# SOUNDSCAPES® Blades

Linear Acoustical Wall Panels – Wood Looks  
fine texture

**LEED® WELL | LBC**

**53% RECYCLED CONTENT**

For LEED contribution contact TechLine

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/producer resp.
- biobased materials
- recycled content
- sourcing of materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

**VISUAL SELECTION** Shown in elevation view

Item No. ♦	Description	Dimensions (D x L x Thickness)
SOUNDSCAPES® 8250F04RH05_ _ _	Rectangular Vertical Panel	5 × 46 × 1-3/4"
8250F04RH06_ _ _	Rectangular Vertical Panel	5 × 94 × 1-3/4"

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com  
♦ Add 3-letter finish suffix to end of item number (e.g., 8250F04RH05 W H Q = Honey Oak)


**PERFORMANCE** Dots represent high level of performance.

	Fire Rating	Anti-Mold/Mildew	Sag Resist	Fog	Spray
Class A	•	•	•	•	•
Class A	•	•	•	•	•

## INSTALLATION OPTIONS

Item No. ♦	Description	Pieces/ Carton
Direct-Attach with Axiom® Wall Molding	AXM34STR3_ _	10' Straight Wall Molding (360° Paint Recommended; order by the piece)

♦ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 B L)

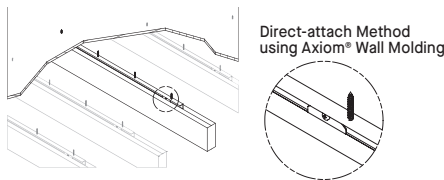

## ACOUSTIC INFORMATION

Panel Depth	6" O.C.	12" O.C.	18" O.C.	24" O.C.
5"	0.85	0.60	0.45	0.35

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com

## PHYSICAL DATA

**Material**  
1-3/4" thick fiberglass with acoustically transparent membrane on face and sides.

**Surface Finish**  
Acoustically transparent membrane. Top of panel is unfinished with black embedded hanging clips.

**Fire Performance**  
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

**Anti-Mold/Mildew**  
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

**Design Considerations**  
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart. Deflection up to 1/8" has been documented in some cases.

Special care in installation and handling must be taken with wood-look panels to avoid surface damage. Be advised thickness on wood-look blades is 1/4" less than painted blades.

5" SoundScapes Blades are not recommended for use in high-traffic or high-impact areas. For best results, install above 7" from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

All wood-look blades are produced with wood grain parallel to the panel length. Wood-look visuals are designed to mimic slight color variations as seen in real wood.

**Seismic Restraint**  
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

**Recommended Suspension Systems**  
SoundScapes Blades panels are pre-assembled with metal hanging clips in the top of the panels. See installation instructions BPLA-297844 for installation details.

**FAST134 Program Considerations**  
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

**Location Matters:** Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

**Distributor Truck Schedule Matters:** We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

**Stock vs Made-to-Order Matters:** FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

**Warranty**  
Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)

**Panel Weight**  
8250F04RH05 – 2.9 LBS per panel  
8250F04RH06 – 5.8 LBS per panel

**Panels/Carton**  
4

**Minimum Order Quantity**  
1 carton

