


# WOODWORKS™ ACGI Baffle System

Tremolo



Tremolo™ (TB1) is a tapered wood baffle that furnishes a stunning and impressive appearance. Each member suspends individually by HD T-Grid. An integral light fixture can be incorporated. Tremolo™ baffles typically have a depth of 81/2", and can be manufactured in a wide variety of veneer.

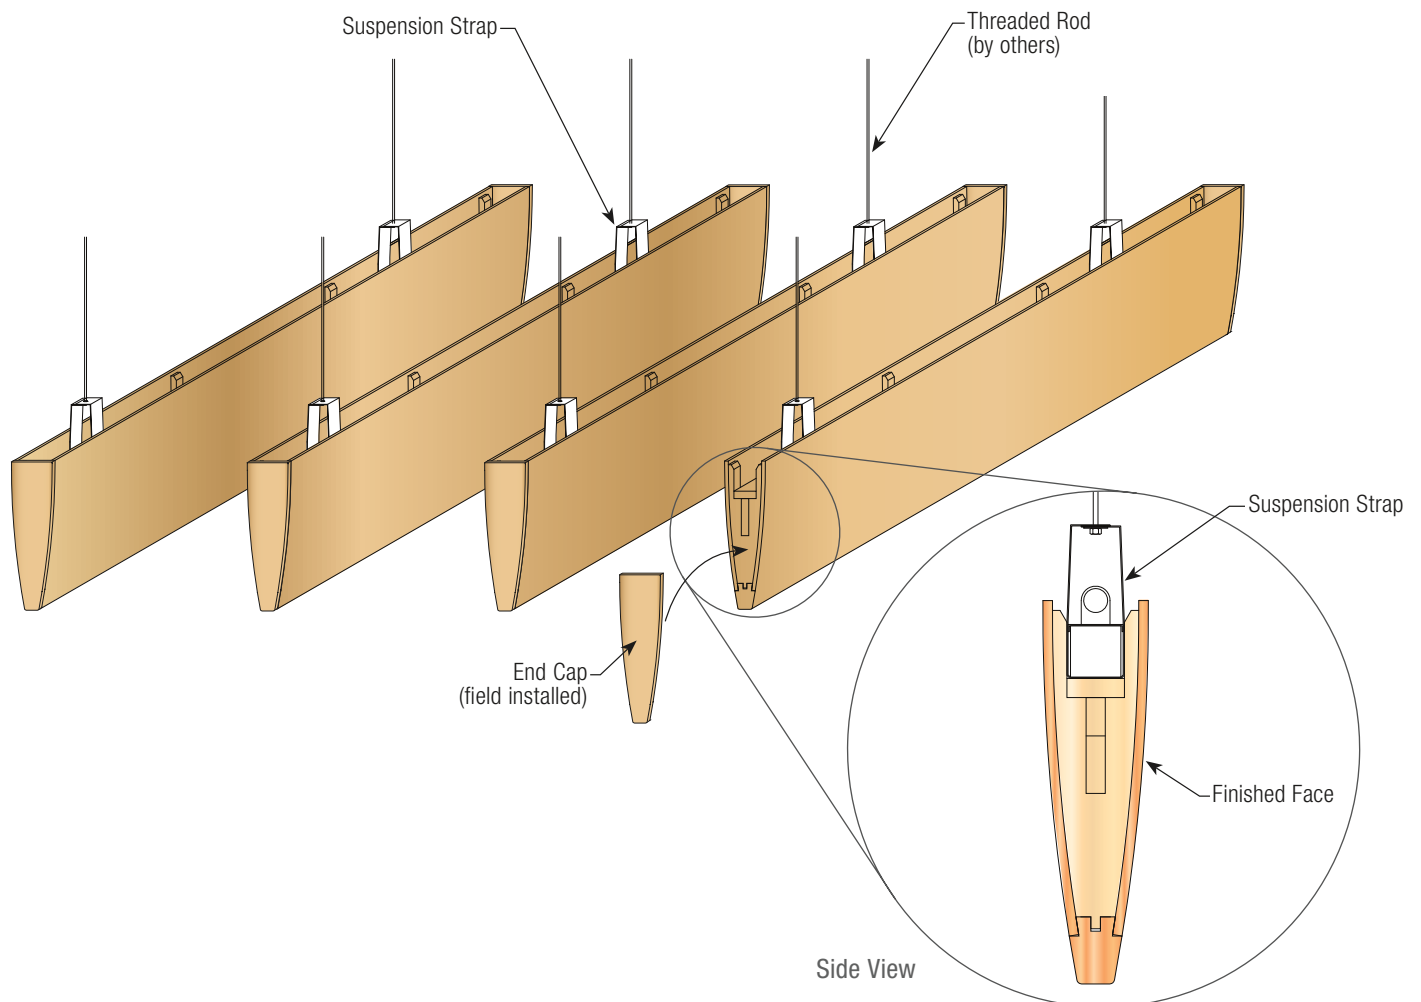

Tremolo Baffle – Specification Information					
Product No.	Profile	Suspension Method	Baffles (per ft.)	Typical Thickness	Typical Panel Weight
TB1-####	Tapered	Independent Suspension	Project Specific	8-1/2"	3"

How To Spec It...	
Series	
<b>TB1-2850</b>	
Baffles per ft.	Depth
<b>What It Means...</b> Tremolo Baffle with 2 baffles/foot and 8-1/2" depth.	



**LEED® CREDIT**

Depending upon product it may contribute to LEED credits. Contact us for more information.

**SPECIES + STAINS**

Tremolo is available in a large variety of wood veneers to meet design requirements. Tremolo can be finished in any of our standard finish options or custom finishes. Please see Wood Species + Stain Catalog. Contact us for more information.

**FIRE RATING**

Veneer Wood (Non-Perforated) – Class A: ASTM E84 surface burning characteristics.

**DELIVERY, STORAGE & HANDLING (FOR INTERIOR APPLICATION ONLY)**

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors, and wet-work must be complete before installation. Handle carefully to avoid damaging.

**WARRANTY**

Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)