

Ceiling Recycling Requirements



The first in the industry
Celebrating 17 years of recycling
Be a part of the solution

What ceiling tiles can be recycled?

ACCEPTABLE FOR RECYCLING:

- All brands of dry, pulpable mineral fiber ceiling panels or tiles. All metal splines must be removed from tiles (12" x 12").

CASE-BY-CASE ACCEPTABLE FOR RECYCLING:

- Glue-up or adhesive ceiling tiles.
- Any vinyl or scrim-faced fiberglass panels.
- Ceiling tiles with dark or metallic paint (applied by manufacturer).
- Ceiling tiles with paint not applied by manufacturer.
- Armstrong WoodWorks™ Ekos® wall panels.
- Armstrong Soundsoak® mineral fiber or fiberglass wall panels.
- Fabric-faced ceiling tiles.
- Cast ceiling panels (without foil).
- Armstrong Sanserra™.
- Armstrong Mylar.
- Fully-packaged ceiling tiles meeting the above criteria.
- All brands of dry fiberglass panels (excludes foil-back panels). Facing must be easily removable.
- Any vinyl or scrim-faced mineral fiber panels.

NOT ACCEPTABLE FOR RECYCLING:

- Asbestos containing ceiling tiles.
- Ceiling tiles installed below friable asbestos or contaminated with any other hazardous material.
- Red- or pink-backed ceiling tiles.
- Wet, moldy or weathered ceiling tiles.
- Ceiling tiles or pallets/boxes which contain visible debris (garbage, construction waste).
- Ceiling tiles not packaged according to Armstrong Specifications.
- Any gypsum ceiling or board.
- Foil-backed ceiling tiles.
- Ceiling tiles with visible wood pulp.
- Armstrong Artran (cardboard-like face).
- Armstrong Ceramaguard®

Check with your local Armstrong representative, call 877-276-7876, select option 1, then 4, or email us at ceiling_recycling@armstrong.com to approve material and for assistance to facilitate recycling. We are continually updating the types of ceiling panels we can recycle and methods we can receive them in.

What amount of material do I need to recycle?

- Full truckload – we'll pick up your old mineral fiber ceilings when and where you tell us – at no charge to you. We will pay freight costs for truckloads over 30,000 sq. ft., anywhere in the continental USA and some places in Canada.
- For less than 30,000 sq. ft., locate a certified recycling contractor or a consolidator close to you with our Local Resource lookup option at armstrong.com/recycling, or call our Recycling Center at 877-276-7876, press 1 (Ceilings), then press 4, or email us at ceiling_recycling@armstrongceilings.com. We have options available to accommodate any size job in most locations.

For more information on the Armstrong Ceiling Recycling Program, visit armstrongceilings.com/recycling


Inspiring Great Spaces®

Armstrong
CEILING SOLUTIONS

How should the used tiles be packaged for shipment to Armstrong?


- Material must be clean, dry and in the acceptable category (see page 1).
- No wood, metal, construction debris or hazardous materials of any kind can be included. If C&D waste is included with ceilings, possible charges can be incurred for disposal.
- Stack used ceiling tiles on pallets:
 - Stack 4' or 6' tall on 4' x 4' sturdy shipping pallets with bottom slats.
 - Secure tiles on pallets with stretch wrap or metal bands.
 - Secure any 2' x 4' pallets (if used) 4' x 4' pallets on loading dock with wrap or bands.
 - When loading, trailer capacity should be maximized.
- A return authorization (RA #) label will be issued by the Armstrong Recycling Center for all approved loads. Securely attach the label to every pallet showing identification of the job approval.
- All tiles should be straight on pallets and secured within the trailer to prevent loads from falling during transit or when pallets are unloaded. Material must be wrapped tightly and packaged so that pallets remain stable. Load locks may be necessary in the trailer.
- If you have special loading or removal circumstances, please contact your Armstrong representative or call 877-276-7876, select option 1, then 4. We will be as flexible as possible to accommodate your project needs.

Stacking Options:

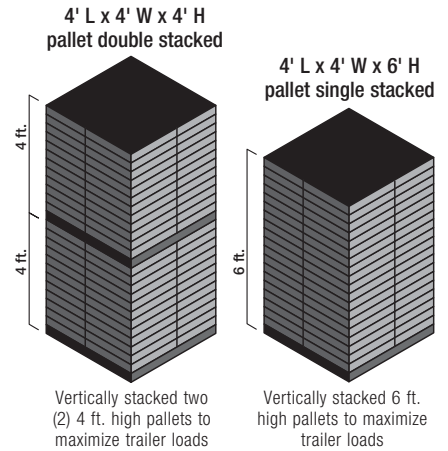

Many crews speed up the stacking by building a simple two-sided, free-standing frame. Note: Frame is not attached to pallet.

How do I load the trailer?

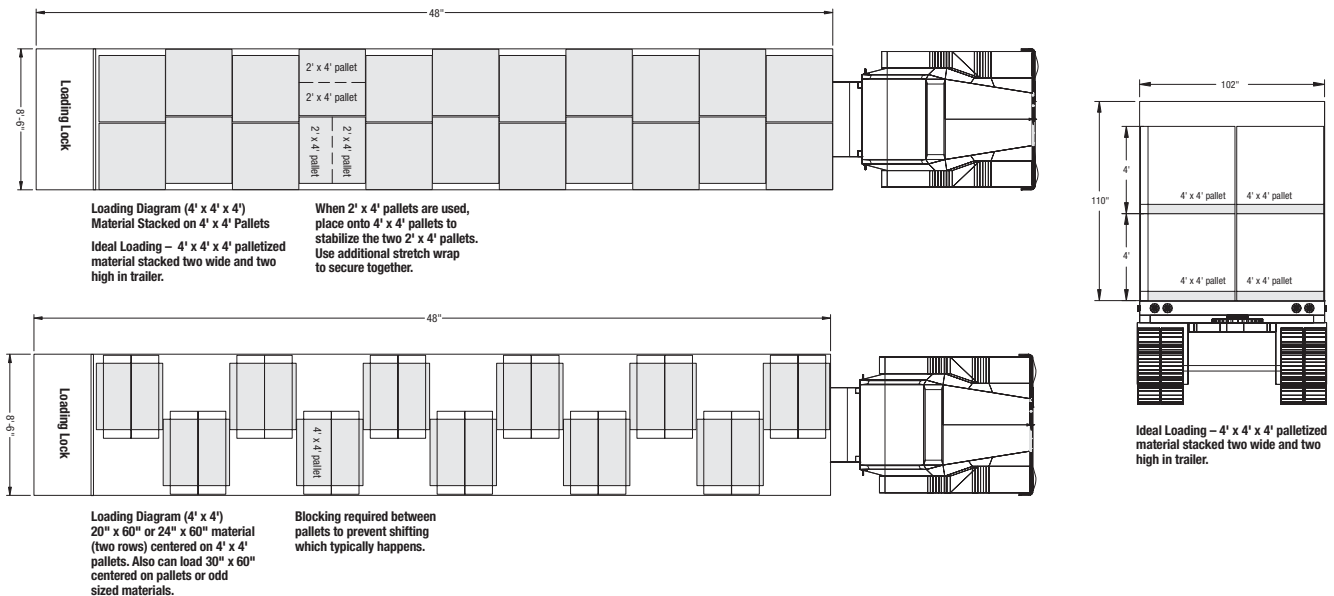

Please recycle ♻️

Inspiring Great Spaces® is a registered trademark of AFI Licensing LLC;
All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2016 AWI Licensing LLC • Printed in the United States of America

TechLine™ / 1 877 ARMSTRONG
1 877 276 7876

BPCS-3273-816

Armstrong®
CEILING SOLUTIONS