

3form Elements – Hush Blocks

Sound Absorbing Shapes



3form Elements – Hush Blocks Impasto pattern in Nickel, Platinum, Steel, and Emerald

Create amazing mosaics using six block shapes made of acoustic Sola Felt™ from 3form.


KEY SELECTION ATTRIBUTES

- Choose from six shapes: 2 squares, 3 rectangles and 1 triangle. Each shape is available in 2", 4", 6", and 8" depths
- Made using our sustainable, high-performance Sola Felt™ with 50% post-consumer recycled PET
- NRC rating of 0.80-1.25 (depending on depth) for excellent sound absorption
- Class A fire rating (US only)
- Easy to specify and install
- Available in 22 standard colors

3form Elements – Hush Blocks

Sound Absorbing Shapes

SOLA FELT™ COLORS Due to dye lot variations, shade may vary from actual product.




Zinc (FZN)



Nickel (FNI)




Platinum (FPL)



Armor (FAR)



Steel (FSL)



Cast (FCA)



Dune (FDN)




Driftwood (FDW)




Silt (FSI)




Mineral (FML)



Ebony (FBN)



Nightfall (FNF)




Admiral (FAD)



Dusk (FDK)




Steelblue (FSB)



Emerald (FEM)



Mustard (FMU)




Citrine (FCR)




Ochre (FOC)



Aries (FAS)



Saffron (FSF)



Jasper (FJP)









PARTITIONS & WALLS

3form Elements – Hush Blocks

Sound Absorbing Shapes

VISUAL SELECTION

	Item No. ◆	Nominal Dimension (W × L × Depth)
HUSH BLOCKS Triangle 24" × 24" 	BPAS1002S01D2_ _ _	24 × 24 × 2"
	BPAS1002S01D4_ _ _	24 × 24 × 4"
	BPAS1002S01D6_ _ _	24 × 24 × 6"
	BPAS1002S01D8_ _ _	24 × 24 × 8"
Square 12" × 12" 	BPAS1002S02D2_ _ _	12 × 12 × 2"
	BPAS1002S02D4_ _ _	12 × 12 × 4"
	BPAS1002S02D6_ _ _	12 × 12 × 6"
	BPAS1002S02D8_ _ _	12 × 12 × 8"
Square 24" × 24" 	BPAS1002S03D2_ _ _	24 × 24 × 2"
	BPAS1002S03D4_ _ _	24 × 24 × 4"
	BPAS1002S03D6_ _ _	24 × 24 × 6"
	BPAS1002S03D8_ _ _	24 × 24 × 8"
Rectangle 12" × 24" 	BPAS1002S04D2_ _ _	12 × 24 × 2"
	BPAS1002S04D4_ _ _	12 × 24 × 4"
	BPAS1002S04D6_ _ _	12 × 24 × 6"
	BPAS1002S04D8_ _ _	12 × 24 × 8"
Rectangle 12" × 36" 	BPAS1002S05D2_ _ _	12 × 36 × 2"
	BPAS1002S05D4_ _ _	12 × 36 × 4"
	BPAS1002S05D6_ _ _	12 × 36 × 6"
	BPAS1002S05D8_ _ _	12 × 36 × 8"
Rectangle 12" × 48" 	BPAS1002S06D2_ _ _	12 × 48 × 2"
	BPAS1002S06D4_ _ _	12 × 48 × 4"
	BPAS1002S06D6_ _ _	12 × 48 × 6"
	BPAS1002S06D8_ _ _	12 × 48 × 8"

PERFORMANCE

Dots represent high level of performance.

Fire Rating	Certified Low VOC Emissions
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*
Class A	*

ACOUSTICAL INFORMATION

Shape Depth	NRC
2"	0.80
4"	1.05
6"	1.20
8"	1.25

◆ When specifying or ordering, include the appropriate 3-digit color suffix (e.g. BPAS1002S01D2 E Z N). For custom sizes, shapes, or colors, contact ASQuote@armstrongceilings.com.

3form Elements – Hush Blocks


Sound Absorbing Shapes

DESIGN OPTIONS



1. Magna pattern in Dusk, Steelblue, Ochre, and Saffron
2. Stencil pattern in Admiral, Armor, and Nickel
3. Stencil pattern in Admiral, Armor, and Dusk
4. Available depths in 2", 4", 6", and 8"

INSTALLATION All hardware included with each panel.

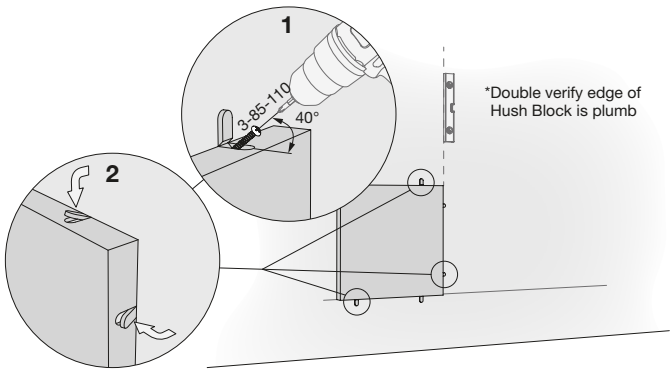

- 1. Easy to Install**
Screw Hush Blocks directly into the wall

- 2. Hidden Hardware**
Felt flaps close flush with the blocks

Shape	Screws/Block (same for all depths)
24" x 24" Triangle	6 screws
12" x 12" Square	8 screws
24" x 24" Square	8 screws
24" x 12" Rectangle	8 screws
36" x 12" Rectangle	10 screws
48" x 12" Rectangle	10 screws

All necessary screws included with each panel.

PHYSICAL DATA

Material
1/4" thick (6mm) non-woven layered and formed polyester felt (PET) fiber panels with color throughout.

Fire Performance
US Only: Flame Spread Index 25 or less. Smoke Developed Index 450 or less. Class A per ASTM E84.

Application Considerations
Panel color and texture may vary from order to order; adequate attic stock should be ordered. Due to the nature of recycled materials, small dark fibers may be visible on light panels.

Hush Blocks panels should not be installed near sources of heat greater than 158° F.

Acoustical Performance
Tested per ASTM C423 and mounted in accordance with ASTM E795. Sound absorption of up to 1.25 NRC. Contact TechLine for details at techline@armstrongceilings.com

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Considerations
Quick and simple installation involves screwing block directly to wall. Felt flaps close flush with the block to hide screws.

Lead Times
4 week lead time (not including transit). All lead times are approximate and dependent upon current supply chains.

Cleaning and Disinfecting
Sola Felt should be cleaned regularly by vacuuming or using a soft brush to prevent dirt buildup and weathering; slight fiber shedding is normal. For liquid stains, promptly blot with a damp cloth or mild detergent, avoiding strong solvents, abrasives, or soaking the material. See installation instructions for complete cleaning guidelines.

Warranty
3form 2-year Limited Warranty

Weight; Pieces/Carton
0.3 lbs/SF
Ordered by the piece (1pc/ctn)