

3form Elements – Zenith

Sound Absorbing Wall Panels




Zenith Wall Panels in Driftwood

Featuring a bold, contemporary design, Zenith wall panels provide unparalleled sound clarity and noise reduction.

KEY SELECTION ATTRIBUTES

- Made using our sustainable, high-performance Sola Felt™ with 50% post-consumer recycled PET
- NRC rating of 0.95 for excellent sound absorption
- Available in 22 Sola Felt™ colors
- Easy-to-install flush mounted for walls
- Kit includes slats and end caps for clean, finished visuals

DETAIL

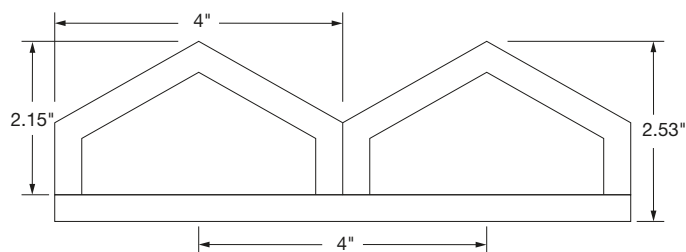


Zenith panel with crowns spaced 4" apart

3form Elements – Zenith

Sound Absorbing Wall Panels

SOLA FELT™ COLORS Due to dye lot variations, shade may vary from actual product.




Zinc (FZN)



Nickel (FNI)



Platinum (FPL)



Armor (FAR)



Steel (FSL)



Cast (FCA)




Dune (FDN)




Driftwood (FDW)




Silt (FSI)




Mineral (FML)




Ebony (FBN)



Nightfall (FNF)




Admiral (FAD)



Dusk (FDK)



Steelblue (FSB)




Emerald (FEM)



Mustard (FMU)



Citrine (FCR)



Ochre (FOC)



Aries (FAS)



Saffron (FSF)



Jasper (FJP)

3form Elements – Zenith

Sound Absorbing Wall Panels

VISUAL SELECTION

	Item No. ◆	Wall Mount	Nominal Dimension (W × L × Depth)
ZENITH Wall Panels	BPAS1005A01_ _ _	Wood or Concrete	44 × 96 × 2.53"
	BPAS1005A02_ _ _	Drywall	44 × 96 × 2.53"
	BPAS1005A03_ _ _	Universal	44 × 96 × 2.53"

◆ When specifying or ordering, include the appropriate 3-letter color suffix (e.g. BPAS1005A01 E Z N)
For custom sizes, shapes, or colors, contact ASQuote@armstrongceilings.com.

PERFORMANCE


Dots represent high level of performance.

Fire Rating	Certified Low VOC Emissions
Class B	*
Class B	*
Class B	*

ACOUSTICAL INFORMATION

NRC
0.95 *
0.95 *
0.95 *

INSTALL WALL CONNECTIONS

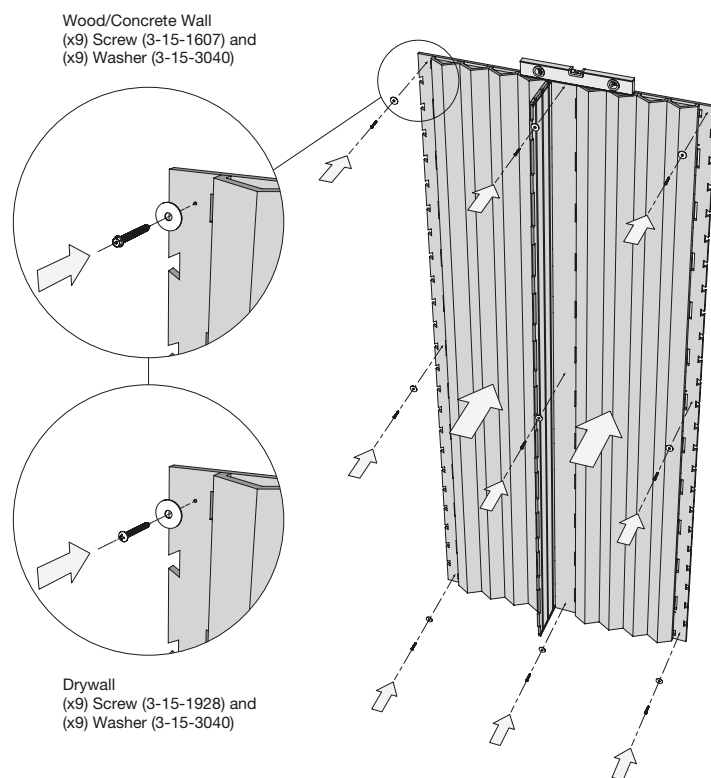

Install from top to bottom. Level as you go.
Install (x9) fasteners through the backer panel into appropriate anchors.

PHYSICAL DATA

Material
3/8" thick (9mm) non-woven layered and formed polyester felt (PET) fiber panels with color throughout.

Fire Performance
US Only: Flame Spread Index 26-75. Smoke Developed Index 450 or less. Class B per ASTM E84.

Application Considerations
Panel color and texture may vary from order to order; adequate attic stock should be ordered. Due to the nature of recycled materials, small dark fibers may be visible on light panels.

Zenith wall panels should not be installed near sources of heat greater than 158° F.

Acoustical Performance
Tested per ASTM C423 and mounted in accordance with ASTM E795. Sound absorption of 0.95 NRC. Contact TechLine for details at techline@armstrongceilings.com

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Considerations
Quick and simple installation involves screwing block directly to wall. Felt flaps close flush with the block to hide screws.

Lead Times
4 week lead time (not including transit). All lead times are approximate and dependent upon current supply chains.

Cleaning and Disinfecting
Sola Felt™ should be cleaned regularly by vacuuming or using a soft brush to prevent dirt buildup and weathering; slight fiber shedding is normal. For liquid stains, promptly blot with a damp cloth or mild detergent, avoiding strong solvents, abrasives, or soaking the material. See installation instructions for complete cleaning guidelines.

Warranty
3form 2-year Limited Warranty

Weight; Pieces/Carton
0.91 LBS/SF
Ordered by the piece (1 piece/carton)