
CALLA® Health Zone™

Square Lay-in & Tegular smooth texture





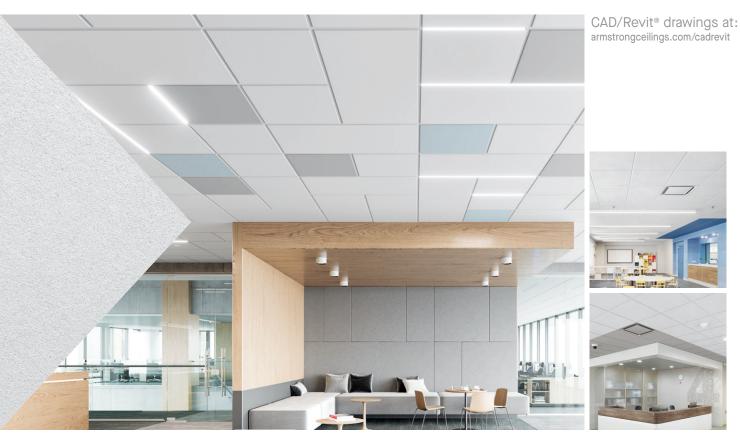

A Calla® Health Zone™ Square Tegular panels with Suprafine® 9/16" suspension system

Perfect for office, education, and healthcare spaces

Smoothest mineral fiber ceiling available; combines exceptional acoustical performance, sustainability, and functionality attributes in one go anywhere ceiling panel that is especially durable and aesthetically pleasing for every healthy space.

KEY SELECTION ATTRIBUTES

- · Get total noise control and floor plan versatility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics Performance
- · Meets or exceeds USDA/FSIS, FGI, HIPAA and ANSI S12.60 guidelines
- · Anti-Bacterial/Mold/Mildew BioBlock® Plus performance resists the growth of odor and stain-producing bacteria as well as mold and mildew on the ceiling tile surface
- · Exceptional durability & cleanability with a smooth, durable finish - impact-, scratch-, and soil-resistant.
- · CleanAssure™ safe for use with disinfectant cleaners
- · Calla® Health Zone™ panels are part of the Sustain® portfolio and meet the most stringent sustainability compliance standards today
- · Clean Room Performance up to ISO Class 5 (Class 100) using gasketed Clean Room™ suspension systems
- · Energy-saving, high light-reflective finish
- · 30-Year Limited System Warranty against visible sag, mold, mildew, and bacterial growth
- · 10-Year replacement panel available for items 2230, 2233, 2231, 2234, 2232, 2235



TYPICAL APPLICATIONS

- Education
- · Office
- · Kitchen / Food prep areas
- · Healthcare
- Patient rooms
- Treatment rooms - Nurses' stations
- Emergency rooms
- Restrooms
- Clean Rooms

COLORS











(SF)



Standard color are pre-qualified to meet Sustain® portfolio requirements. Custom colors may need to be evaluated if sustainability criteria is required.

(WH) **DETAILS**







- 1. Calla® Health Zone™ Square Lay-in
- 2. Calla® Health Zone™ Square Tegular
- 3. Calla Health Zone Square Tegular with Suprafine® 9/16" suspension system



Square Lav-in & Tegular smooth texture

USDA CERTIFIED PRODUCT

SUSTAIN Sustainable Ceiling Systems

PERFORMANCE SELECTION Dots represent high level of performance.

GREENGUARD **Gold Certified** Declare. (details below)

\$\$\$\$

NRC CAC

MINERAL

П

BER – Standarc

LOCATION DEPENDENT

VISUAL SELECTION

DURABILITY CleanAssure™ Disinfectable Panels Program Certified Low VOC Emissions Articulation Class (H) Recycle Wipe UI Classified Soil Acoustics Dimensions (Inches) Item No. 170 Class 0.85 CALLA® 2230 24 × 24 × 1" 0.80 38 Health Zone" ((()) 15/16" 2233 24 × 48 × 1" 0.80 38 BEST 170 Class 0.85 Square Lay-in ((()) 2236 30 × 30 × 1" 170 Class 0.85 0.80 38 **BEST** ((()) 15/16" 24 × 24 × 1" 2231 0.80 38 BEST 170 Class 0.85 Square Tegular Α ((()) 2234 24 × 48 × 1" BEST 0.80 38 170 Class 0.85 ((()) 2237 30 × 30 × 1" 0.80 38 BEST 170 Class 0.85 (0)) Α 9/16 2232 24 × 24 × 1" 0.80 38 BEST 170 Class 0.85 Square Tegular Α ((()) 2232BK 24 × 24 × 1" 0.80 38 BEST 170 Class N/A Α ((()) 2232SE 24 × 24 × 1" 0.80 38 **BEST** 170 Class N/A (1) Α

Made-to-Order

1" Thick - 15/16" Square Lay-in & 15/16" & 9/16" Square Tegular STSIZE

2235

2238

Visit the product page online and see "Configure an Item" to verify canabilities. Questions? email Techline@armstrongceilings.com Length

4" - 1-1/2" 12" - 30" 12" - 72" 4" - 72" 30-1/2" - 48" 4" - 24"

24 × 48 × 1"

30 × 30 × 1"

¹ Total Acoustics* ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
 GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)
 * Advertised values for light reflectance, wash, scrub and scratch resistance are applicable to White panels only

SUSPENSION SYSTEMS * CAC 29 achieved with Clean Room™ suspension system; not UL Classified for acoustics.

15/16 1-1/21 9/16 Prelude Clean Room Clean Room Silhouette Silhouette Interlude® XL® HRC Suprafine (Steel or Aluminum) (Steel or Aluminum) 1/4" Reveal 1/8" Reveal

NOTE: Clean Room Class 5 (Class 100) (item 2231) UL Classified for Acoustics on 15/16" suspension system only.

PHYSICAL DATA

Material Wet-formed mineral fiber with

Sizes

acousticallytransparent membrane

Surface Finish

Acoustically transparent membrane with factory-applied latex paint

Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less Smoke Developed Index of 50 or less (UL® labeled)

ASTM E1264 Classification

Type IV, Form 2, Pattern E; Fire Class A

Humidity/Sag Resistance HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Bacterial/Mold/Mildew

Ceiling tiles with BioBlock® Plus performance resist the growth of odor and stain-producing bacteria as well as mold and mildew on the ceiling tile surface.

VOC Emissions

PRODUCT CERTIFIED FOR LOW CHEMICAL Third-party certified compliant with California Department of Public Health CDPH/EHLB/ Standard Method Version 1.2, 2017.

0.80

0.80

N/A

38

38

BEST

(1)

BEST

((())

170 Class 0.85

Α

170 Class 0.85 Α

N/A N/A Class 0.85

EMISSIONS UL.COM/GG UL 2818

This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (postindustrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 2.9 (BTU units) R Factor – 0.445 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

Only white panels are washable and scrubbable

Design Considerations

Մլ

P

GREENGUARD

Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

30-Year Performance Guarantee & Warranty When installed with Armstrong® Suspension System.
Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton 2230, 2231, 2232, 2232BK, 2232SE - 1.0 lbs/SF; 40 SF/ctn 2233, 2234, 2235 – 1.0 lbs/SF; 48 SF/ctn 2236, 2237, 2238 – 1.0 lbs/SF; 50 SF/ctn

Minimum Order Quantity

