

CALLA® Health Zone™

Square Lay-in & Tegular
smooth texture



**TOTAL
ACOUSTICS®**
Sound Absorption (NRC)
+ Sound Blocking (CAC)




SUSTAIN®
High Performance
Sustainable
Ceiling Systems

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



▲ Calla Health Zone Square Tegular panels with Suprafine® 9/16" suspension system

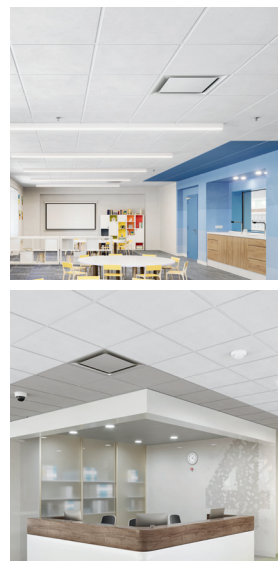

Perfect for office, education, and
healthcare spaces

Smoothest mineral fiber ceiling available; combines exceptional acoustical performance, sustainability, and functionality attributes in one go anywhere ceiling panel that is especially durable and aesthetically pleasing for every healthy space.

KEY SELECTION ATTRIBUTES

- Get total noise control and floor plan versatility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics Performance
- Meets or exceeds USDA/FSIS, FGI, HIPAA and ANSI S12.60 guidelines
- Anti-Bacterial/Mold/Mildew – BioBlock® Plus performance resists the growth of odor and stain-producing bacteria as well as mold and mildew on the ceiling tile surface
- Exceptional durability & cleanability with a smooth, durable finish – impact-, scratch-, and soil-resistant.
- CleanAssure™ – safe for use with disinfectant cleaners
- Calla® Health Zone™ panels are part of the Sustain® portfolio and meet the most stringent sustainability compliance standards today
- Made in the U.S.A. of domestic and global content

- Build America, Buy America (BABA) Act compliant
- Clean Room Performance up to ISO Class 5 (Class 100) using gasketed Clean Room™ suspension systems
- Energy-saving, high light-reflective finish
- 30-Year Limited System Warranty against visible sag, mold, mildew, and bacterial growth
- 10-Year replacement panel available for items 2230, 2233, 2231, 2234, 2232, 2235



* Standard colors are pre-qualified to meet Sustain® portfolio requirements. Custom colors may need to be evaluated if sustainability criteria is required.

COLORS



White
(WH)



Black
(BK)



Stone
(SE)



Custom Colors
Available*

DETAILS



1



2



3

1. Calla® Health Zone™ Square Lay-in
2. Calla® Health Zone™ Square Tegular
3. Calla Health Zone Square Tegular with Suprafine® 9/16" suspension system

CALLA® Health Zone™

Square Lay-in & Tegular
smooth texture



RECYCLED
CONTENT
UP TO
85%

LEED V5

Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

	Item No.	Dimensions (Inches)	
CALLA® Health Zone™	2230	24 × 24 × 1"	
15/16" Square Lay-in	2233	24 × 48 × 1"	
	2236	30 × 30 × 1"	
15/16" Square Tegular	2231	24 × 24 × 1"	
	2234	24 × 48 × 1"	
	2237	30 × 30 × 1"	
9/16" Square Tegular	2232	24 × 24 × 1"	
	2232BK	24 × 24 × 1"	
	2232SE	24 × 24 × 1"	
	2235	24 × 48 × 1"	
	2238	30 × 30 × 1"	

1 Ctn Min
FASTSIZE
3 WEEKS
order to ship

1" Thick - 15/16" Square Lay-in & 15/16" & 9/16" Square Tegular

Made-to-Order Sizes	<div>1 Ctn Min FASTSIZE 3 WEEKS order to ship</div>	Width	Length	N/A	N/A	N/A	N/A	Class 0.85	+	*	*	*	*	*	*	*	*	*	*	*	
		4" - 1-1/2"	12" - 72"					A													
		12" - 30"	4" - 72"																		
		30-1/2" - 48"	4" - 24"																		

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

GOOD (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

* Advertised values for light reflectance, wash, scrub and scratch resistance are applicable to White panels only

SUSPENSION SYSTEMS * CAC 29 achieved with Clean Room™ suspension system; not UL® Classified for acoustics.

15/16"			1-1/2"		9/16"				
	Prelude®	Co-Extruded Clean Room™ (Steel or Aluminum)		Co-Extruded Clean Room (Steel or Aluminum)		Silhouette® 1/4" Reveal	Silhouette 1/8" Reveal	Suprafine®	Interlude® XL® HRC

NOTE: Clean Room Class 5 (Class 100) (item 2231) UL Classified for Acoustics on 15/16" suspension system only.

PHYSICAL DATA

Material

Wet-formed mineral fiber with acoustically transparent membrane

Surface Finish

Acoustically transparent membrane with factory-applied latex paint

Fire Performance

Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

ASTM E1264 Classification

Type A, Form A2.2, Pattern G; Fire Class A

Humidity/Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Bacterial/Mold/Mildew

Ceiling tiles with BioBlock® Plus performance resist the growth of odor and stain-producing bacteria as well as mold and mildew on the ceiling tile surface.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor - 2.9 (BTU units)
R Factor - 0.445 (Watts units)

Cleaning and Disinfecting

Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

Only white panels are washable and scrubbable.

Design Considerations

Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight: Square Feet/ Carton

2230, 2231, 2232, 2232BK, 2232SE - 1.0 LBS/SF; 40 SF/CTN
2233, 2234, 2235 - 1.0 LBS/SF; 48 SF/CTN
2236, 2237, 2238 - 1.0 LBS/SF; 50 SF/CTN

Minimum Order Quantity

1 carton

LEED® is a trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; UL is a registered trademark of UL LLC; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC

TechLine / 1 877 276-7876
armstrongceilings.com/healthzone
BPCS-6028-925

Armstrong®
World Industries



MINERAL FIBER - Standard