

3form Elements – Clario

Acoustic Ceiling Panel



3form Elements – Clario ceiling panels in Ebony

Visually-stunning, highly-functional ceiling panels made from sound-absorbing Sola Felt™.


KEY SELECTION ATTRIBUTES

- Made using sustainable, high-performance Sola Felt™ with 50% post-consumer recycled PET
- Available in 22 standard colors
- NRC rating of 0.70
- Choose from 2 sizes to fill any ceiling
- Easy-to-install panels that work with a variety of ceiling systems

3form Elements – Clario

Acoustic Ceiling Panel

SOLA FELT™ COLORS Due to dye lot variations, shade may vary from actual product.




Zinc (FZN)



Nickel (FNI)



Platinum (FPL)



Armor (FAR)



Steel (FSL)



Cast (FCA)



Dune (FDN)




Driftwood (FDW)




Silt (FSI)




Mineral (FML)



Ebony (FBN)



Nightfall (FNF)




Admiral (FAD)



Dusk (FDK)




Steelblue (FSB)



Emerald (FEM)



Mustard (FMU)




Citrine (FCR)




Ochre (FOC)



Aries (FAS)



Saffron (FSF)



Jasper (FJP)

3form Elements – Clario

Acoustic Ceiling Panel

VISUAL SELECTION

	Item No. ◆	Nominal Dimension (W × L)
CLARIO CEILING PANELS	BPAS1S01_ _ _	24" × 24"
	BPAS1S02_ _ _	24" × 48"

◆ When specifying or ordering, include the appropriate 3-digit color suffix (e.g. BPAS1S01D11 E M L).
For custom sizes, shapes, or colors, contact ASQuote@armstrong.com.

PERFORMANCE

Dots represent high level of performance.

Fire Rating	Certified Low VOC Emissions
Class A	*
Class A	*


ACOUSTICAL INFORMATION




0.70

0.70

SYSTEM INSTALLATION DETAILS



2' × 2'

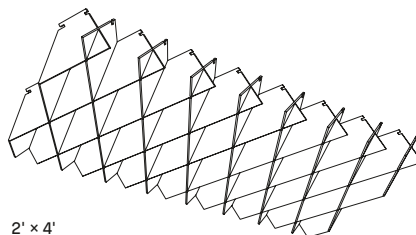

2' × 4'

	Item No.	Description	Quantity
Suspension Systems	7301_ _ _	Prelude® XL® 15/16" 12' HD Main Beam	20 PCS/CTN
	XL7342_ _ _	Prelude 4' Cross Tee	60 PCS/CTN
	XL7328_ _ _	Prelude 2' Cross Tee	60 PCS/CTN
Wall-to-Wall	7800_ _ _	12' Hemmed Angle Molding	30 PCS/CTN
Floating Cloud Installations	AX_ _ STR_ _ _ _	Axiom® Classic Straight Perimeter Trim	Per piece

For the appropriate 3-digit color suffix, please visit armstrong.com/preludexl

PHYSICAL DATA

Material
3/16" thick (4.5 mm) non-woven layered and formed polyester felt (PET) fiber panels with color throughout.

Fire Performance
Flame Spread Index 0-25. Smoke Developed Index 450 or less. Class A per ASTM E84.
CAN/ULC S102 surface burning characteristics.
Flame Spread Index of 40 or less and Smoke Developed Index of 225 or less.

Contact local code official for plenum code considerations related to sprinkler placement.

Application Considerations
Panel color and texture may vary from order to order; adequate attic stock should be ordered. Due to the nature of recycled materials, small dark fibers may be visible on light panels.

Clario panels should not be installed near sources of heat greater than 158° F.

Acoustical Performance
Tested per ASTM C423 and mounted in accordance with ASTM E795. Sound absorption of 0.70 NRC. Contact TechLine for details at techline@armstrong.com.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Considerations
Once removed from the shipping packaging, carefully expand the panels until they achieve their intended dimensional, waffle-like appearance. Finalize the installation by inserting the slotted ends of the panels securely into the existing ceiling system grid.

Lead Times

4 week lead time (not including transit). All lead times are approximate and dependent upon current supply chains.

Cleaning and Disinfecting

Sola Felt should be cleaned regularly by vacuuming or using a soft brush to prevent dirt buildup and weathering; slight fiber shedding is normal. For liquid stains, promptly blot with a damp cloth or mild detergent, avoiding strong solvents, abrasives, or soaking the material. See installation instructions for complete cleaning guidelines.

Warranty

3form 2-year Limited Warranty

Weight; Pieces/Carton

1.60 LBS/panel

Ordered by the carton:

BPAS1S01 – 24" × 24" 4 panels/CTN

BPAS1S02 – 24" × 48" 2 panels/CTN