

CIRRUS® Profiles
 Chamfered, Beveled & Classic Step™
 Tegular
 medium texture



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

Cirrus Profiles – Classic Step panels with Suprafine XL 9/16" suspension system

Medium texture panels, with a variety of dimensional edge details; offer both Sustain® and Total Acoustics® panel performance.

KEY SELECTION ATTRIBUTES


- Get total noise control and floor plan versatility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics performance
- Cirrus® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Classic edge details on refined Cirrus texture
- High quality factory-finished edge detail
- Ideal combination of sound absorption and blocking
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Product – 91%
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

COLOR



White
 (WH)

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)

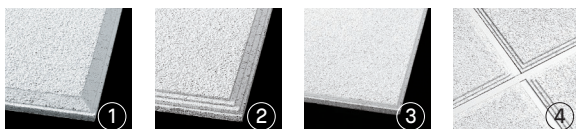

1. Cirrus® Chamfered
2. Cirrus® Classic Step
3. Cirrus® Beveled Tegular
4. Cirrus® Classic Step with Suprafine® 9/16" suspension system

CIRRUS® Profiles

Chamfered, Beveled & Classic Step™

Tegular

medium texture



RECYCLED
CONTENT
UP TO
77%

LEED V5

Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	
CIRRUS® Profiles – Chamfered* 15/16" Tegular	17	628	24 × 24 × 3/4"	
9/16" Tegular	30	557	24 × 24 × 3/4"	
CIRRUS® Profiles – Beveled 9/16" Tegular	29	590	24 × 24 × 3/4"	
CIRRUS® Profiles – Classic Step™ 15/16" Tegular	19	626	24 × 24 × 3/4"	
	18	591	24 × 24 × 3/4"	
9/16" Tegular	31	591	24 × 24 × 3/4"	
	32	585	24 × 24 × 3/4"	

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$


UL Classified Acoustics	Total Acoustics¹	Fire Performance	Light Reflect	Bio-Block	Humi-Guard+	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC =	NRC CAC	Class		Anti-Mold/Mildew	Sag Resistant					
0.65 35	GOOD	Class A	0.85	*	*	*	Std	*	*	*
0.65 35	GOOD	Class A	0.85	*	*	*	Std	*	*	*
0.65 35	GOOD	Class A	0.85	*	Std	*	Std	*	*	10-Yr
0.65 35	GOOD	Class A	0.85	*	Std	*	Std	*	*	10-Yr
0.65 35	GOOD	Class A	0.85	*	*	*	Std	*	*	*
0.65 35	GOOD	Class A	0.85	*	Std	*	Std	*	*	10-Yr

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)

* Ceiling design copyrighted by AWI Licensing LLC.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

ASTM E1264 Classification

Type A, Form A1.2, Pattern F, I; Fire Class A

Humidity/Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes items 585, 590, 626.

Anti-Mold/Mildew

Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 1.9 (BTU units)

R Factor – 0.33 (Watts units)

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton

590, 591 – 1.06 LBS/SF; 48 SF/CTN
557, 585, 626, 628 – 1.17 LBS/SF; 48 SF/CTN

Minimum Order Quantity

1 carton

Metric Items Available

628M, 557M, 590M, 591M, 626M, and 585M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.