CIRRUS® Themes™ Critters™, Leaves™, Stars™, Things That Fly™ & Under the Sea™

Tegular medium texture





Cirrus® Themes™ Critters™ panels with Suprafine® XL® 9/16" suspension system

Medium texture panels with playful designs for a fun addition to your projects.


KEY SELECTION ATTRIBUTES

- A variety of lighthearted panel designs on classic Cirrus texture; can be spot-painted
- Cirrus® Themes® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- · Coordinating plain panels available
- · Mold- and mildew-resistant surface
- · USDA-Certified Biobased Product 91%

COLOR



White (WH)

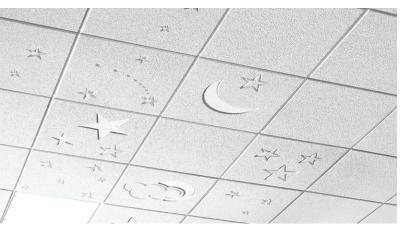

Cirrus® Themes $^{\rm m}$ Stars $^{\rm m}$ panels with Suprafine® XL® 9/16" suspension system



Cirrus® Themes $^{\rm m}$ Leaves $^{\rm m}$ panels with Suprafine® XL® 9/16 $^{\rm m}$ suspension system



Cirrus® Themes $^{\rm w}$ Things That Fly $^{\rm w}$ panels with Suprafine® XL® 9/16" suspension system



Cirrus* Themes* Under The Sea** panels with Suprafine* XL** 9/16** suspension system



\$\$\$\$

CIRRUS® Themes™ Critters™, Leaves[™], Stars[™], Things That Fly[™] & Under the Sea™

Tegular medium texture USDA CERTIFIED BIOBASED PRODUCT

Declare.

SUSTAIN Sustainable Ceiling Systems

Gold Certified (details below)

GREENGUARD

VISHAL	SEL	ECTION	

PERFORMANCE SELECTION Dots represent high level of performance.

armstrongceilings. com/suspdwgs		Item No.	Dimensions (Inches)	UL Clas Acou NRC +	ssified	Total Acoustics¹	Fire Performance	Light Reflect	Anti-Mold/ Block Mildew	Sag Resistant	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	Warranty
CIRRUS® Themes™ 15/16" Angled Tegular	13	See Below	24 × 24 × 3/4"	N/A	N/A	N/A	Class A	0.85	٠	Std	0	Std	0	٠	10-Yr
9/16" Beveled Tegular	29, 44, 48, 52, 56	See Below	24 × 24 × 3/4"	N/A	N/A	N/A	Class A	0.85	٠	Std	•	Std	•	٠	10-Yr

₹

⋪ ☆

S410/S460

₽

ΣŹ

₽

☆ ☆

All images shown in plan view.



৺

খ

ゃ

•ජ

బీ

•්ඊ

\$510/\$560

బి









""。李

\$602/\$652

傪

\$601/\$651 婴

总



CIRRUS Themes Stars



z;

∜

S414/S464







CIRRUS Themes Things That Fly

V

S706/S756









Under the Sea Q

S705/S755

53

S708/S758



CIRRUS Themes





\$805/\$855

Ю.

S804/S854

Must use Item S295 or S299 for Coordinating Plain Panel

S299/S295

Plain

Panel

CIRRUS The	mes Critters	CIRRUS The	mes Leaves	CIRRUS Th	emes Stars	CIRRUS Themes	Things That Fly	CIRRUS Themes Under The Sea		
15/16" Angled Tegular	9/16" Beveled Tegular	15/16" Angled Tegular	9/16" Beveled Tegular							
S550	\$500	\$650	S600	\$450	\$400	S750	S700	\$850	\$800	
S551	S501	S651	S601	S451	S401	S751	S701	S851	S801	
S552	S502	S652	S602	S460	S410	S752	S702	S852	S802	
S553	S503	S653	S603	S461	S411	S753	S703	S853	\$803	
S560	S510	\$654	S604	\$462	S412	S754	S704	\$854	S804	
S562	S512	S655	S605	S463	S413	S755	S705	S855	\$805	
S295	S299	S295	S299	S464	S414	S756	S706	S295	S299	
				S470	S420	S757	S707			
				S471	S421	S758	S708			
				S295	S299	S295	S299			

SUSPENSION SYSTEMS











PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish Factory-applied latex paint

Fire Performance

Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies.

ASTM E1264 Classification
Type III, Form 1, Pattern E I K Z (scored multi-patterned finish) S299, S295 – Type III, Form 1, Pattern E I

> Techline / 1877 276-7876 armstrongceilings.com/cirrusthemes

BPCS-4332-922

Standard performance ceiling panels are recommended where the building is enclosed and the HVAC is continuously functioning.

Anti-Mold/Mildew

Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions GREENGUARD Gold Certified Third-party certified compliant with California Department of Public

Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.



GOLD

Primary (Embodied) Energy See all LCA information on our EPDs.

High Recycled Content

Contains greater than 50% total recycled content.

Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor - 1.9 (BTU units); R Factor - 0.33 (Watts units)

Warranty

Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton All design panels – 1.38 lbs/SF; 8 SF/ctn S295 – 1.09 lbs/SF; 48 SF/ctn S299 – 1.17 lbs/SF; 48 SF/ctn

Minimum Order Quantity



Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.