


# DUNE™

Square Lay-in & Tegular  
fine texture

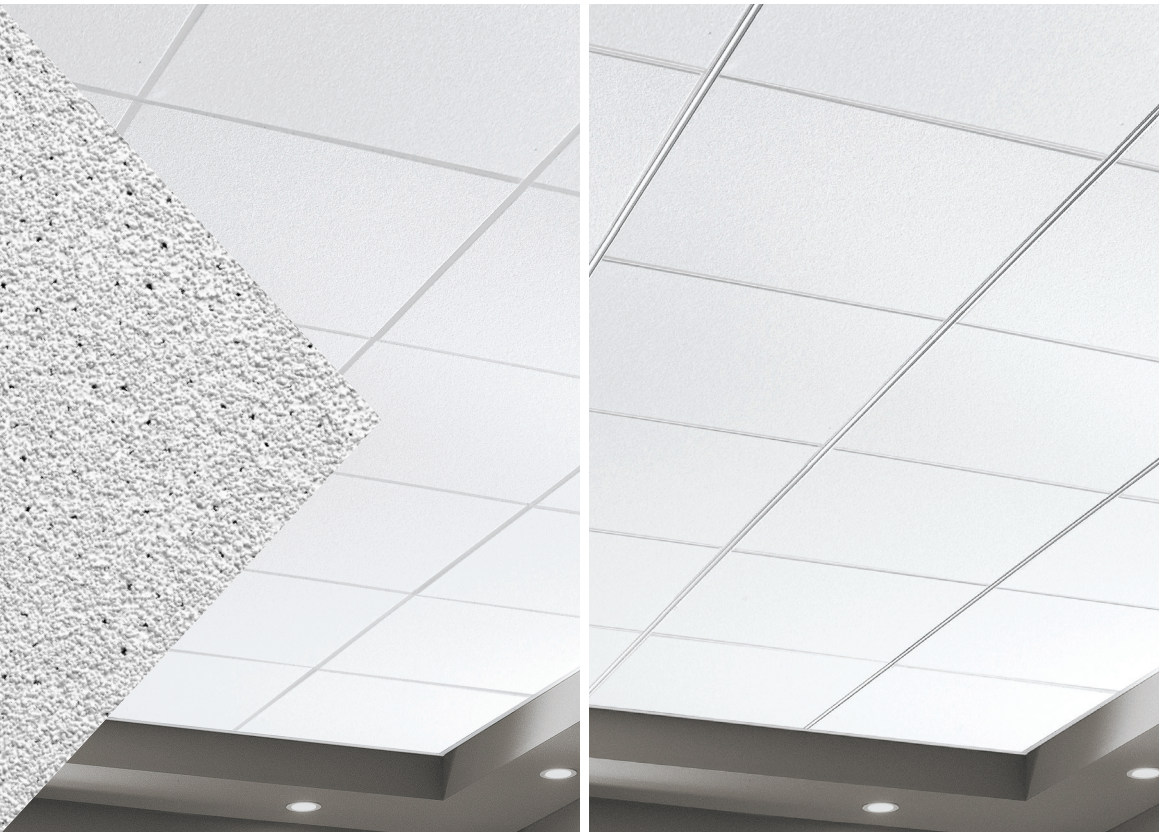

CAD/Revit® drawings at:  
[armstrongceilings.com/cadrevit](http://armstrongceilings.com/cadrevit)

Dune Square Lay-in panels with Prelude XL  
15/16" suspension system

Dune Tegular panels with Interlude XL HRC  
9/16" suspension system

Fine-textured panels are non-directional and durable with standard acoustical performance.

## KEY SELECTION ATTRIBUTES


- Dune™ panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Upgrade look at a modest price
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 1773HRC, 1774HRC, 1775HRC, 1776HRC, 1777HRC (check [armstrongceilings.com/ecomedes](http://armstrongceilings.com/ecomedes))
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Product – 99%
- Durable – Scratch-resistant
- Non-directional visual reduces scrap and installation time
- Product can be recycled through the Armstrong Ceilings Recycling Program
- 30-Year Limited System Warranty against visible sag (excludes items 1796 and 1798), mold and mildew
- 10-Year replacement panel available for items 1772, 1773, 1774, 1776
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant



## COLOR



## DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)

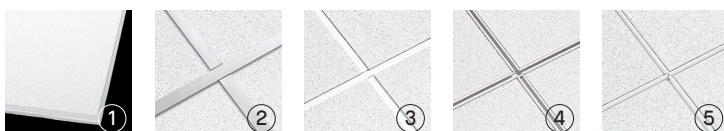

1. Dune™ Tegular
2. Dune™ Square Lay-in with Prelude® 15/16" suspension system
3. Dune™ Tegular with Suprafine® 9/16" suspension system
4. Dune™ Tegular with Silhouette® XL® 9/16" suspension system with 1/4" reveal
5. Dune™ Tegular with Interlude® XL® HRC 9/16" suspension system

DUNE™

Square Lay-in & Tegular  
fine textureUSDA  
CERTIFIED  
BIOBASED  
PRODUCT  
PRODUCT 99%SUSTAIN™  
High Performance  
Sustainable Ceiling Systems

Declare.

RECYCLED  
CONTENTUP TO  
56%

LEED V5

Ecomedes Data

## COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

## VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
DUNE™	1	1772	24 × 24 × 5/8"
15/16" Square Lay-in		1850	24 × 24 × 5/8"
		1773 1773HRC	24 × 48 × 5/8"
		1851	24 × 48 × 5/8"
		1796	20 × 60 × 3/4"
		1798	30 × 30 × 3/4"
		4272	30 × 60 × 3/4"

Made-to-Order  
Sizes4-6  
WEEKS  
order to ship

3/4" or 5/8" Thick – 15/16" Square Lay-in

Width	Length
12" – 30"	18" – 72"

## PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$\$

UL Classified Acoustics	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect	Bio-Block	Humi-Guard+	Certified Low VOC Emissions	DURABILITY	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC =				Anti-Mold/Mildew	Sag Resistant		Scratch			
0.50 30	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Fire Guard™	0.81	*	*	*	*	Std	*	*
0.50 30	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Fire Guard	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Class A	0.81	*	Std	*	*	*	*	1-Yr
0.50 35	N/A	Class A	0.81	*	Std	*	*	*	*	1-Yr
0.50 35	N/A	Class A	0.81	*	Std	*	*	*	*	1-Yr


MORE ITEMS ►

Red Numbers are Fire Guard items.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

## SUSPENSION SYSTEMS

15/16"

Prelude® XL®  
Prelude® XL®  
Fire Guard

## PHYSICAL DATA

## Material

Wet-formed mineral fiber

## Surface Finish

Factory-applied latex paint

## Fire Performance

Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies.

## ASTM E1264 Classification

Type A, Form A1.2, Pattern E; Fire Class A

## Humidity/Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes large made-to-order panels.

## Anti-Mold/Mildew

Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

## Acoustical Performance

CAC testing conducted using Prelude® suspension system.

## VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

## High Recycled Content

Contains greater than 50% total recycled content.

Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. HRC items contain 15% or greater post-consumer recycled ceilings.

## Insulation Value

R Factor – 1.6 (BTU units)

R Factor – 0.28 (Watts units)

## 30-Year Performance Guarantee &amp; Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty (Excludes items 1796, 1798, and large other size panels)

## Weight; Square Feet/Carton

1772 – 0.94 LBS/SF; 64 SF/CTN

1773 – 0.88 LBS/SF; 64 SF/CTN

1796 – 1.33 LBS/SF; 67 SF/CTN

1798 – 1.14 LBS/SF; 50 SF/CTN

1850 – 1.19 LBS/SF; 48 SF/CTN

1851 – 1.22 LBS/SF; 64 SF/CTN

4272 – 1.14 LBS/SF; 75 SF/CTN

## Minimum Order Quantity

1 carton, excludes made-to-order panels

## Metric Items Available

1772M, 1850M, 1773M, 1851M, 1796M,

1798M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine 877 276-7876

armstrongceilings.com/dune

Armstrong®  
World Industries

MINERAL FIBER – Standard

# DUNE™

Square Lay-in & Tegular  
fine texture



RECYCLED  
CONTENT  
UP TO  
**56%**

LEED V5

Ecomedes Data

#### COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

## VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	
DUNE™ 15/16" Angled Tegular	12	1774	24 × 24 × 5/8"	□
		1774HRC	24 × 24 × 5/8"	□
	29	1853	24 × 24 × 5/8"	□
		1776	24 × 48 × 5/8"	□
9/16" Beveled Tegular	44	1775	24 × 24 × 5/8"	□
		1775HRC	24 × 24 × 5/8"	□
	52	1852	24 × 24 × 5/8"	□
		1777	24 × 48 × 5/8"	□
Made-to-Order Sizes	56	1777HRC	24 × 48 × 5/8"	□

3/4" or 5/8" Thick – 15/16" & 9/16" Angled Tegular

## PERFORMANCE SELECTION

Dots represent high level of performance.


\$\$\$

UL Classified Acoustics	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	DURABILITY	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC =							Scratch			
0.50 35	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Fire Guard™	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Fire Guard	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Class A	0.81	*	*	*	*	Std	*	*
N/A	N/A	Class A	0.81	*	Std	*	*	Std	*	1-Yr

Red Numbers are Fire Guard items.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

## SUSPENSION SYSTEMS



## PHYSICAL DATA

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies (Class A)

**ASTM E1264 Classification**  
Type A, Form A1.2, Pattern E; Fire Class A

**Humidity/Sag Resistance**  
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes large made-to-order panels.

**Anti-Mold/Mildew**  
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

**Acoustical Performance**  
CAC testing conducted using Prelude suspension system.

**VOC Emissions**  
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**High Recycled Content**  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. HRC items contain 15% or greater post-consumer recycled ceilings.

**Insulation Value**  
R Factor – 1.6 (BTU units)  
R Factor – 0.28 (Watts units)

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

**Weight; Square Feet/ Carton**  
1774, 1774HRC, 1775, 1775HRC – 0.75 LBS/SF; 64 SF/CTN  
1776, 1776HRC, 1777, 1777HRC – 0.75 LBS/SF; 64 SF/CTN  
1852, 1853 – 1.20 LBS/SF; 48 SF/CTN

**Minimum Order Quantity**  
1 carton, excludes made-to-order panels

**Metric Items Available**  
1775M, 1777M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.