


LYRA® PB
with Plant-based Binder
Tegular and Square Lay-In – Wood Looks
smooth texture



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



Lyra PB Tegular panels in Toffee Chestnut with Suprafine® XL 9/16" suspension system



Lyra PB Tegular in Bourbon Cherry

Lyra® PB wood-look panels provide the natural beauty of large format wood ceilings with superior sound absorption and sustainability attributes without the expense.

KEY SELECTION ATTRIBUTES

- Superior sound absorption: Lyra PB panels provide up to 0.95 NRC
- Lyra PB panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Mold- and mildew-resistant surface
- Lightweight panels offer fast and easy installation on standard 15/16" and 9/16" suspension system
- Sag-resistant: perfect for high-humidity applications
- Fast lead times
- Axiom® Trim options available for cloud applications
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Compatible with TechZone® Ceiling Systems
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant
- 30-Year Limited System Warranty against visible sag, mold, and mildew

COLORS Due to printing limitations, shade may vary from actual product.

Standard Wood-look Visuals (9/16" Square Tegular)



9/16" Square Tegular – 1 Ctn. Min Order Qty in Standard Sizes
15/16" Square Tegular and Square Lay-in – 500 SF Min Order Qty

Made-to-order Wood-look Visuals (9/16" & 15/16" Square Tegular)



500 SF Min Order Qty.
All quotes must be sent to ABPSpecials@armstrongceilings.com

All Wood-look Visuals are available Made-to-order in 15/16" Square Lay-in. 500 SF Min Order Qty. All quotes must be sent to ABPSpecials@armstrongceilings.com

DETAILS



Lyra PB Square Tegular, Brown Sugar Walnut with color-coordinated painted edges

TechLine 877 276-7876
armstrongceilings.com/lyra

Armstrong®
World Industries

LYRA® PB
with Plant-based Binder
Tegular and Square Lay-In – Wood Looks
smooth texture



**PLANT
BASED
BINDER**
As Noted



RECYCLED
CONTENT

UP TO
71%

LEED V5

Ecomedes Data

COMMON MATERIALS FRAMEWORK


Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

STANDARD WOOD-LOOK VISUALS (9/16" Square Tegular) Color-coordinated painted tegular panel edges and recommended standard Suprafine XL Suspension System colors shown below.



MADE-TO-ORDER WOOD-LOOK VISUALS (Available in 9/16" & 15/16" Square Tegular)

500 SF minimum order quantity. Color-coordinated painted tegular panel edges and recommended standard Suprafine XL Suspension System colors shown below.

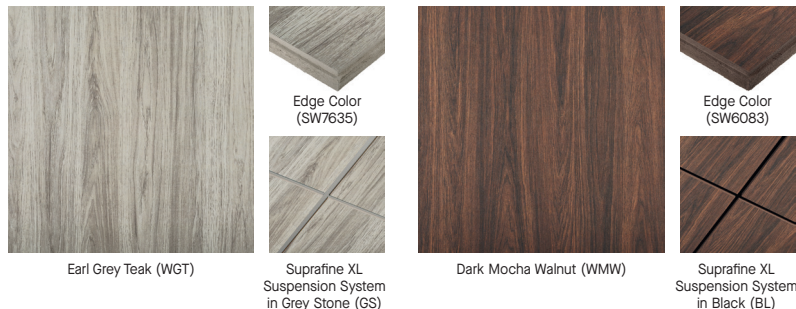


All Wood-look Visuals are available Made-to-order in 15/16" Square Lay-in. 500 SF Min Order Qty. All quotes must be sent to ABPSpecials@armstrongceilings.com

RECOMMENDED CUSTOM SUSPENSION SYSTEM COLORS

To minimize the suspension system visual, select the custom Sherwin-Williams® color code noted below.

Brown Sugar Walnut (WBS) Dark Mocha Walnut (WMW) Bourbon Cherry (WBC)



Suprafine XL suspension system in SW6083
Suprafine XL suspension system in SW6083
Suprafine XL suspension system in SW7705



Armstrong®
World Industries

LYRA® PB
with Plant-based Binder
Tegular and Square Lay-In – Wood Looks
smooth texture



RECYCLED
CONTENT
UP TO
71%

LEED V5

Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg. Item No.	Dimensions (Inches)
LYRA® with Plant-based Binder	26, 8356PBWBS 43, 8356PBWTC 47, 8356PBWVA	Walnut Brown Sugar Toffee Chestnut Vanilla Ash 48 × 48 × 1"
Wood-look Visuals	51, 8356PBWHO 55, 8356PBWBC	Honey Oak Bourbon Cherry 48 × 48 × 1"
9/16" Square Tegular	8356PBWGT† 8356PBWMW†	Earl Grey Teak Dark Mocha Walnut 48 × 48 × 1"

1" Thick – 15/16" & 9/16" Square Tegular

Made-to-Order Sizes and Colors for Wood-look Panels	Width (short side)	Length (long side)
3-4 WEEKS order to ship	4" – 6"	9" – 72"
	12" – 24"	4" – 96"
	28"	4" – 72"
	30" – 48"	4" – 60"

Visit the product page online and see "Configure an Item" to verify capabilities.
Questions? email Techline@armstrongceilings.com

Wood looks are not available via the FastSize™ program.

All Lyra PB Square Lay-In Wood-look items are made-to-order

† Made-to-order item. 500 SF minimum order quantity applies. Available in 9/16" and 15/16" Square Tegular.

1 Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

All Wood-look Visuals are available Made-to-order in 15/16" Square Lay-in. 500 SF Min Order Qty. All quotes must be sent to ABPSpecials@armstrongceilings.com

PERFORMANCE SELECTION Dots represent high level of performance.

\$\$\$


UL Classified Acoustics	Total Acoustics†	Articulation Class	Fire Performance	Bio-Block Anti-Mold/Mildew	Humi-Guard+ Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	DURABILITY	30-Yr Warranty
NRC + CAC =									
0.95	N/A	N/A	190	Class A	*	*	*	*	*
0.95	N/A	N/A	190	Class A	*	*	*	*	*
N/A	N/A	N/A	Class A	*	*	*	*	*	*

ACCESSORIES (must be ordered separately)

435 Stabilizer Clip (3/4" & 1")
Recommended for panels 60" and greater in length
NOTE: Panels 60" up to 96" – One clip near mid-point of each long edge. Panels 96" and over – Two clips at 1/3 points of each long edge.

7870 Spring Border Clip
(For installations with the panel resting on the wall molding)

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Fiberglass with plant-based binder and acoustically transparent membrane

Surface Finish
Acoustically transparent membrane with factory-applied latex paint.

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less.

ASTM E1264 Classification
Type B, Form B2, Pattern G Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content based on produced composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Insulation Value
R Factor – 4.4 (BTU units); R Factor – 0.70 (Watts units)

Design Consideration
Physical product samples for standard colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products.

Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

Design Consideration: Wood-Look Panels

All wood-look panels are produced with wood grain parallel to the panel length. Wood-look visuals are not dye-lotted, but are designed to mimic slight color variations as seen in real wood.

Cleaning and Disinfecting

Cleaning and CDC-recommended disinfecting options available on armstrongceilings.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight: Square Feet/Carton
8356PB – 0.46 LBS/SF; 96 SF/CTN
8361PB – 0.50 LBS/SF; 48 SF/CTN
8357PB – 0.46 LBS/SF; 96 SF/CTN
8365PB – 0.50 LBS/SF; 100 SF/CTN
8381PB – 0.50 LBS/SF; 72 SF/CTN
8382PB – 0.50 LBS/SF; 96 SF/CTN
8359PB – 0.46 LBS/SF; 75 SF/CTN
8461PB – 0.44 LBS/SF; 70 SF/CTN

Minimum Order Quantity
1 carton for all standard items in 9/16" Square Tegular
500 SF minimum order quantities apply to wood-look visuals WGT, WMW, and made-to-order sizes (including 15/16" Tegular and Square Lay-In) in all wood-look visuals.