

# METALWORKS™ for DESIGNFLEX®

Tegular – Squares & Rectangles  
smooth texture



## DESIGNFLEX® CEILING SYSTEMS

### PERSONALIZE YOUR DESIGN!

Mix and match different sizes, shapes, colors, and materials to reinvent your ceiling. More at:  
[armstrongceilings.com/designflex](http://armstrongceilings.com/designflex)

CAD/Revit® drawings at:  
[armstrongceilings.com/cadrevit](http://armstrongceilings.com/cadrevit)

### plus capabilities to do more



[armstrongceilings.com/capabilities](http://armstrongceilings.com/capabilities)  
See more photos at:  
[armstrongceilings.com/photogallery](http://armstrongceilings.com/photogallery)

MetalWorks Tegular for DesignFlex

Personalize your design and get acoustical performance with MetalWorks™ for DesignFlex® perforated panels.

### KEY SELECTION ATTRIBUTES

- DesignFlex® options for sizes and colors
- Mix and match – Shapes for DesignFlex® also available with Calla®, Lyra®, Ultima®, Optima®, and MetalWorks™ panels
- MetalWorks™ FASTPeel™ panels feature an easier-to-remove protective film


- MetalWorks™ for DesignFlex® panels can be combined with other DesignFlex® product families
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim

- Lighting and MEP integration with TechZone®, or with standard modular and pendant lights
- Perforations available to enhance acoustical performance and design aesthetics


- Outstanding NRC with acoustical fleece or infill panel (0.65 – 0.90)
- Easy-to-cut BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits
- Aluminum panels with exceptional durability – Washable, Scrubbable, Soil-resistant
- Part of the Sustain™ portfolio, and meets the most stringent industry sustainability compliance standards today



**COLORS** Due to printing limitations, shade may vary from actual product.


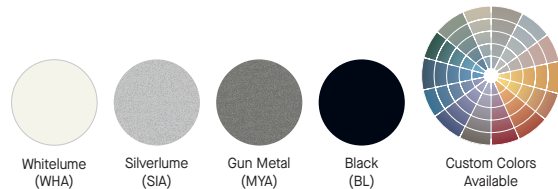


### DETAILS



MetalWorks Tegular unperforated

### PERFORATION OPTIONS (1:2 scale shown)



*Custom Perforations Available*

# METALWORKS™ for DESIGNFLEX®

Tegular – Squares & Rectangles  
smooth texture



Declare.

RECYCLED  
CONTENT

UP TO  
15%

LEED V5

COMMON MATERIALS FRAMEWORK

Human Health **Declare Label**  
HPD  
3rd Party CDPH

Climate Health

Ecosystem Health

Circular Economy

Acoustics

EPD

EPD

✓

✓

## VISUAL SELECTION

	Item No. ♦	Dimensions Nominal W x L (Inches)	Perforations
<b>METALWORKS™</b> (with acoustical fleece)  <b>9/16"</b> <b>Square Tegular</b> 	<b>6647</b> _ _ _ _	6" x 6" □	M1, M15, M19
	<b>6648</b> _ _ _ _	6" x 12" □	M1, M15, M19
	<b>6649</b> _ _ _ _	6" x 48" □	M1, M15, M19
	<b>6650</b> _ _ _ _	6" x 60" □	M1, M15, M19
	<b>6643</b> _ _ _ _	12" x 48" □	M1, M15, M19
	<b>8225</b> _ _ _ _	12" x 60" □	M1, M15, M19
	<b>6641</b> _ _ _ _	24" x 24" □	M1, M15, M19
	<b>6644</b> _ _ _ _	24" x 42" □	M1, M15, M19
	<b>6642</b> _ _ _ _	24" x 48" □	M1, M15, M19
	<b>8226</b> _ _ _ _	24" x 60" □	M1, M15, M19
	<b>8227</b> _ _ _ _	24" x 72" □	M1, M15, M19
	<b>6645</b> _ _ _ _	27" x 30" □	M1, M15, M19
	<b>8228</b> _ _ _ _	28" x 30" □	M1, M15, M19
	<b>8229</b> _ _ _ _	28" x 60" □	M1, M15, M19
	<b>6646</b> _ _ _ _	30" x 30" □	M1, M15, M19

♦ When specifying or ordering, include the appropriate perforation, letter color, and, if needed, coating suffix with the item number (e.g., 6099 **M** **1** **W** **H** **A**).  
NOTE: Order any dimension at asquote@armstrongceilings.com

## PERFORMANCE

Dots represent high level of performance.

(White only)	Light Reflect	CleanAssure™ Disinfectable Panels	DURABILITY					
			Fog	Spray	Wipe	Wash	Scrub	Soil
	Light Reflect							
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								
0.75 (M1)								

## ACOUSTICAL INFORMATION

Perforation		NRC with acoustical fleece	NRC with 1" fiberglass infill *
<b>M1</b>	Unperforated	N/A	N/A
<b>M15</b>	Rd 1612	0.80	0.90
<b>M19</b>	Rg 3220	0.75	0.90

\* Maximum NRC achieved with acoustical infill (item 8200T10).

EXAMPLE:


**6646 M1 WHA**  
 Panel Dimension/Type: 15/16" Square Tegular  
 Perforation: M1 Unperforated  
 Finish: White

## ACCESSORIES

Item No. ♦♦	Description	Colors	Dimensions (Inches)	Pieces/Carton
<b>6099</b> _	Edge Cap for Cut Tegular Panels for 9/16" suspension systems**	MY, SG, WH, BL	Nominal 24" length	50
<b>5823</b>	BioAcoustic™ Infill Panel (Black – Matte)	N/A	24" x 24" x 5/8"	12
<b>8200T10</b>	1" Fiberglass Infill Bag (Black – Gloss)	N/A	24" x 24"	12

♦♦ When specifying or ordering, include the appropriate 2-letter color suffix with the item number (e.g., 6098 **B** **L**).  
\*\* 24" Edge Caps needed for product longer than 24"

## SUSPENSION SYSTEMS



## PARTNER COMPANIES

For more information on our partner companies, please visit [armstrongceilings.com/partners](http://armstrongceilings.com/partners)

Compatible with:  
Axis Geometrix™ Lighting,  
JLC-Tech T-BAR FLEX® LED®  
Lights and Price diffusers.



Shaped infill panels are available through [asquote@armstrongceilings.com](mailto:asquote@armstrongceilings.com) for specific partner lighting fixtures.

## PHYSICAL DATA

**Material**  
Aluminum – 0.040" thickness

**Surface Finish**  
Factory-applied polyester paint finish

Custom colors also available. Contact TechLine for custom color matching requests at 1 877 276-7876.

### Fire Performance

Class A: Painted aluminum tested per ASTM E84 and CAN/ULC S102. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. Laminated finishes tested per ASTM E84. Flame Spread Index 75 or less. Smoke Developed Index 450 or less.

### Acoustical Performance

CAC testing conducted using Silhouette® for 9/16" edge detail.

### ASTM E1264 Classification

Fire Class – Class A  
Unperforated – Type XX, Pattern G  
Perforated – Type XX, Pattern C

### Design Considerations

Silverlume (SIA) and Gun Metal (MYA) finishes are directional, marked with arrows from the factory. Visit [armstrongceilings.com/patterngallery](http://armstrongceilings.com/patterngallery) to see pre-designed patterns and colors.

### Seismic Restraint

MetalWorks™ Tegular panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

### Cleaning and Disinfecting

Cleaning and CDC-approved disinfecting options available on [armstrongceilings.com/cleaning](http://armstrongceilings.com/cleaning)

### Warranty

Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)

### Weight; Pounds/PC (Bulk Packed)

6647 – 0.138 LBS/PC	6642 – 4.400 LBS/PC
6648 – 0.275 LBS/PC	8226 – 5.500 LBS/PC
6649 – 1.100 LBS/PC	8227 – 6.600 LBS/PC
6650 – 1.375 LBS/PC	6645 – 3.094 LBS/PC
6641, 6643 – 2.200 LBS/PC	8228 – 3.208 LBS/PC
8225 – 2.750 LBS/PC	8229 – 6.417 LBS/PC
6644 – 3.850 LBS/PC	6646 – 3.438 LBS/PC