



# WOODWORKS® ACGI Flat Panel

Series 3

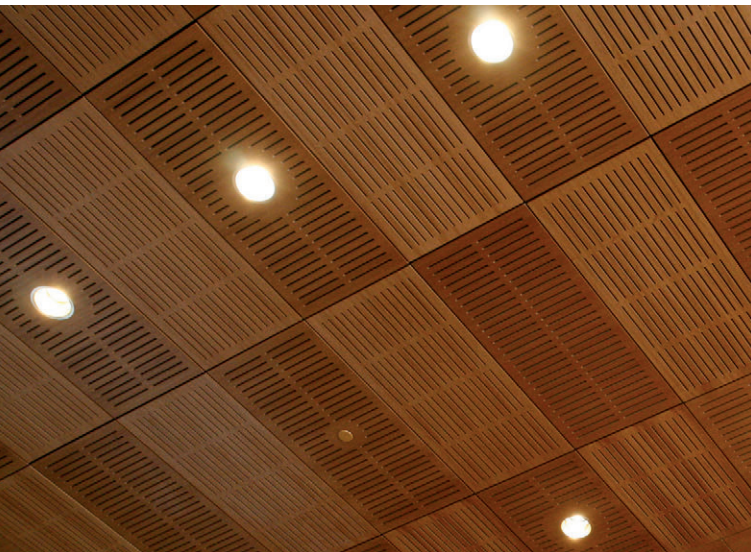

Flat Panel Series 3 (SS3) is a ceiling panel system with a reveal edge suspension to hang below the Armstrong® Prelude® XL® grid to create 3/8" reveal between panels. Panels incorporate a lift and shift for accessibility.


Perforation options control sound absorption, and acoustic insulation is added behind panels for better acoustical performance.

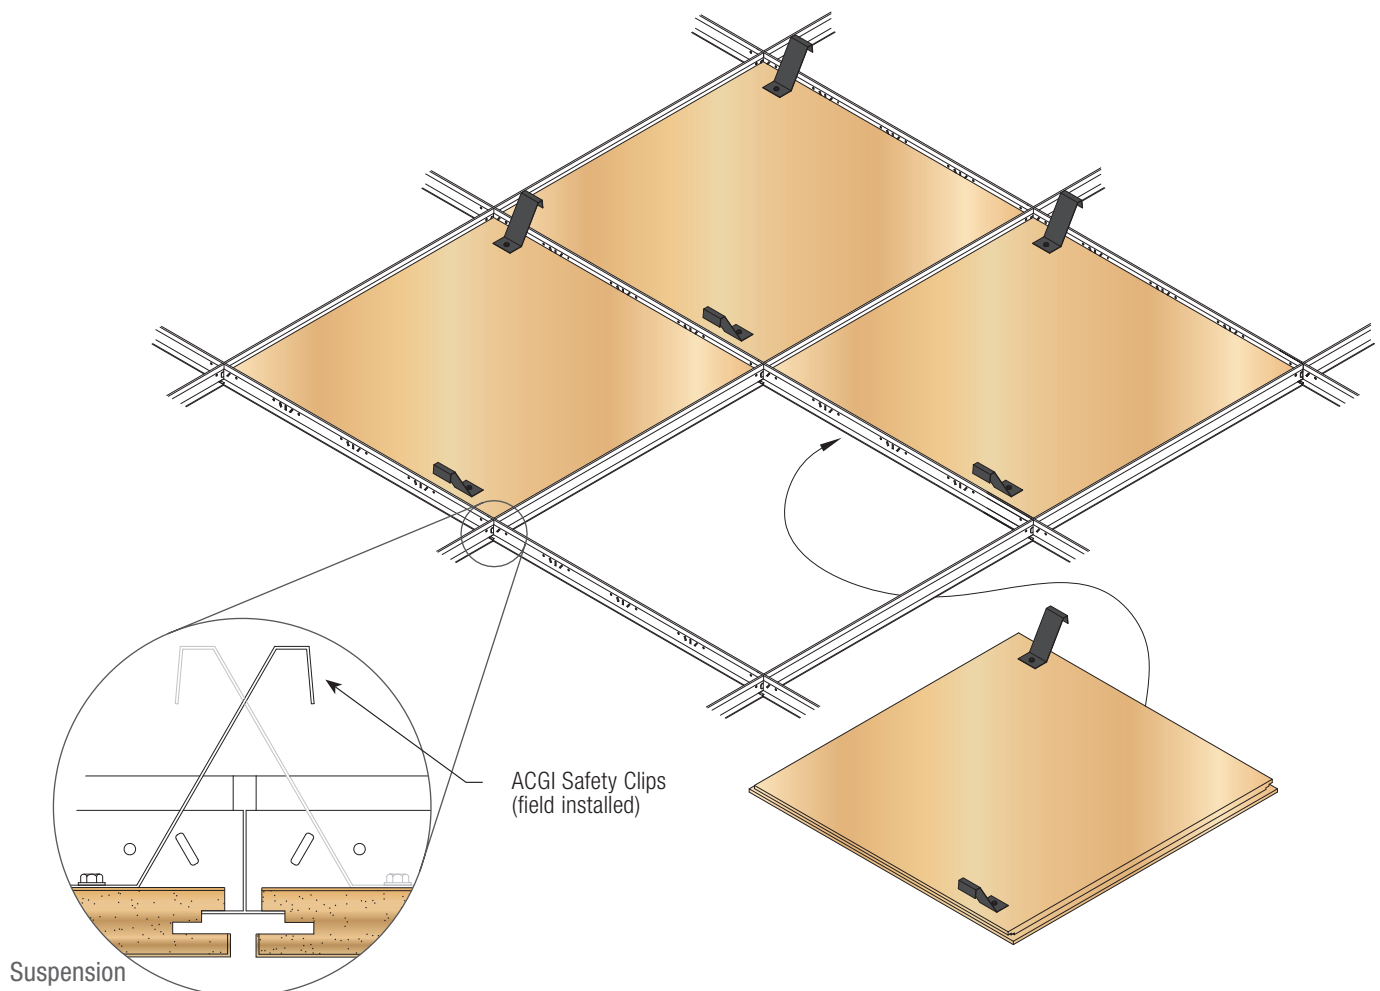

# WOODWORKS® ACGI Flat Panel

Series 3

How To Spec Perforated Patterns...

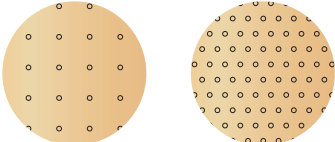

ParallelOffset

Series

3/4" Panel Thickness

Alignment (Parallel or Offset)

Height

Width

Perforation Size

Spacing (Horizontal & Vertical)


**SS3-2424-C-P832-P**

What It Means...

Flat Panel Series 3

24" x 24" panel, 3/4" thick, and 8mm perforations spaced 32mm O.C. vertically and horizontally with parallel alignment.

How To Spec Slotted Patterns...

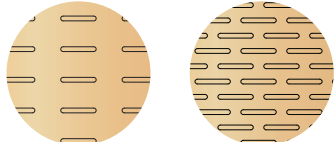

ParallelOffset

Series

3/4" Panel Thickness

Alignment (Parallel or Offset)

Height

Width

Slot Size

Spacing (Horizontal & Vertical)


**SS3-2424-C-S832-32-O**

What It Means...

Flat Panel Series 3

24" x 24" panel, 3/4" thick, and 8mm x 32mm slots spaced 32mm O.C. vertically and horizontally with offset alignment.

How To Spec MicroPerf Patterns...



Offset

Series

3/4" Panel Thickness

Alignment (Parallel or Offset)

Height

Width

MicroPerf (0.55mm perforations)

**SS3-2424-C-MP55-P**

What It Means...

Flat Panel Series 3

24" x 24" panel, 3/4" thick, and 0.55mm perforations spaced 2mm O.C. vertically and horizontally with offset alignment.

Flat Panel Series 3 – Specification Information						
Product No.	Suspension	Reveal	Width	Length	Typical Thickness	Panel Weight
SS3-###-C	Prelude® XL® Grid	3/8"	Up to 2'	2' & 4'	3/4"	3 lbs/sq. ft.

**ACOUSTICS**

NRC up to 0.85

**LEED® CREDIT**

Depending upon product it may contribute to LEED credits. Contact us for more information.

**SPECIES + STAINS**

Flat Panel Systems are available in a variety of Veneer Species and custom stains. Please see Wood Species + Stain Catalog. Contact us for more information.

**FIRE RATING**

Veneer Wood (Non-Perforated) – Class A: ASTM E84 surface burning characteristics.

**DELIVERY, STORAGE & HANDLING (FOR INTERIOR APPLICATION ONLY)**

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors, and wet-work must be complete before installation. Handle carefully to avoid damaging.

**WARRANTY**

Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)