



WOODWORKS® ACGI Flat Panel

Series 7

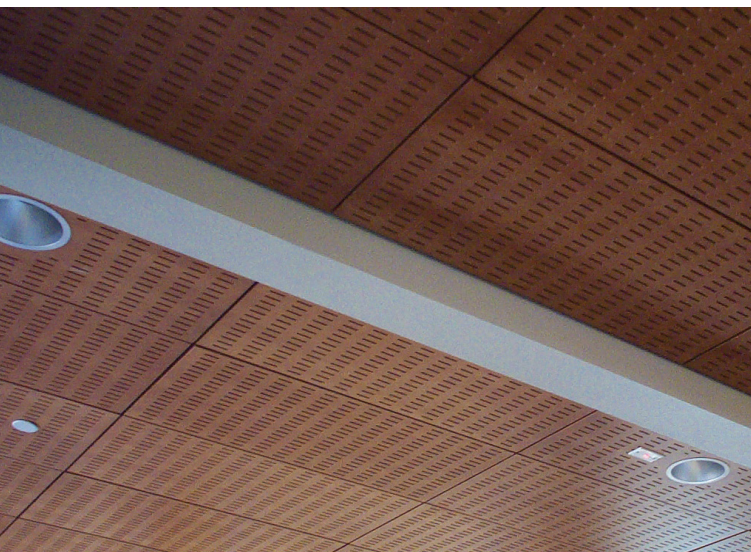

Flat Panel Series 7 (SS7) is available in standard and custom sizes up to 3ft wide and 10ft long to meet particular design requirements. Special surface patterns and logos can also be incorporated into the manufacture of the panels. Perforation options control sound absorption, and acoustic insulation is added behind panels for greater NRC performance. Acoustical fabric is attached to the back of the perforated panels to increase acoustical absorption.


Flat panel Series 7 (SS7) uses a torsion spring suspension system. Panels are suspended from Prelude® XL® Grid. SS7 can be a full or semi accessible ceiling system. Large format panels are reinforced with a support frame on back of the panels.

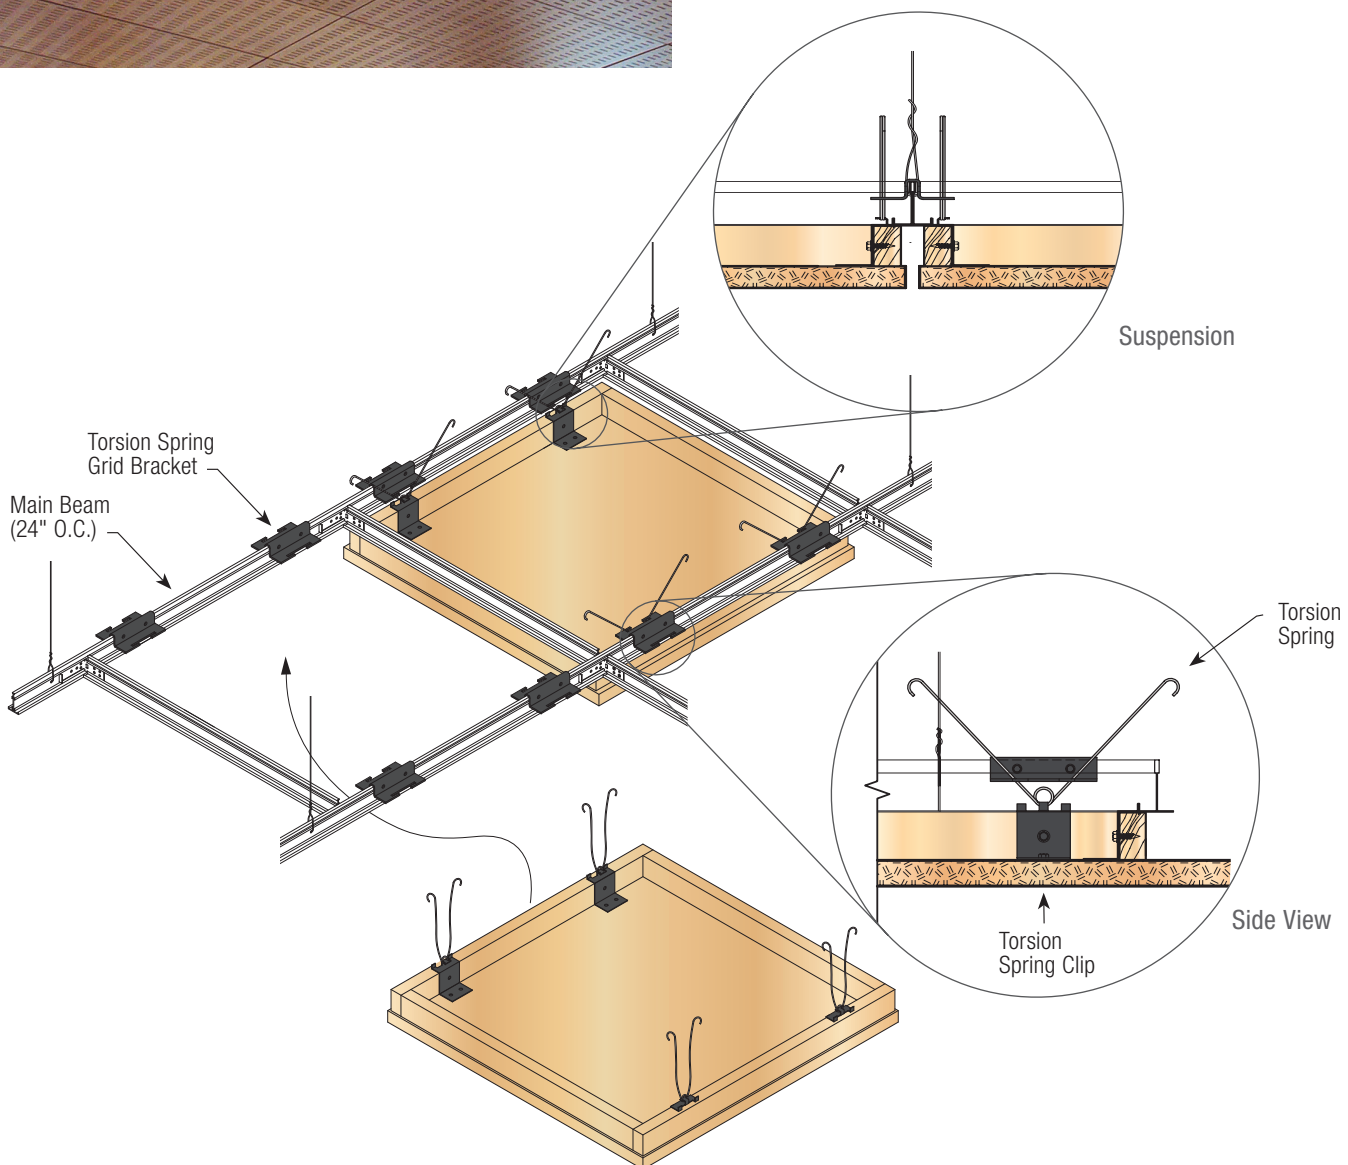

WOODWORKS® ACGI Flat Panel

Series 7

How To Spec Perforated Patterns...



ParallelOffset

Series

3/4" Panel Thickness

Height

Alignment (Parallel or Offset)

Width

Perforation Size

Spacing (Horizontal & Vertical)


SS7-2424-C-P832-P

What It Means...

Flat Panel Series 7

24" x 24" panel, 3/4" thick, and 8mm perforations spaced 32mm O.C. vertically and horizontally with parallel alignment.

How To Spec Slotted Patterns...



ParallelOffset

Series

3/4" Panel Thickness

Height

Alignment (Parallel or Offset)

Width

Slot Size

Spacing (Horizontal & Vertical)


SS7-2424-C-S832-32-0

What It Means...

Flat Panel Series 7

24" x 24" panel, 3/4" thick, and 8mm x 32mm slots spaced 32mm O.C. vertically and horizontally with offset alignment.

How To Spec MicroPerf Patterns...



Offset

Series

3/4" Panel Thickness

Height

Alignment (Parallel or Offset)

Width

MicroPerf (0.55 mm perforations)

SS7-2424-C-MP.55-P

What It Means...

Flat Panel Series 7

24" x 24" panel, 3/4" thick, and 0.55mm perforations spaced 2mm O.C. vertically and horizontally with offset alignment.

Flat Panel Series 7 – Specification Information						
Product No.	Suspension	Reveal	Width	Length (limited by veneer)	Typical Thickness	Panel Weight
SS7-####-C	Prelude® XL® Grid	3/8" min.	Up to 2'	Up to 8'	3/4"	4 lbs/sq. ft.

ACOUSTICS

NRC up to 0.85

LEED® CREDIT

Depending on the product it may contribute to LEED credits. Contact us for more information.

SPECIES + STAINS

Flat Panel Systems are available in a variety of veneer species and custom stains. Please see Wood Species + Stain Catalog. Contact us for more information.

FIRE RATING

Veneer Wood (Non-Perforated) – Class A: ASTM E84 surface burning characteristics.

DELIVERY, STORAGE & HANDLING (FOR INTERIOR APPLICATION ONLY)

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors, and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

Details at armstrongceilings.com/warranty