

FRAMEALL® Drywall Grid

Drywall Suspension System & Components


Submittal Information



MAIN BEAMS & CROSS TEES


VISUAL SELECTION

	Item No.	Length	Height
Drywall Main Beams – Imperial	HD8906	144"	1-11/16"



HD8906F08*	144"	1-11/16"
HD8906F16*		

Drywall Cross Tees – Imperial	XL8965	72"	1-1/2"
-------------------------------	---------------	-----	--------



XL8945P	48"	1-1/2"
----------------	-----	--------

PACKAGING

Pcs./Ctn.	LF./Ctn.
12	144

12	144
----	-----

36	216
----	-----

36	144
----	-----

LOAD TEST DATA (LBS./LF)

L/240 Simple Span			L/360 Simple Span		
24"	36"	48"	24"	36"	48"
120.0	48.95	28.14	95.5	43.19	18.66

N/A	N/A	18.4	N/A	N/A	12.3
-----	-----	------	-----	-----	------

L/240 Simple Span			L/360 Simple Span		
6.87 @ 72"			4.58 @ 72"		


22.5 @ 48"			14.27 @ 48"		
------------	--	--	-------------	--	--

Red Numbers are Fire Guard items. For fire-rated assemblies, use Type C gypsum board as noted in the UL® fire-rated assembly designs.
NOTE: All load test data based on flat installation per ASTM C635.
* These items are NOT Type F fixture compatible


WALL & ANGLE MOLDINGS

VISUAL SELECTION

	Item No.	Length	Height	Metal Thickness
Knurled Angle Molding	KAM10	120"	1-1/4"	0.018"
	KAM12	144"	1-1/4"	0.018"
	KAM12G90	144"	1-1/4"	0.018"
	KAM1510	120"	1-1/2"	0.018"
	KAM1512	144"	1-1/2"	0.018"
	KAM151020E	120"	1-1/2"	0.028"
	KAM151220E	144"	1-1/2"	0.028"
	KAM151020	120"	1-1/2"	0.033"
	KAM1525G90	120"	1-1/2"	0.018"
	KAM1520G90	120"	1-1/2"	0.033"
	KAM21025	144"	2"	0.018"
	KAM21020EQ	120"	2"	0.028"
	KAM21020	120"	2"	0.033"



SimpleCurve KAM	SC151220EQ (Min. 37" Radius)	148"	1-1/2"	0.028"
	SC151225 (Min. 32" Radius)	148"	1-1/2"	0.018"
	SC21220EQ (Min. 55" Radius)	148"	2"	0.028"
	SC21225 (Min. 40" Radius)	148"	2"	0.018"



PACKAGING

PCS/CTN	LF/CTN
10	100
10	120
10	120
10	100
10	120
10	100
10	120
10	100
10	100
10	100
10	100
10	100
10	124
10	124
10	124
10	124

NOTE: .018" metal thickness meets ASTM C645 for framing

See SimpleCurve and KAM Data Sheet for additional items.

FRAMEALL® Drywall Grid

Drywall Suspension System & Components

Submittal Information

SHORTSPAN® TEES & LOCKING ANGLE MOLDING (LAM)

VISUAL SELECTION

	Item No.	Length	Height
	S7708P	96"	1-13/16"
	S7710P	120"	1-13/16"
	S7712P	144"	1-13/16"
	S7714P	168"	1-13/16"

PACKAGING

PCS/ CTN	LF/ CTN
12	96
12	120
12	144
12	168

LOAD TEST DATA (LBS/LF)


L/240 Simple Span

36"	48"	60"	72"	84"	96"	102"	108"
N/A	36.7	19.1	11.2	7.2	4.8	N/A	N/A
N/A	36.7	19.1	11.2	7.2	4.8	4.0	3.3
N/A	36.7	19.1	11.2	7.2	4.8	4.0	3.3
N/A	36.7	19.1	11.2	7.2	4.8	4.0	3.3

 Custom Length
ShortSpan
Size Capabilities

Red Numbers are Fire Guard items.

VISUAL SELECTION

	Item No.	Length	Height	Metal Thickness
	LAM12	144"	1-1/4"	0.018"
	LAM12HRC	144"	1-1/4"	0.018"
	LAM151220E	144"	1-1/2"	0.028"
Locking Angle Molding for Soffits 	LAM151220ES	144"	1-1/2"	0.028"



PACKAGING

PCS/ CTN	LF/ CTN
20	240
20	240
10	120
10	120

NOTE: .018" metal thickness meets ASTM C645 for framing

SIMPLESOFFIT®

VISUAL SELECTION

	Item No.	Description	Dimensions (Inches)	Length	Rout Spacing	LOAD TOTAL DATA* (LBS/LF)				PCS/ CTN	LF/ CTN
						36"	48"	L/240	L/360		
	SSLU2424	L Soffit Upturn 24" x 24"	1-1/2" x 1-1/4"	48"	Routs 8" O.C. beginning at bend	47.5	32.0	20.5	13.7	12	48
	SSLU4824	L Soffit Upturn 48" x 24"	1-1/2" x 1-1/4"	72"	Routs 8" O.C. beginning at bend	47.5	32.0	20.5	13.7	12	72
	SSLU3636	L Soffit Upturn 36" x 36"	1-1/2" x 1-1/4"	72"	Routs 8" O.C. beginning at bend	47.5	32.0	20.5	13.7	12	72
	SSLD2424	L Soffit Downturn 24" x 24"	1-1/2" x 1-1/4"	48"	Routs 8" O.C. beginning at bend	47.5	32.0	20.5	13.7	12	48
	 SSLU1836	L Soffit Upturn 18" x 36"	1-1/2" x 1-1/4"	54"	Routs 8" O.C. beginning at bend	47.5	32.0	20.5	13.7	12	54
	 SSLU1872	L Soffit Upturn 18" x 72"	1-1/2" x 1-1/4"	90"	Routs 8" O.C. beginning at bend	47.5	32.0	20.5	13.7	12	90
	 SSU182418	U Soffit 18" x 24" x 18"	1-1/2" x 1-1/4"	58-1/2"	Routs 8" O.C. beginning at bend	47.5	32.0	20.5	13.7	12	58-1/2
	 SSU123612	U Soffit 12" x 36" x 12"	1-1/2" x 1-1/4"	58-1/2"	Routs 8" from center on width	47.5	32.0	20.5	13.7	12	58-1/2
	SSLU_ _ _ _	L Soffit Upturn	1-1/2" x 1-1/4"	24" - 144"	Up to 6 routs and 1 notch	47.5	32.0	20.5	13.7	12	48
	SSLD_ _ _ _	L Soffit Downturn	1-1/2" x 1-1/4"	12" - 144"	Up to 6 routs and 1 notch	47.5	32.0	20.5	13.7	12	48
	SSB_ _ _ _	Box Soffit	1-1/2" x 1-1/4"	12" - 144"	Up to 6 routs and 3 notches	47.5	32.0	20.5	13.7	12	48
	SSMS_ _ _ _	Multi-Step Soffit	1-1/2" x 1-1/4"	12" - 144"	Up to 6 routs and 6 notches	47.5	32.0	20.5	13.7	12	48

NOTE: All load test data based on flat installation per ASTM C635.

See SimpleSoffit Data Sheet for additional items.

FRAMEALL® Drywall Grid

Drywall Suspension System & Components

Submittal Information


AXIOM® TRIM FOR FRAMEALL DGS

VISUAL SELECTION

	Item No. ♦	Description
AXIOM® One-Piece Trim for Drywall	AX1PC2STR_ _	2-1/2" One-Piece Trim for Drywall – Straight
	AX1PC2CUR_ _	2-1/2" One-Piece Trim for Drywall – Curved
	AX1PC4STR_ _	4" One-Piece Trim for Drywall – Straight
	AX1PC4CUR_ _	4" One-Piece Trim for Drywall – Curved
	AX1PC6STR_ _	6" One-Piece Trim for Drywall – Straight
	AX1PC6CUR_ _	6" One-Piece Trim for Drywall – Curved

♦ Add the 2- or 3-digit color suffix to the item number when specifying or ordering (e.g., AX1PC2STR H Δ)
 † Multiple radii available in a single direction only.
 ★ Not available in architectural film finishes

	Item No. ♦	Description
AXIOM Two-Piece Bottom Trim for Drywall (used with AXIOM Classic)	AXBSTR_ _	Two-Piece Bottom Trim for Drywall – Straight
	AXBTCUR_ _	Two-Piece Bottom Trim for Drywall – Curved



See Axiom Trim for Drywall and AcoustiBuilt® Data Sheet for additional items

TRANSITION MOLDINGS

VISUAL SELECTION









	Item No.	Flange	Length	Reveal	PCS/CTN	LF/CTN	
Shadow Reveal Transition Molding	7901	9/16"	120"	3/8"	12	120	
	7902	15/16"	120"	3/8"	12	120	
	7911	9/16"	120"	3/8" × 1/4"	12	120	
	7912	15/16"	120"	3/8" × 1/4"	12	120	
	7903	9/16"	120"	1"	12	120	
Flush Transition Molding	7904 7904PF★	15/16"	120"	N/A	12	120	
	7905 7905PF★	9/16"	120"	N/A	12	120	

FRAMEALL® Drywall Grid

Drywall Suspension System & Components

Submittal Information

TRANSITION MOLDINGS (continued)

	Item No.	Flange	Length	Transition Height	Pcs/ Ctn	LF/ Ctn.	
F Vertical Transition Molding	7906	1/2"	120"	N/A	12	120	
	7913	9/16"	120"	N/A	12	120	
	7914	15/16"	120"	N/A	12	120	
	 7915	7/8"	120"	N/A	12	120	
Tegular Transition Molding	7907	9/16"	120"	5/16"	12	120	
	7908	15/16"	120"	5/16"	12	120	
Step Transition Molding	7909	15/16"	120"	1"	12	120	
	7910	9/16"	120"	1"	12	120	

* Protective film applied to face of wall molding flange for easier finishing.

See Transition Moldings Data Sheet for additional items.


FRAMEALL® Drywall Grid

Drywall Suspension System & Components


Submittal Information

FRAMEALL DRYWALL GRID DETAILS


HD8906

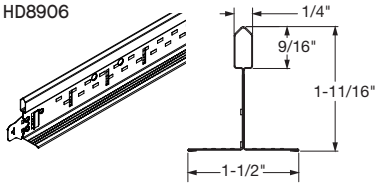

Cross Tee

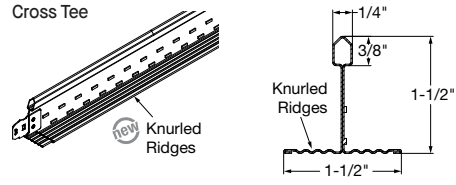


ShortSpan® Tee

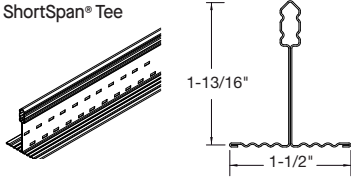


RC2

Radius clip for curved drywall grid applications




KAM

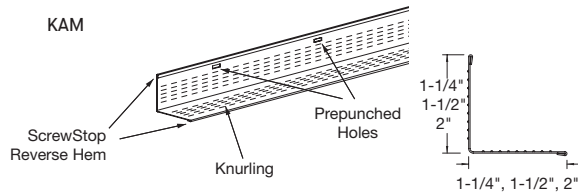


LAM12

12' Locking Angle Molding (Locking Tabs 8" O.C.)

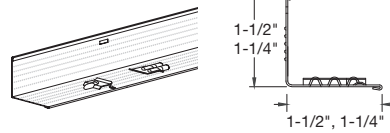


SimpleCurve

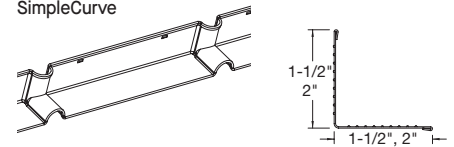


One-Piece Trim for Drywall

One-Piece Trim for Drywall: Integrated and pre-punched tapping flange for drywall attachment.

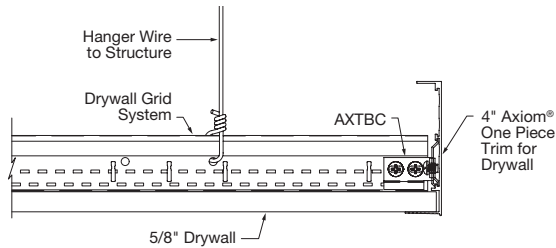

SIMPLESOFFIT® STANDARD SIZE/BEND OPTIONS




SSLU2424
L Soffit Upturn 24" × 24"



SSLU4824
L Soffit Upturn 48" × 24"



SSLU3636
L Soffit Upturn 36" × 36"



SSLD2424
L Soffit Downturn 24" × 24"



SSLU1836
L Soffit Upturn 18" × 36"



SSLU1872
L Soffit Upturn 18" × 72"



SSU123612
U Soffit Upturn 12" × 36" × 12"



SSU182418
U Soffit Upturn 18" × 24" × 18"