

Translucent INFUSIONS™

Wall Panels
smooth texture



Infusions™ Walls 24" × 96" in Refined Tangerine


Wall System available in translucent colors and patterns that can be hung individually or in a group.

KEY SELECTION ATTRIBUTES

- Coordinate with Armstrong® ceilings or other interior finishes including Infusions™ Partitions, Lay-in Panels, and Canopies, SoundScapes® Blades and Shapes, or Create!™ ceilings
- Standard products create a custom look
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Factory-drilled to accept Point Support hardware kit
- Aluminum Point Support Kit offers contemporary sleek visual
- Panels and installation hardware packaged in one complete kit

COLORS Due to printing limitations, shade may vary from actual product.

Patterns*



* Due to the unique nature of the woven fabric used in these products, color may vary from panel to panel.

Solids



Translucent INFUSIONS™

Wall Panels
smooth texture

RECYCLED
CONTENT

LEED V5

UP TO
40%

COMMON MATERIALS FRAMEWORK

Human Health

Climate Health

Ecosystem Health

Circular Economy

OCCUPANT EXPERIENCE

Acoustics

VISUAL SELECTION

	Item No. ♦	Dimensions (Inches)	PCS/CTN
INFUSIONS™ Walls	5824_ _ _	24 × 96 × 1/4" 	2

♦ When specifying or ordering, include the appropriate 3-letter color suffix (e.g., 5824 I C C.)

PERFORMANCE

CleanAssure™
Disinfectable Walls




ACCESSORIES

Item No.	Description	Color	PCS/CTN
5848	Infusions Wall Panel Hardware Kit	Aluminum	16 Point Supports

NOTE: Panel kit does not include hardware. Infusions Wall panel hardware kit must be ordered separately.

DETAIL

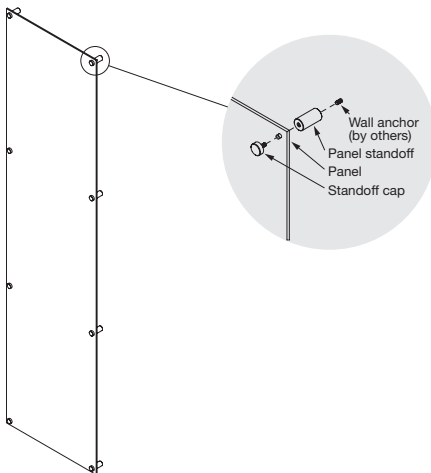

PHYSICAL DATA

Material
PETG

Surface Finish
Smooth

Fire Performance

Infusions panels have been tested according to NFPA 286 and are equivalent to Class A Interior Finish as defined by the International Building Code.

Contact TechLine at 1 877 276-7876 for specific U.S. and Canadian fire performance data.

Installation and Design Considerations

Do not allow panel edges to get wet.

Infusions panels are not approved for exterior application.

Color may vary from panel to panel on patterned products.

Wall anchor hardware is provided by others. A minimum gap of 1/4" is required between panels. Panels are pre-drilled for Point Supports.

Panels can be damaged by exposure to high temperatures. Panel temperature should not be permitted to exceed 100°F. There is potential for limited deflection of panels.

Cleaning and Disinfecting

Cleaning and CDC-recommended disinfecting options available on [armstrongceilings.com/cleaning](https://www.armstrongceilings.com/cleaning)

Warranty

Details at [armstrongceilings.com](https://www.armstrongceilings.com)

Weight; Pieces/Pack

Panel weight – 27 LBS
2 pieces/pack (Bulk packed)

TechLine / 1 877 276-7876
[armstrongceilings.com/infusions](https://www.armstrongceilings.com/infusions)
BPCS-5102-925

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC

Armstrong®
World Industries

PARTITIONS & WALLS