

LYRA® PB Direct Apply
with Plant-based Binder
smooth texture



SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED
CONTENT

UP TO
71%

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓




Lyra® PB Direct-Apply wall panels

Lyra® PB Direct-Apply wall panels provide sustainable and acoustical options for a wide variety of applications and install directly to wall surfaces using ceiling adhesive.

KEY SELECTION ATTRIBUTES

- Lyra® PB Direct-Apply panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- High sound absorption NRC 0.95
- Easy installation to walls with recommended adhesive to:
 - Corrugated metal ceiling surfaces
 - Drywall, concrete, and plaster
- Wall installation – 6' from the ground or higher
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning)
- Washable, Impact-resistant, Scratch-resistant, Soil-resistant
- All items are manufactured with a plant-based binder
- Made-to-order sizes and colors available

COLORS Due to printing limitations, shade may vary from actual product.

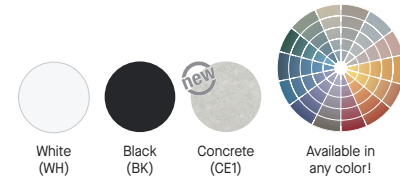

VISUAL SELECTION

	Item No.	Dimensions Nominal W x L x H (Inches)
LYRA® PB Direct Apply (with Plant-based Binder)	8400PB	24 x 24 x 1" □
	8400PBBK	
	8400PBCE1	
Square (all sides)	8401PB	24 x 48 x 1" □
	8401PBBK	
	8401PBCE1	
	8402PB	24 x 60 x 1" □
	8402PBBK	
	8402PBCE1	
	8403PB	24 x 72 x 1" □
	8403PBBK	
	8403PBCE1	
	8404PB	48 x 48 x 1" □
	8404PBBK	
	8404PBCE1	

1" Thick – Direct Apply		
Made-to-Order Sizes**	Width	Length
1 Ctn Min FAST SIZE 3 WEEKS order to ship	12" – 24"	24" – 96"
	24-1/2" – 48"	24" – 71-1/2"

PERFORMANCE

Dots represent high level of performance.

Fire Rating	(White only)	Bio-Block	Humi-Guard+	Anti-Mold/Mildew	Sag Resist	Certified Low VOC Emissions	CleanAssure™ Disinfectable Walls	DURABILITY					10-Yr Warranty
	Light Reflect						Fog	Wash*	Impact	Scratch	Soil		
Class 0.88 A	•	•	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•	•	•
Class 0.88 A	•	•	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•	•	•
Class 0.88 A	•	•	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•	•	•
Class 0.88 A	•	•	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•	•	•
Class 0.88 A	•	•	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•	•	•

ACOUSTICAL INFORMATION

Panel Thickness	NRC	Mounting Method
1"	0.95	D-40
1"	0.80	A

NOTE: Concrete (CE1) A-Mount
Acoustical Performance: 0.70

* Wash attributes do not apply to Black or Concrete Look panel

** Size limitations are based on sizes included in panel warranty using gluing methods listed in installation instructions. Refer to BPLA-299100 installation instructions for more details.

PHYSICAL DATA: (Refer to Lyra PB product page in the Direct-to-Structure section)

TechLine / 1 877 276-7876
armstrongceilings.com/lyradirectapply
BPCS-6476-925

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC

Armstrong®
World Industries

PARTITIONS & WALLS