
METALWORKS™

Accent & Acoustical Canopies smooth texture

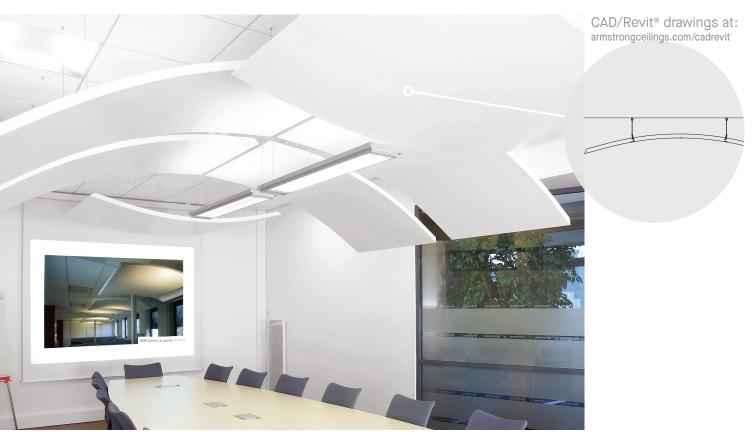

MetalWorks™ Canopies in White

Durable and sleek metal canopies define and accentuate spaces.

KEY SELECTION ATTRIBUTES

- · Great aesthetic from above and below
- · Easy installation
- · Adjustable to special heights and angles
- · Three panel types flat, hill, valley
- CleanAssure[™] family of products includes disinfectable panels, suspension systems, and trim
- · Durable easy to clean and maintain
- · Excellent acoustical performance

COLORS Due to printing limitations, shade may vary from actual product.



Silver Grey (SG)





Available

PERFORATION OPTIONS (1:2 scale shown)







M1 (Unperforated)

M2 (Microperforated)

M3 (Extra Microperforated)

METALWORKS™

Accent & Acoustical Canopies smooth texture

Item No.◆

METALWORKS™ 5375H6____

Canopies

Shape

Hill

5375V6____ Valley

5375F6____ Flat

RECYCLED CONTENT UP TO

OCCUPANT EXPERIENCE

25%

COMMON MATERIALS FRAMEWORK **Declare Label**

3rd Party CDPH

ACCESSORIES

EPD Climate Health EPD Ecosystem Health

Circular Economy

0 0

VISUAL SELECTION

Dots represent high DEDECORATANCE

PERF	JRMA	NCE I	evei o	r perror	mance) .	
	(White only)	CleanAssure™ Disinfectable Panels			DURABILITY		
Fire Rating	Light Reflect	Fog & Spray	Wipe	Wash	Scrub	Impact	Soil
		E	®			(g/^,	
Class A	0.90	٠	•	٠	٠	•	٠

Item No. Description 8149I 8CR

The MetalWorks™ Canonies Deck Hanging Kit suspends canopies from the deck, allowing adjustment of height.

Kit Contents:

- (2) Gripper Structure Anchors(2) Gripper Structure Caps
- (2) 8' Aircraft Cables
- (2) Bottom End Cable Adjusters
- Two kits are required to hang each MetalWorks Canopy (ordered separately from canopy).

Dimensions (Inches)

74-1/2 × 46-1/2 × 1-1/2"

74-1/2 × 46-1/2 × 1-1/2"

74-1/2 × 46-1/2 × 1-1/2"

Class 0.90

Α

Class 0.90 Α

PHYSICAL DATA

Material

Galvanized Steel

Panel Arc

Hill or Valley - 7-7/8"

Surface Finish and Edge Detail

Factory-applied post-production powder-coated finish; Light reflectance 0.75 – White unperforated only

Curved (hill/valley) - edge detail width; 45° angle, edge detail length: 90° angle

Fire Performance

Class A: Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

MetalWorks™ Canopies, as with other architectural features located in the ceiling plane, may obstruct or skew the existing or planned fire sprinkler water distribution pattern, or possibly delay the activation of the fire sprinkler or fire detection system. Designers and installers are advised to consult a fire protection engineer, NFPA 13, and their local codes for guidance on the proper installation techniques where fire detection or suppression systems are present.

ASTM E1264 Classification Fire Class – Class A

Acoustical Performance

M2 Perforated with fiberglass infill - sound absorption 1.25

M3 Extra Microperforated with fiberglass infill – sound absorption 1.15

Design Considerations

MetalWorks Canopies are not approved for exterior application. The MetalWorks Canopies cable-hanging system must not hang from any commercial ceiling suspension system. The canopy must not be used to support any other material.

Installation Consideration

MetalWorks Canopies require two people to handle and install a panel safely. See installation instructions on website for details.

Seismic Restraint

Refer to ASCE 7-10, Section 13.5 Architectural Components, for seismic requirements. Section 13.5, item 2 refers to 13.2.3 Consequential Damage.

Cleaning and Disinfecting

Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

Suspension System

Deck Hanging Kit (Item 8149L8CR) is ordered separately.

Warranty

Details at armstrongceilings.com/warranty

Hill or Valley 62.4 lbs; one canopy per carton Flat 52 lbs; one canopy per carton



[♦] When specifying or ordering, include the appropriate 2-digit perforation code and 2-digit color suffix (e.g. 5375H6 M 2 W H) For details, contact TechLine at 1 877 276-7876.