

METALWORKS™ Fastrack – Custom



METALWORKS Fastrack

Fastrack metal ceilings combine function with aesthetics. Installed in an exposed linear grid system, panels provide maximum lighting design flexibility utilizing a continuous linear ceiling layout. For added convenience, partition walls can be positioned and displaced under the linear grid trim strips.

Armstrong METALWORKS ceiling systems offer a broad range of manufacturing capabilities for custom metal ceiling options. This collaborative design offering can include custom visuals, dimensions, performance levels and integration options including the types of systems shown here. Call 877 276 7876, and select options 1-1-4 to speak to an Armstrong Architectural Specialties representative about your custom metal ceiling needs.

Color Selection

Due to printing limitations, shade may vary from actual product.



White (WH)



Silver Grey
(SG)



Gun Metal
Grey (MY)

Standard METALWORKS colors Global White, Silver Grey and Gun Metal Grey, as well as RAL colors, are available on METALWORKS custom systems. Contact Armstrong Architectural Specialties for custom color matching requests.

Armstrong®
CEILING SOLUTIONS

Custom Product Attributes

- Dimensional flexibility
- Easy to install exposed linear grid system
- Modular system for easy lighting design
- Full range of perforation patterns available
- Fully accessible panels; minimal grid obstructions
- Swing down panel options available
- Curved options available
- World-class design support available

Applications


- Office buildings
- Flexible room partitioning
- Large open plan ceiling areas
- Corridors
- High access areas

Relative Installed Cost


\$	\$\$	\$\$\$	\$\$\$\$
----	------	--------	----------

Perforation Options for Custom Systems (partial list)


To view our full range of perforations available for custom METALWORKS systems, visit our Web site at www.armstrong.com/metalworks




Pattern Rg 0701




Pattern Rg 2516




Pattern Rg 3027



Pattern Rd 2508



Pattern Qg 4025



Pattern Rd 2535

Suspension

By visible linear suspension elements.

Suspension Components

BPM330.001 U-Profile
BPM300.119 U-Profile Splice
BPM300.120 Plug-in Clip
C-Profile (4", 6", 8" or 12" width)
C-Profile Splice
C-Profile Hanger
BPM300.140 Wall Anchor
F Wall Angle

Lighting Layout Options


Example 1

Exposed side of ceiling with lighting modules integrated in rectangular panels.




Example 2

Here, custom end sheets extend the separate lighting modules to the length of the ceiling.



Example 3

Directly integrated standard lighting modules. The width of the trim strips is enlarged; ceiling panels are adjusted to the length of the lighting.



Seismic Installations

METALWORKS custom systems have been engineered and tested for applications in seismic zones. Contact Armstrong Architectural Specialties for specific test information details and installation instructions.

Acoustical Options

Perforated custom panels are usually supplied with factory installed, black, sound absorbent acoustical fleece. Fiberglass infill panels are also available.

Physical Data

Panel Dimensions

Typical panel dimensions range from 9" to 24" width and up to 96" length. Our Armstrong Architectural Specialties project management team is available to assist in project design.

C-profile Dimensions

Width: Standard 4"; other widths up to 12" available (100mm – 300mm)
Length: up to 157"

Material

Standard material is electrogalvanized steel. Aluminum is also available. Consult Armstrong's Architectural Specialties Group.

Finishes

Factory-applied powder-coated (post-coated). Color and surface quality is identical on both visible suspension system elements and infill panels.


Fire Performance

Class A per IBC

Recycled Content

25%

Note: Gasketed joints between panels. Fastrack ceilings may be specified with a gasketed (3mm) or tight-butt joint between the long plank edges. The short plank edges (adjacent to the C-profiles) require the use of a gasketed edge.

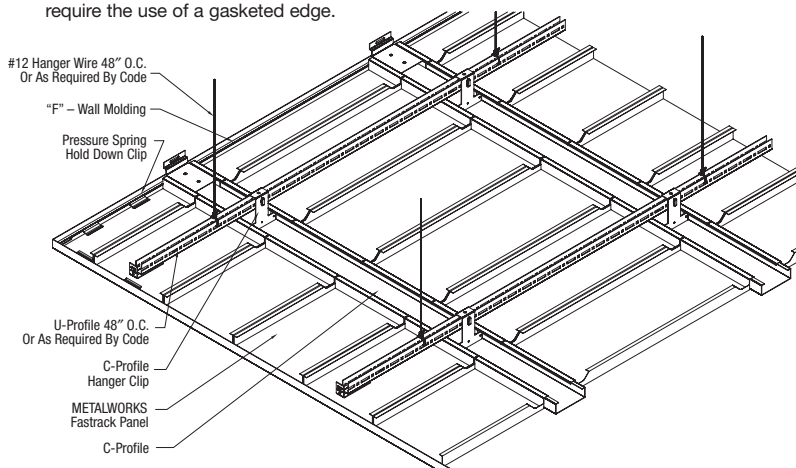

Due to nonstandard dimensions, finishes and performance features for this METALWORKS system, please call 1 877 276 7876 and select options 1-1-4 to work with Architectural Specialties project management team or visit our Web site. Features and specifications are subject to change without notice.