


SOUNDSCAPES® Blades

Linear Acoustical Wall Panels – Wood Looks
smooth texture



FAST134
Select Items Ship Fast
armstrongceilings.com/fast134

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



SoundScapes Blades wood-look wall panels in Brown Sugar Walnut (WBS)

Linear acoustical wood-look wall panels help reduce reverberation time in your space.

KEY SELECTION ATTRIBUTES

- Now available in 7 standard wood-look visuals
- Direct attach to wall using Axiom® Wall Molding
- Sound absorption up to 0.85 NRC dependent on blade spacing
- Black embedded hanging clips
- Custom panel options available
- Mold- and mildew-resistant surface
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less. See up-to-date lead times at armstrongceilings.com/fast134
- Seismic-tested
- ASTM E84 Class A Fire Performance
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

FINISHES

new Wood-look Visuals



For premium and custom capabilities, contact ASQuote@armstrongceilings.com



*Nature-Inspired
Colors Available!*

SOUNDSCAPES® Blades

Linear Acoustical Wall Panels – Wood Looks

smooth texture

RECYCLED
CONTENT

UP TO
53%

LEED V5

COMMON MATERIALS FRAMEWORK

Human Health

Climate Health

Ecosystem Health

Circular Economy

OCCUPANT EXPERIENCE

Acoustics

VISUAL SELECTION Shown in elevation view


Item No. ♦	Description	Dimensions (D × L × Thickness)
SOUNDSCAPES® 8250F04RH05 _ _ _	Rectangular Vertical Panel	5 × 46 × 1-3/4"
8250F04RH06 _ _ _	Rectangular Vertical Panel	5 × 94 × 1-3/4"

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
♦ Add 3-letter finish suffix to end of item number (e.g., 8250F04RH05 W H Q = Honey Oak)

INSTALLATION OPTIONS

Item No. ♦	Description	Pieces/ Carton
Direct-Attach with Axiom® Wall Molding	AXM34STR3 _ _	10' Straight Wall Molding (360° Paint Recommended; order by the piece)

♦ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 B L)

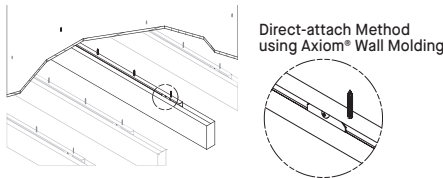

PHYSICAL DATA

Material

1-3/4" thick fiberglass with acoustically transparent membrane on face and sides.

Surface Finish

SoundScapes® Blades panels are made with a smooth, unfinished wood-grain texture. Top of panel is unfinished with black embedded hanging clips.

Fire Performance

SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

Anti-Mold/Mildew

Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations

SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart.

Special care in installation and handling must be taken with wood-look panels to avoid surface damage. Be advised thickness on wood-look blades is 1/4" less than painted blades.

5" SoundScapes Blades are not recommended for use in high-traffic or high-impact areas. For best results, install above 7" from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

All wood-look blades are produced with wood grain parallel to the panel length. Wood-look visuals are designed to mimic slight color variations as seen in real wood.

Seismic Restraint

SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

Recommended Suspension Systems

SoundScapes Blades panels are pre-assembled with metal hanging clips in the top of the panels. See installation instructions BPLA-297844 for installation details.

FAST134 Program Considerations

Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

PERFORMANCE Dots represent high level of performance.

	Fire Rating	Bio-Block® Anti-Mold/Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels
Class A	•	•	•	•
Class A	•	•	•	•

ACOUSTIC INFORMATION

Panel Depth	6" O.C.	12" O.C.	18" O.C.	24" O.C.
5"	0.85	0.60	0.45	0.35

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty

Details at armstrongceilings.com/warranty

Panel Weight

8250F04RH05 – 2.9 LBS/PC

8250F04RH06 – 5.8 LBS/PC

Panels/Carton

4

Minimum Order Quantity

1 carton