

# TECTUM®

Acoustical Clouds  
coarse texture



CAD/Revit® drawings at:  
[armstrongceilings.com/cadrevit](http://armstrongceilings.com/cadrevit)


Tectum® Clouds in White and custom color

Tectum® Clouds deliver design flexibility and acoustical performance in a floating system.

## KEY SELECTION ATTRIBUTES

- Floating cloud system in multiple square and rectangle sizes and square or radius edges; custom sizes available
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (standard colors only)
- Sound absorption up to 0.50 Sabins/SF
- Panel Sizes in 1-1/2" or 2" panel thickness; widths: 23-3/4" to 47-3/4"; lengths: up to 96"
- Mold- and mildew-resistant surface
- Can be field painted up to 6 times without impacting acoustic or fire performance
- Easy to install with sleek, adjustable aircraft cable hanging kit
- Seismically tested
- USDA-Certified Biobased Product 98% (preferred for government projects)
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

**COLORS** Due to printing limitations, shade may vary from actual product.

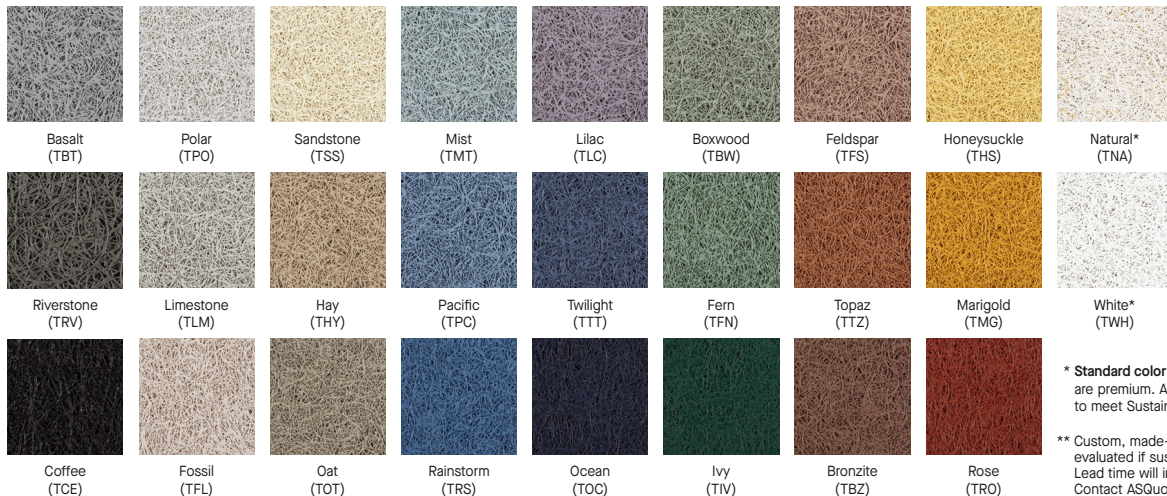

\* Standard color options; Nature-inspired colors are premium. All colors shown are pre-qualified to meet Sustain® portfolio requirements.

\*\* Custom, made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase. Contact [ASQuote@armstrongceilings.com](mailto:ASQuote@armstrongceilings.com)

# TECTUM®

## Acoustical Clouds

### coarse texture

USDA  
CERTIFIED  
BIOBASED  
PRODUCT  
PRODUCT 98%



# LEED V5

COMMON MATERIALS FRAMEWORK	Climate Health	EPD
Human Health	Ecosystem Health	EPD
		FSC®
3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE	Acoustics	✓

## VISUAL SELECTION

	Panel Thickness	Dimensions W x L x D (Inches)	Maximum Available Length	Colors
TECTUM® Clouds	1-1/2"	24 x 24 x 1-1/2"	96"	TNA, TWH, Custom
	1-1/2"	48 x 48 x 1-1/2"	96"	TNA, TWH, Custom
	2"	24 x 24 x 2"	96"	TNA, TWH, Custom
	2"	48 x 48 x 2"	96"	TNA, TWH, Custom

◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural (unpainted) TWH = White  
For special sizes, and colors, call TechLine at 1 877 276-7876.

## PERFORMANCE SELECTION

Dots represent high level of performance.

Fire Rating	Light Reflect	Anti-Mold/Mildew	Sag Resist	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	Fog	Impact	Scratch	30-Yr Warranty
(White only)	Bio-Block	Humi-Guard+							
Class A	Up to 0.75	*	*	N/A	*	*	*	*	*
Class A	Up to 0.75	*	*	N/A	*	*	*	*	*
Class A	Up to 0.75	*	*	N/A	*	*	*	*	*
Class A	Up to 0.75	*	*	N/A	*	*	*	*	*


## ACOUSTICAL INFORMATION

Panel Thickness	Sound Absorption
1-1/2"	0.50
2"	N/A


## CUSTOM SHAPES AVAILABLE

Create your own shapes!  
For assistance, call TechLine at 877 276-7876.

## DETAILS

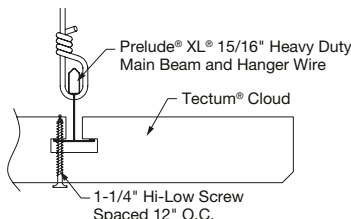

## EDGE DETAILS



## PHYSICAL DATA

**Material**  
FSC® Certified (FSC® C007626)  
Cementitious Wood Fiber; FSC® certified. For more information about FSC® certified fire-retardant products, or to view our FSC® certification letter, contact TechLine at 877 276-7876.

**Surface Finish**  
Factory-applied latex paint with Silicate surface coating for abuse resistance. Natural is unpainted.

**Fire Performance**  
Class A: Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

**CAN/ULC S102 surface burning characteristics.** Flame Spread Index of 25 or less and Smoke Developed Index of 50 or less.

**Humidity/Sag Resistance**  
HumiGuard® Plus performance panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

**Anti-Mold/Mildew**  
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

**Installation Considerations**  
Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum® panels. Refer to installation instructions for complete details and cutting recommendations.

**Primary (Embodied) Energy**  
See all LCA information on our EPDs.

**Application Considerations**  
Color variation among panels is common due to the natural characteristics of the wood.

Wood fibers may appear orange on Natural colored panels due to the characteristics of the wood.

Low angle lighting exaggerates variation inherent to the manufacturing process and is not recommended for Tectum installations.

**Design Considerations**  
Tectum® Clouds are inherently directional due to manufacturing constraints. The finished visual on the front and back of the panel will not match exactly. 360 degree factory or field painting is recommended.

**Design & Pre-Construction Service**  
For complimentary design and pre-construction assistance, contact ProjectWorks® or visit [armstrongceilings.com/projectworks](http://armstrongceilings.com/projectworks)

**Cleaning and Disinfecting**  
Cleaning and CDC-approved disinfecting options available on [armstrongceilings.com/cleaning](http://armstrongceilings.com/cleaning)

**Warranty**  
30-Year Warranty. Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)

**Weight**  
1-1/2" – 2.55 lbs/SF  
2" – 3.50 lbs/SF