
# TECTUM® DesignArt™ – Shapes

Direct-Attach Wall Panels coarse texture





CAD/Revit® drawings at: armstrongceilings.com/cadrevit



Visit our online pattern gallery at: armstrongceilings.com/patterngallery

Mix and match Shapes and Lines for a truly unique visual!



armstrongceilings.com/designart

Tectum DesignArt - Shapes Direct-Attach wall panels in pattern TDSH-0006 in standard colors

Transform interior spaces by combining texture, shapes, patterns, and colors with sustainable, acoustical Tectum® DesignArt™ – Shapes Direct-Attach wall panels.

# KEY SELECTION ATTRIBUTES

- 30 standard Shapes direct-attach wall panels available in 24 new standard colors, and Natural
- Products in the Tectum DesignArt portfolio are made to work together
- Available for ceiling and wall applications
- Tectum DesignArt Shapes panels have UL® Certified acoustics with testing and reporting that align with industry-wide best practices
- Great retrofit solution for noise reduction
- Excellent sound absorption NRC up to 0.85 (1" panel, C-40 Mounting)
- CleanAssure<sup>™</sup> family of products includes disinfectable panels, suspension systems, and trim (standard colors only)



- · All edges are beveled and painted
- · Touch up paint for standard colors available

Available\*

Rose (TRO)

(TBZ)

- Panels can be mechanically fastened to a wide variety of surfaces including masonry, drywall, drywall grid system, wood, and more
- · USDA Biobased content: 98%
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

# COLORS Due to printing limitations, shade may vary from actual product.

Oat (TOT)



Ocean (TOC)

(TRS)

Ivy (TIV)

# DETAIL



Tectum DesignArt – Shapes Direct-Attach panel in Polar. Edges are beveled and painted

Colors that are pre-qualified to meet Sustain portfolio requirements are available upon request. Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase.



Fossil (TFL)

Coffee (TCE)

# TECTUM® DesignArt™ -Shapes

Item No.

See below

Direct-Attach Wall Panels coarse texture

VISUAL SELECTION

**TECTUM®** 

DesignArt™ - Shapes Beveled Edges



The mark of ponsible forest

SUSTAIN<sup>®</sup> High Performance ainable Ceiling Systems


EPD Climate Health EPD Ecosystem Health FSC® 3rd Party CDPH Circular Economy OCCUPANT EXPERIENCE **②** 

USDA CERTIFIED BIOBASED PRODUCT

Dimensions W × L × H (Inches)

See below

Declare.




45° SHAPES

# ACOUSTICAL INFORMATION

UL Classified Acoustics		
Panel Thickness	NRC	Mounting Method
1"	0.40	А
	0.45	D-20
	0.80	C-20
	0.85	C-40

30° SHAPES Isosceles Triangles Nominal Dimensions	Item No.	Description
24"	5420T11T10	Isosceles Triangle
48"	5420T12T10	Isosceles Triangle

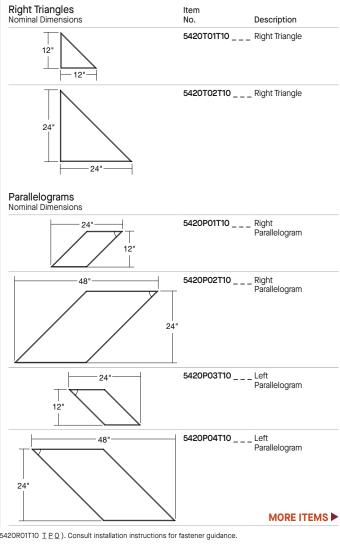


<sup>♦</sup> When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 5420R01T10 TPO). Consult installation instructions for fastener guidance.

# TECTUM® DesignArt™ - Shapes


Direct-Attach Wall Panels coarse texture

60° SHAPES Right Triangles Nominal Dimensions	Item No.◆	Description
12"	5420T05T10	Right Triangle – Right
24"	5420T06T10	Right Triangle – Right
12"	5420T07T10	Right Triangle – Left
24"	5420T08T10	Right Triangle – Left


# Parallelograms Nominal Dimensions



# 60° SHAPES Hexagons Nominal Dimensions 14" 5420H01T10 \_ \_ Hexagon 12" 5420H02T10 \_ \_ Hexagon Trapezoids



# Equilateral Triangles Nominal Dimensions




♦ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 5420R01T10 <u>IPO</u>). Consult installation instructions for fastener guidance.

**MORE ITEMS** ▶



# TECTUM® DesignArt™ - Shapes

Direct-Attach Wall Panels coarse texture

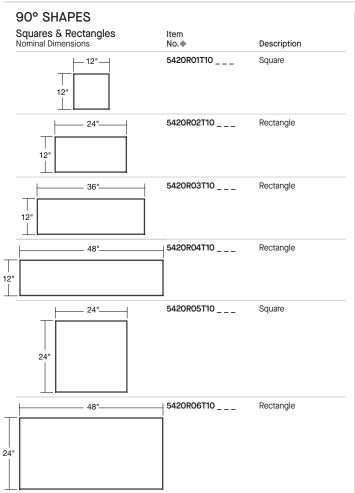


Circles Nominal Dimensions	ltem No.◆	Description
12"	5420C01T10	Circle
24"	5420C02T10	Circle
6"	5420C03T10	Semicircle
12"	5420C04T10	Semicircle



<sup>♦</sup> When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 5420R01T10 ፲ P O). Consult installation instructions for fastener guidance.

PARTITIONS & WALLS




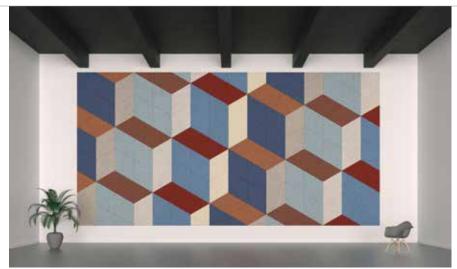


Tectum® DesignArt™ - Shapes, pattern TDSH-0006



Tectum DesignArt - Shapes, pattern TDSH-0001




Tectum DesignArt - Shapes, pattern TDSH-0009




Tectum DesignArt – Lines and Tectum DesignArt – Shapes, pattern TDSL-0001




Tectum DesignArt - Shapes, pattern TDSH-0004




Tectum DesignArt - Shapes, pattern TDSH-0011



Tectum DesignArt – Lines and Tectum DesignArt – Shapes, pattern TDSL-0002





Tectum DesignArt - Shapes, pattern TDSH-0006

Visit our online pattern gallery at armstrongceilings.com/patterngallery Use our recommended colors, or choose from 24 standard colors, in addition to Natural to create your own one-of-a-kind pattern!



# TECTUM® DesignArt™ - Shapes


# Direct-Attach Wall Panels coarse texture

# **ACCESSORIES**

Item No. ◆	Description	Quantity
5456GAL1	Touch up paint	1 gallon
8187L16TWH†	#6 × 1-5/8" Painted Head – Sharp point Screws	1000/ctn
8188L16TWH†	#6 × 1-5/8" Painted Head – Drill point Screws	1000/ctn
8189L22TWH	2-1/4" Painted Head - CMU Screws	500/ctn


When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 5456GAL1 TPO). Consult installation instructions for fastener guidance. Touch up paint is available to paint screw heads in field if desired or specified

# FURRING STRIP LAYOUT

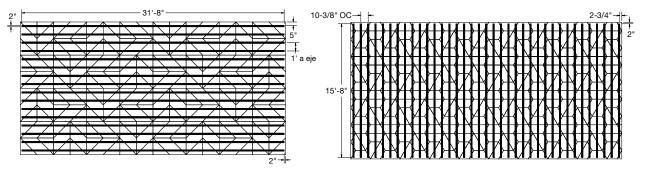

Furring strip spacing will vary depending on the scale of the shapes. Furring strip layouts are included on the Bill of Materials in our online pattern gallery at armstrongceilings.com/patterngallery.

# ACOUSTICAL MOUNTING METHODS



Tectum Direct-Attach Panel 1X Furring Strips -24" O.C. Laid on 3/4" Furring Strips With 1", 3 lb. Or Equal Density Fiberglass Mounting C-40 Tectum Direct-Attach Panel 2X Furring Strips -24" O.C. Laid on 1-1/2" Furring Strips With 2-1/2' Batt Insulation

Patterns can be installed with adjacent panel edges touching, or with negative space between panels where the walls substrate is visible. Furring installation enhances acoustics, but is not recommended for discontinuous patterns, such as those with a circle shape.

# PHYSICAL DATA

FSC® certified (FSC® C007626) Cementitious Wood Fiber; FSC® certified. For more information about FSC certified fireretardant products, or to view our FSC-certification letter, contact TechLine at 1 877 276-7876.

# Surface Finish

Factory-applied latex paint on abuse-resistant silicate surface coating. Natural finish is unpainted but, after coating is applied, panels may appear light in color.

Panels are painted on the edge, however due to fibrous texture of panels, certain angles and lighting conditions will make edge appear less or more painted.

Can be field painted up to 6 times without impacting acoustic or fire performance. See installation instructions for details on paint and application method.

Class A. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less and Smoke Developed Index of 50 or less (painted, face only).

# VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version

1.2, 2017. This standard is the guideline for low emissions in LEED\*, WELL Building Standard\*, CalGreen Title 24, ANSI/ ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol

TechLine / 1877 276-7876

armstrongceilings.com/designart

BPCS-6638-1025

Humidity/Sag Resistance HumiGuard\* Plus performance panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

# Anti-Mold/Mildew

Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

# Installation Considerations

Panels must be mechanically attached to approved substrate per installation instructions.

Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum panels. Refer to installation instructions for complete details and cutting recommendations.

# Primary (Embodied) Energy

See all LCA information on our EPDs

# **Application Considerations**

Low angle lighting exaggerates variation inherent to the manufacturing process and is not recommended for Tectum installations.

# **Design Considerations**

Color variation among panels is common due to the natural characteristics of the wood.

Wood fibers may appear orange on natural-colored panels due to the characteristics of the wood.

Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dyelotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

# Seismic Restraint

Tectum Direct-Attach wall panels are approved for application in all seismic areas when installed per the seismic guidelines in the Armstrong Ceiling and Wall Installation Instructions.

# Design & Pre-Construction Service

For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrongceilings.com/projectworks

Cleaning and Disinfecting
Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning

Warranty 30-Year Warranty. Details at armstrongceilings.com/warranty

# Weights and Sold By 1" - 1.65 lbs/SF

Panels sold by the piece. Other accessory elements quantities noted above.

LEED® is a registered trademark of the U.S. Green Building Council: Declare® and Living Building Challenge (LBC) are registered trademarks of the International Living Future Institute\*; WELL\* and WELL Building Standard\* are trademarks of the International WELL Building Institute; FSC\* is a registered trademark of Forest Stewardship Council\*, A.C., license code FSC-C007626; Revit\* is a registered trademark of Autodesk, Inc.; UL is a registered trademark of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC



NOTE: Projects may require alternative screw lengths and types depending on site conditions. Please consult installation instructions for guidance.