

TECTUM® TECTUM High NRC

Tegular
coarse texture



CONTAIN CLEAN PROTECT



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



▲ Tectum Tegular 24" x 48" panels in White with Prelude® XL® 15/16" suspension system

armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

Tectum® Tegular and High NRC ceiling panels provide durable, sustainable, acoustical options for a wide variety of applications.

KEY SELECTION ATTRIBUTES


- new** • Tectum Tegular panels now have UL® Certified acoustics with acoustical testing and reporting that align with industry-wide best practices
- new** • Tectum Tegular High NRC panels have a proprietary, factory-applied acoustical backer, adding sound absorption that is certified by UL
- new** • CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (standard colors only)
- Tectum panels are part of the Sustain® portfolio and meet the most stringent industry sustainability standards today – 1" panels in White and Natural only
- Excellent sound absorption - NRC up to 0.85 (1" High NRC panel)
- Get Total Noise Control and design flexibility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics Performance

- Mold- and mildew-resistant surface
- Durable for heavy-use interiors
- Wide variety of color options available, including custom colors
- Short lead times
- Can be field painted up to six times without impacting acoustic or fire performance
- USDA Biobased content: 98%

TYPICAL APPLICATIONS

- Gymnasiums
- Auditoriums
- Multi-purpose Spaces
- Corridors
- Education Spaces


COLORS Due to printing limitations, shade may vary from actual product.



* For Tectum Tegular only. Made-to-order, custom color panels, and any panels greater than 1" thick are not included in Sustain® portfolio.

LINE DESIGN CAPABILITIES

Available through special order.

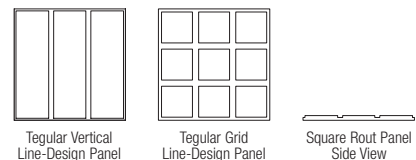

DETAILS



1. Tectum Tegular
2. Tectum Tegular with Prelude® 15/16" suspension system
3. Tectum Tegular High NRC proprietary acoustical backer

Note: Panel edges are unfinished. Painted panel edges available through special order. Custom color panel edges are fully painted.

TECTUM® TECTUM High NRC

Tegular
coarse texture



For LEED contribution visit
armstrongceilings.com/greenie



VISUAL SELECTION

armstrongceilings.com/catdwgs	Susp. Dwg.	Item No. ♦	Dimensions Nominal W x L x H (Inches)
TECTUM® Tegular (FSC® Certified)		8 8186T10___	24 x 24 x 1" □
		8185T10___	24 x 48 x 1" □
		Other Size Panels	1", 1-1/2", or 2" thickness
TECTUM® High NRC Tegular (FSC-certified)		8 5339W2L02T10___	24 x 24 x 1" □
		5339W2L04T10___	24 x 48 x 1" □

♦ When specifying or ordering, include the appropriate 3-digit color suffix
TNA = Natural, TWH = White (e.g. 8185T10 I W H)
For special sizes, and colors, call TechLine at 1 877 276-7876.

PERFORMANCE

Dots represent high level of performance.

Fire Rating	Light Reflect	Anti-Mold/Mildew	Sag Resist	Certified Low VOC Emissions	Fog	Impact	Scratch	30-Yr Warranty
Class Up to A	Up to 0.75	•	•	•	•	•	•	•
Class Up to A	0.75	•	•	•	•	•	•	•
Class Up to A	0.75	•	•	N/A	•	•	•	•
Class Up to A	0.75	•	•	•	•	•	•	•
Class Up to A	0.75	•	•	•	•	•	•	•

ACOUSTICAL INFORMATION


Item No. ♦	Infill Panel Item No.	NRC	CAC	Total Acoustics ¹
8186T10___	N/A	0.40	N/A	N/A
8185T10___	N/A	0.40	N/A	N/A
5339W2L02T10___	N/A	0.85	N/A	N/A
5339W2L04T10___	N/A	0.85	N/A	N/A
8186T10___	1713	0.90	35	BEST
8185T10___	1713	0.90	35	BEST

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
GOOD (NRC 0.60-0.65; CAC 35+)
BETTER (NRC 0.70-0.75; CAC 35+)
BEST (NRC 0.80+; CAC 35+)

ACOUSTICAL INFILL PANELS

Item No.	Description	Dimensions	Color	Pcs/Ctn
1713	School Zone® Fine Fissured Lay-in Acoustical Panel	24 x 24 x 3/4"	White	12

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Cementitious Wood Fiber; FSC-certified. For more information about FSC-certified fire-retardant products, or to view our FSC-certification letter, contact TechLine at 1 877 276 7876.

Tectum High NRC panels have an acoustical fleece.

Surface Finish
Factory-applied latex paint with silicate surface coating for abuse resistance. Natural is unpainted.

Fire Performance
Class A per IBC. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less and Smoke Developed Index of 50 or less (painted, face only).

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Humidity/Sag Resistance
HumiGuard® Plus panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

Installation Considerations
Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum panels. Refer to installation instructions for complete details and cutting recommendations.

Primary (Embodied) Energy
See all LCA information on our EPDs.

Application Considerations
Color variation among panels is common due to the natural characteristics of the wood on White and Natural panels.

Wood fibers may appear orange on natural-colored panels due to the characteristics of the wood.

Specification Consideration
FSC-certified panels available upon request. Attention: For FSC-certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint
Tectum Tegular panels are approved for application in all seismic areas when installed per Armstrong Ceilings Installation Instructions.

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

Warranty
30-Year Performance Guarantee & Warranty when installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
1" – 1.65 lbs/SF 1-1/2" – 2.53 lbs/SF
2" – 3.3 lbs/SF
8186T10 – 8 pcs/ctn
8185T10 – 4 pcs/ctn
5339W2L02T10 – 8 pcs/ctn
5339W2L04T10 – 4 pcs/ctn