

WOODWORKS®
 Accent & Acoustical Canopies
 smooth texture

*Custom looks
 with standard
 products*

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



▲ WoodWorks® Canopies 48" x 96" S-curve in Natural Variations™ Light Cherry finish

These aesthetically pleasing canopies in warm, natural wood veneers offer an acoustical performance when perforated.


KEY SELECTION ATTRIBUTES

- Choose from Hill, Valley, or S-curve dual radius canopies
- Adjustable to different heights and angles
- Perforated option available for better acoustics on Hill and Valley canopies
- Concealed mounting hardware for a clean look above and below
- Select products included in the FAST134 program – ready to ship in 4 weeks or less



VENEERS Due to printing limitations, shade may vary from actual product.


Natural Variations™ (Real Wood Veneers)

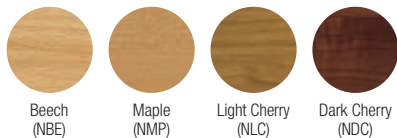

Bamboo (Veneer is Rapidly Renewable)



PERFORATION OPTIONS (Actual 1:6 scale shown)



NOTE: Rd 6006 perforation on Hill and Valley only. Black fleece adhered to the back of panels for improved acoustics.

WOODWORKS®

Accent & Acoustical Canopies
smooth texture

LEED® WELL™ | LBC

UP TO 92% RECYCLED CONTENT






energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/producer resp.
biobased materials
FSC® (for wood)
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

Calculate sustainability with GreenGenie™
armstrongceilings.com/greengenie

WITH INFILL PANEL

VISUAL SELECTION

PERFORMANCE


Item No. ♦	Description	Shape	Dimensions (Inches)	Fire Rating
WOODWORKS™ Canopies 5918_ _ _ _ _	Hill		72 x 36 x 3/4"	Class A
5919_ _ _ _ _	Valley		72 x 36 x 3/4"	Class A
5920_ _ _ _ _	Hill		96 x 48 x 3/4"	Class A
5921_ _ _ _ _	Valley		96 x 48 x 3/4"	Class A
5979_ _ _ _ _	S-curve		96 x 48 x 7/8"	Class A



FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134.

♦ When specifying or ordering, include the appropriate 5-digit perforation and color suffix (e.g. 5918W 1 N D C) with the item number.
NOTE: Suspension cables are shipped with canopies.

SUSPENSION COMPONENTS

Description	Color	Pieces/Carton
 WoodWorks® Canopy Hanging Kit *	Metal	1 kit

* Each Canopy Hanging Kit includes four hanging assemblies and is shipped with canopy. Use one kit per canopy.

PHYSICAL DATA

Material
Hill/Valley – fire-retardant particle board with face-cut veneers. S-curve – fire-retardant medium-density fiberboard with face-cut veneers.

Panel Arc
Hill or Valley – 12' radius
S-curve – 8' radius

Surface Finish
Clear or tinted semi-gloss coating

Fire Performance
Class A: ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.
CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

WoodWorks® Canopies, may obstruct or skew existing or planned fire sprinkler water distribution pattern, or delay the activation of fire sprinkler or fire detection system. Designers/Installers are advised to consult a fire protection engineer, NFPA 13, and local codes for proper installation.

ASTM E1264 Classification
Composite – Fire Class A

Acoustical Performance
0.52 Sound Absorption (Sabins/SF) with acoustical fleece.

Application Considerations
Variation among panels may occur due to natural characteristics.
WoodWorks panels MUST be climatized prior to installation. Relative humidity between 25-55% and temperatures between 50°F-86°F must be maintained.

Design Considerations
Canopies are not approved for exterior application. Cable hanging system must not hang from any commercial ceiling suspension system. The canopy must not support any other material.
Concealed hardware (painted black) may be visible.

Installation Considerations
WoodWorks® Canopies require two people to handle and install safely. See installation instructions at armstrongceilings.com/installation.

Seismic Restraint
Refer to ASCE 7-10, Section 13.5 Architectural Components, for seismic requirements. Section 13.5, item 2 refers to 13.2.3 Consequential Damage.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.
Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.
Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.
Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty
Details at armstrongceilings.com/warranty

Weight/SF
Hill or Valley – 2.5 lbs per SF (Bulk packaged)
S-curve – 3.5 lbs per SF (Bulk packaged)

