

WOODWORKS® Channeled Standard Wall Planks

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 100%




LEED® WELL™ LBC
UP TO 69% RECYCLED CONTENT

energy management construction waste mgmt regional materials design for flexibility EPD recyclable/extended producer resp. biobased materials FSC® (for wood) recycled content sourcing of raw materials material ingredient reporting low emitting materials lighting quality acoustics

LOCATION DEPENDENT

Calculate sustainability with GreenGenie™
armstrongceilings.com/greengenie

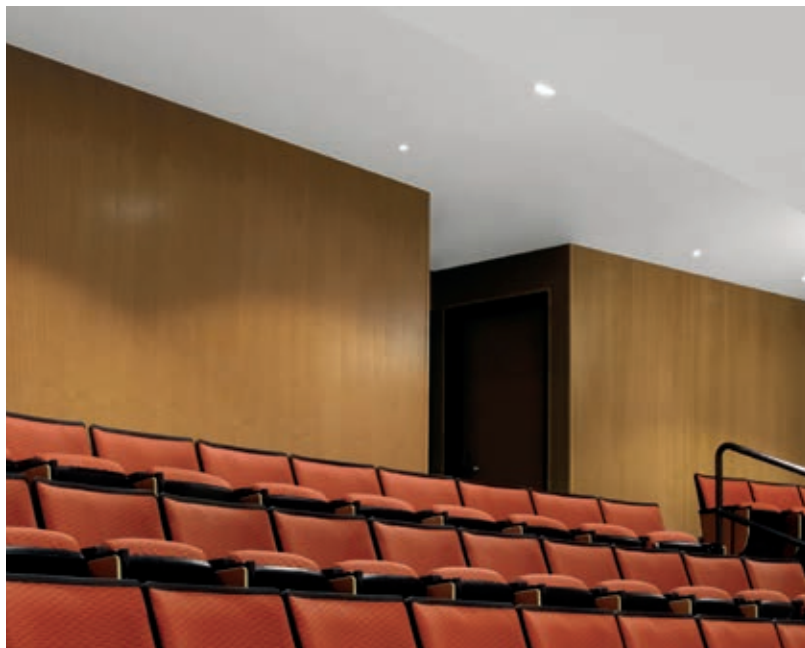

▲ WoodWorks® Channeled Wall System with W7 Perforation in Natural Variations™ Light Cherry with finished molding

Perforated wall panels with acoustical backing that improve sound quality and reduces reverberation time.


KEY SELECTION ATTRIBUTES

- Install in the ceiling, on the wall, or create 90° angled ceiling-to-wall transitions
- Two plank lengths available as standard products
- California Air Resources Board (CARB) compliant
- USDA-Certified Biobased Product 100%
- Shorter lead times and lower cost than custom millwork

VENEERS Due to printing limitations, shade may vary from actual product.


Natural Variations™

(Real Wood Veneers)



IMAGES™ FINISHES

(High Quality Printed Finishes)



VISUAL SELECTION

	Item No. ◆	Dimensions	
		Nominal W x L x H (Inches)	
WOODWORKS® Natural Variations™ FSC® certified Channeled Wall Plank Perforated (with acoustical fleece) Tongue and Groove 	5900WW7 ___	5.553 x 96 x 3/4"	
	5900WW8 ___	5.553 x 96 x 3/4"	
	5900WW9 ___**	5.553 x 96 x 3/4"	
	5901WW7 ___	5.553 x 120 x 3/4"	
	5901WW8 ___	5.553 x 120 x 3/4"	
	5901WW9 ___**	5.553 x 120 x 3/4"	
WOODWORKS® Images™ FSC® certified Channeled Wall Plank Perforated (with acoustical fleece) Tongue and Groove 	6688WW7 ___	5.553 x 96 x 0.688"	
	6688WW9 ___**	5.553 x 96 x 0.688"	
	6689WW7 ___	5.553 x 120 x 0.688"	
	6689WW9 ___**	5.553 x 120 x 0.688"	

PERFORMANCE

Dots represent high level of performance.

	Acoustics NRC 0.50	Fire Rating Class A
5900WW7 ___	0.50, 0.70 ^{††} •	Class A
5900WW8 ___	0.55, 0.90 [†] •	Class A
5900WW9 ___**	0.50, 0.75 [†] •	Class A
5901WW7 ___	0.50, 0.70 ^{††} •	Class A
5901WW8 ___	0.55, 0.90 [†] •	Class A
5901WW9 ___**	0.50, 0.75 [†] •	Class A
6688WW7 ___	0.50, 0.70 ^{††} •	Class A
6688WW9 ___**	0.50, 0.75 [†] •	Class A
6689WW7 ___	0.50, 0.70 ^{††} •	Class A
6689WW9 ___**	0.50, 0.75 [†] •	Class A

◆ When specifying or ordering, include the appropriate 3-letter color suffix (e.g., 5900WW7 **N M P**)

† NRC 0.75 or 0.90 when installed with bioacoustic infill 5479.

†† NRC 0.50 or 0.70 when installed with fiberglass infill 8200T10.

NOTE: For sizes available as special order, call TechLine at 1 877 276-7876.

** Size width for panels with W9 perforation is 5.393"

PERFORATION OPTIONS, PHYSICAL DATA AND ACCESSORIES

Refer to WoodWorks® Channeled Ceilings at armstrongceilings.com/woodworkschanneled



PARTITIONS & WALLS