
Solid Wood Wall Panels Backer or Dowel









▲ WoodWorks Grille - Classics wall installation

These warm, natural wood walls offer installation flexibility and a variety of design options.


KEY SELECTION ATTRIBUTES


- · 10 new standard finishes on solid poplar are tinted to replicate naturally occurring wood tones
- - · Panels are part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today
- · Coordinating solid wood trims in 4" and 6" depths
- · Installation with dowel or flat backer
 - · The natural warmth of wood can contribute to biophilic designs and building certification standards like the WELL™ v2 "Nature and Place" feature



- · Select products included in the FAST134 program - ready to ship in 4 weeks or less
- CleanAssure[™] family of products includes ceiling-to-wall transitions disinfectable panels, suspension systems, FSC® certified wood options available and trim
- · Custom slat sizes and finishes available for every project
- Install in the ceiling, on the wall, or create
 - as a premium quoted option









Solid Wood Wall Panels Backer or Dowel



Declare.





FINISH RANGES ON SOLID POPLAR

Our tinted finishes allow the natural character of the poplar to shine through. The images here reflect the visual range that is likely within our product. Installers will want to lay out panels before installing to achieve preferred aesthetic.





Antique Oak (GAO)



Warm Oak (GWO)

Red Oak (GRK)





English Chestnut (GEC)

Rich Mahogany (GRY)



Golden Maple (GGM)





Species and Finishes Available


Panel backers are black. Made-to-order, custom backer colors available.

LEGACY FINISHES









White (GWH)*

Due to printing limitations, shade may vary from actual product. * Painted White finish is not included in the Sustain® portfolio.



Solid Wood Wall Panels Backer or Dowel






LOCATION

PERFORMANCE

CleanAssure"

STANDARD SIZES

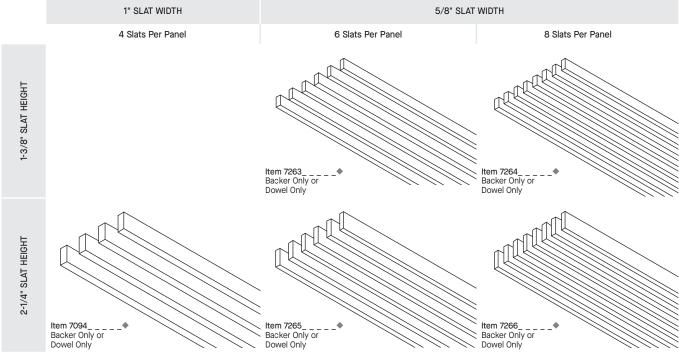

♦ When specifying or ordering please include the installation type and color suffixes (e.g., 7094 BOGLO-4 slats 2-1/4" Backer Only in Light Cherry).

VISUAL SELECTION

| | | | | | | | | Dis | Disinfectable Panels | | |
|---------------------------------|-------------|--------|-----------------|-----------|------------------------------|---|-------------------|-----|----------------------|------|--|
| | Item No. | Custo | om Slat Sizes A | Available | Slat Spacing (Nominal) | Dimensions Nominal W x L x H* (Inches) Custom Sizes Available | % Open Area | Fog | Spray | Wipe | |
| WOODWORKS® Grille – Classics | 7263 | 5/8" W | 1-3/8" H | 6 slats | 1-3/8" | 12 × 96 × 1-7/8" Backer Only 12 × 96 × 1-3/8" Dowel Only | 69% | ٠ | ۰ | ۰ | |
| Backer or Dowel | 7264 | 5/8" W | 1-3/8" H | 8 slats | 7/8" | 12 × 96 × 1-7/8" Backer Only 12 × 96 × 1-3/8" Dowel Only | 58% | ٠ | ٠ | ۰ | |
| | 7265 | 5/8" W | 2-1/4" H | 6 slats | 1-3/8" | 12 × 96 × 2-3/4" Backer Only 12 × 96 × 2-1/4" Dowel Only | 69% | • | 0 | ۰ | |
| | 7266 | 5/8" W | 2-1/4" H | 8 slats | 7/8" | 12 × 96 × 2-3/4" Backer Only 12 × 96 × 2-1/4" Dowel Only | 58% | • | 0 | ۰ | |
| | 7094 | 1" W | 2-1/4" H | 4 slats | 2" | 12 × 96 × 2-3/4" Backer Only 12 × 96 × 2-1/4" Dowel Only | 67% | • | 0 | ٠ | |



FAST134 program items ready to ship from manufacturer in 4 weeks or less. Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134



[◆] When specifying or ordering please include the installation type and color suffixes (e.g., 7263 <u>D Q G B G - 6</u> slats 1-3/8" Dowel Only in Bleached Grey). Installation suffixes: BO = Backer, DO = Dowel NOTE: For additional color and size options, or curved applications options with flexible backers (special order), call TechLine at 1 877 276 7876.

Actual panel length is 95"
NOTE: Panel backers are black. Custom backer colors available.

Solid Wood Wall Panels Backer or Dowel


For LEED contribution contact TechLine

ACCESSORIES

| | ltem No. ◆ | Description | Dimensions Nominal W x L (Inches) | Color | Pcs/ Ctn |
|-------------|---------------|---------------------------|---|--------------|-----------------|
| Accessories | 5672 | Junction - 1-3/8" | 1-1/2 × 96 × 2" | All finishes | Bulk |
| | 5674 [| End Cap – 1-3/8" | 3/4 × 96 × 2" | All finishes | Bulk |
| | 5675 | End Cap - 2-1/4" | 3/4 × 96 × 2-3/4" | All finishes | Bulk |
| | 7170 | End Cap - 3-1/4" | 3/4 × 96 × 3-3/4" | All finishes | Bulk |
| | 7171 | End Cap - 4-1/4" | 3/4 × 96 × 4-3/4" | All finishes | Bulk |
| | 7172 | End Cap - 5-1/4" | 3/4 × 96 × 5-3/4" | All finishes | Bulk |
| | 5687 | Backer Clip | 3/8 × 11/16 × 7/8" | N/A | 250 pcs/pail |
| | 5457GAL1 | End-Stain | N/A | All finishes | 1 Gallon |
| | 5457QT1 | End-Stain | N/A | All finishes | 1 Quart |
| | 5688 | Dowel Clip | 3/8 × 7/8 × 7/8" | N/A | 250 pcs/pail |
| | 5671 | Ledger | 1 × 96 × 1/4" | All finishes | Bulk |
| | 7891 | 12-Gauge Soft Hanger Wire | 144" Length | N/A | 140 |
| | 6459BL | Uptight Clip | 5-1/2" x 1-3/4" | Black | 25 |
| | RC2BL | RC2 Radius Clip | N/A | Black | 205 |
| | 7239 | Adjustable Trim Clip | _ | N/A | 50 |

[♦] When specifying or ordering, include the 3-letter color suffix that coordinates with your WoodWorks wall: (e.g., 5671 © M P). NOTE: For integration with Axiom® trim (Black recommended for use with Solid Wood).

SYSTEM INSTALLATION DETAILS



Wall Backer Assembly

Slat sizes over 2-1/4" are not recommended for wall applications. Contact TechLine for details at 1 877 276-7876

PHYSICAL DATA

Material

Dowel, Slats, Backers, and Tegular panels – solid Poplar

Surface Finish

Clear or tinted semi-gloss coating on all finishes except White (GWH), which has a lacquer finish.

Fire Performance

Class C: ASTM E84 surface burning characteristics. Flame Spread Index 200 or less, Smoke Developed Index

Fire performance will vary between wood species.

Flame stop coating is available as a custom option. Contact ASQuote@armstrongceilings.com for details.

Application Considerations

Variation among panels may occur due to the natural characteristics of the wood and grain.

Design Considerations

Custom slat and panel sizes available. Panel backers are black. Custom backer colors available. For installations where slat alignment is critical, please see the WoodWorks Grille - Forté product line.

Site Conditions

It is very important that panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained.

Installation Consideration When junction accessory is not used, the result will be

a 1" gap between slat lengths.

WoodWorks Grille – Classics panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings & Walls installation instructions.

FAST134 Program Considerations Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Cleaning and Disinfecting
Cleaning and CDC approved disinfecting options available on amstrongceilings.com/cleaning

Warranty

Details at armstrongceilings.com/warranty

Weight 7263 - 0.8 lbs/SF 7264 – 1.64 lbs/SF 7094 – 1.4 lbs/SF

7265 - 13 lbs/SF

7266 – 1.8 lbs/SF

