
WOODWORKS® Grille – Forté Solid Wood Wall Panels with Notched Backers





CAD/Revit® drawings at: armstrongceilings.com/cadrevit




WoodWorks Grille - Forté solid 5-slat panels, 1" W × 2-1/4" H in 48", 72", & 96" lengths in Red Oak (GRK)

The inimitable beauty of solid wood combines with on-trend finishes to offer the industry's largest selection of standard grille designs.

KEY SELECTION ATTRIBUTES

- Over 20 standard solid wood panel configurations in 4', 6', and 8' lengths to minimize the need for customization
- Panels are part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today
- 11 on-trend standard finishes on solid poplar are tinted to replicate naturally occurring wood tones
- Enhanced structural design with notched alignment backers minimize the naturally occurring twist of solid wood and improves handleability during install
- Coordinating solid wood trims in 4" and 6" depths
- The natural warmth of wood can contribute to biophilic designs and building certification standards like the WELL™ v2 "Nature and Place" feature
- Install in the ceiling, on the wall, or create ceiling-to-wall transitions
- Centered backers allow for a nondirectional install, providing flexibility in install layout and clean accessibility
- CleanAssure[™] family of products includes disinfectable panels, suspension systems, and trim
- Premium options include FSC®-certified solid wood, fleece backer, additional tinted finishes, and flexible backers for wall-to-ceiling transitions
- Custom options include unique panel configurations and lengths and additional species and finishes. Contact ASQuote@ armstrongceilings.com
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

SOLID PANEL BACKER DETAIL



TechLine 877 276-7876 armstrongceilings.com/woodworksgrille



WOODWORKS® Grille - Forté Solid Wood Wall Panels with Notched Backers

LEED) V5		
COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	Ø

Declare.

DESIGNING WITH NATURE



Custom Grille installation with biophilic design

Incorporating nature into a built environment, whether living plants or natural wood finishes, enhances indoor environmental quality (IEQ).

With 90% of our time spent indoors, it's beneficial to occupant well-being to bring the outdoors in. Wood interiors contribute to any biophilic design, connecting us with nature and offering a natural warmth and comfort. Inspired by nature and made of natural elements, aesthetically pleasing wood finishes store carbon.

EMBRACING THE BEAUTY OF NATURAL WOOD

Our tinted finishes allow the natural character of the poplar to shine through. The images here reflect the visual range that is likely within our product. Installers will want to lay out panels before installing to achieve preferred aesthetic.

Finish Ranges on Solid Poplar



Forest Walnut (GFW)

Due to printing limitations, shade may vary from actual product. * Painted White finish is not included in the Sustain® portfolio.



Natural Walnut (GWN)

Made-to-order, custom

Warm Oak (GWO)

Custom Wood Species and




White (GWH)*

Armstrong®

WOODWORKS® Grille - Forté

Solid Wood Wall Panels with Notched Backers

STANDARD PANEL CONFIGURATIONS 12" width, 3/4" slat (Available in 4', 6', and 8' nominal lengths)

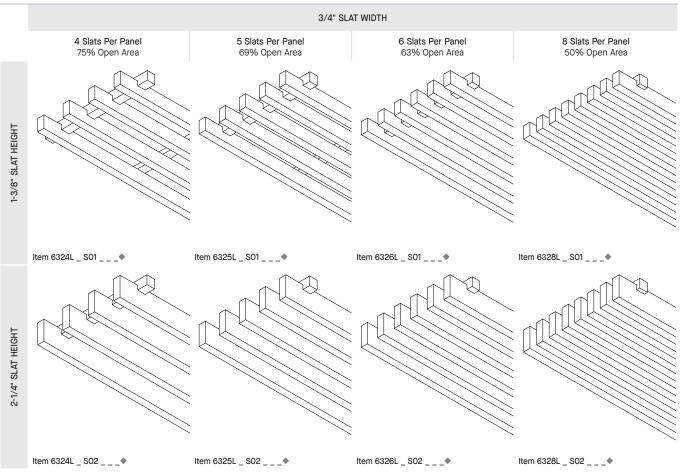


[♦] When specifying or ordering please include the slat length (4, 6, or 8) and finish suffix (e.g., 6324L 8 SOI 9 B G - 4 slats, 3/4 × 96 × 1-3/8" in Bleached Grey).



WOODWORKS® Grille - Forté

Solid Wood Wall Panels with Notched Backers

STANDARD PANEL CONFIGURATIONS 12" width, 1" slat (Available in 4', 6', and 8' nominal lengths)

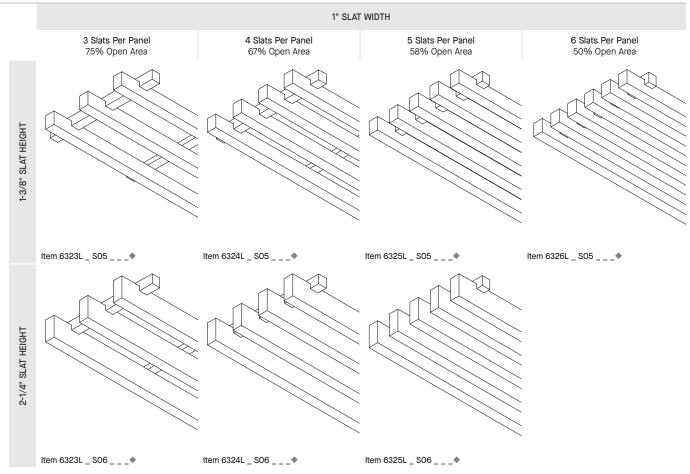


[♦] When specifying or ordering please include the slat length (4, 6, or 8) and finish suffix (e.g., 6324L 6 S05 6 F W - 4 slats, 1 × 42 × 1-3/8* in Forest Walnut).



WOODWORKS® Grille – Forté

Solid Wood Wall Panels with Notched Backers

STANDARD PANEL CONFIGURATIONS 12" width, 1-1/4" slat (Available in 4', 6', and 8' nominal lengths)

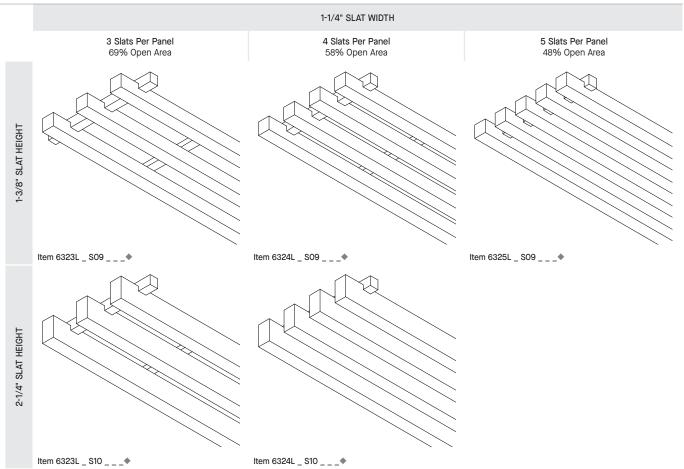

[♦] When specifying or ordering please include the slat length (4, 6, or 8) and finish suffix (e.g., 6323L 8 S09 6 F W - 4 slats, 1-1/4 × 96 × 1-3/8" in Warm Oak).



VISUAL SELECTION

WOODWORKS® Grille – Forté Wall Panels

WOODWORKS® Grille - Forté Solid Wood Wall Panels with Notched Backers

SUSTAIN° High Performance Sustainable Ceiling Systems

Climate Health Declare Label

OCCUPANT EXPERIENCE

EPD EPD Ecosystem Health 3rd Party CDPH Circular Economy

Declare.

PERFORMANCE

②

Ø

							Dis	CleanAssure™ Disinfectable Panels	
ltem No.◆		Custom Slat Sizes A	voilabla	Space Between Slats (Nominal)	% Open Area	LBS/ SF	Fog	Spray	Wipe
6324L _ S01	3/4" W	1-3/8" H	4 slats	2-1/4"	75%	1.2			
00242 _ 001	0/4 11	10,011	4 01010	L 1/4	7070				
6324L _ S02	3/4" W	2-1/4" H	4 slats	2-1/4"	75%	1.8			
6325L _ S01	3/4" W	1-3/8" H	5 slats	1-5/8"	69%	1.4	•	•	٠
6325L _ \$02	3/4" W	2-1/4" H	5 slats	1-5/8"	69%	2.1	•	٠	
6326L _ S01	3/4" W	1-3/8" H	6 slats	1-1/4"	63%	1.6	•	٠	
6326L _ S02	3/4" W	2-1/4" H	6 slats	1-1/4"	63%	2.5			
6328L _ S01	3/4" W	1-3/8" H	8 slats	3/4"	50%	2.1	•		•
6328L _ S02	3/4" W	2-1/4" H	8 slats	3/4"	50%	1.8	•		•
6323L _ S05	1" W	1-3/8" H	3 slats	3"	75%	1.2			
6323L _ S06	1" W	2-1/4" H	3 slats	3"	75%	1.8		•	
6324L _ \$05	1" W	1-3/8" H	4 slats	2"	67%	1.5	•	•	
6324L _ \$06	1" W	2-1/4" H	4 slats	2"	67%	2.3			
6325L _ \$05	1" W	1-3/8" H	5 slats	1-2/5"	58%	1.8			
6325L _ \$06	1" W	2-1/4" H	5 slats	1-2/5"	58%	2.8			
6326L _ \$05	1" W	1-3/8" H	6 slats	1"	50%	2.1			
6323L _S09	1-1/4" W	1-3/8" H	3 slats	2-3/4"	69%	1.4			
6323L _ \$10	1-1/4" W	2-1/4" H	3 slats	2-3/4"	69%	2.1			
6324L _S09	1-1/4" W	1-3/8" H	4 slats	1-3/4"	58%	1.8			
6324L _ \$10	1-1/4" W	2-1/4" H	4 slats	1-3/4"	58%	2.8			
6325L _S09	1-1/4" W	1-3/8" H	5 slats	1-1/8"	48%	2.2	•		

♦ When specifying or ordering please include the slat length (4, 6, or 8) and finish suffix (e.g. 6324L 4 SO1 6 6 M - 4 slats, 3/4 × 48 × 1-3/8* in Golden Maple).

★ All panel configurations are 12* wide

NOTE: Panel backers are black; custom backer colors available. For additional species/finish and size options, or curved applications options with flexible backers (special order), contact ASQuote@armstrongceilings.com



WOODWORKS® Grille – Forté Solid Wood Wall Panels with Notched Backers

ACCESSORIES





Declare.

	ltem No. ♦	Description	Dimensions Nominal W × L × H (inches)	Color	PCS/CTN
Accessories	5687	Backer Clip	3/8 × 11/16 × 7/8"	Black	250
	7290GBL	Flat Backer Kit	7/8 × 12 × 1/2"	Black	18
	5457GAL1	WoodWorks® Solid End- Stain (Gallon)	-	All Finishes	1 Gallon
	5457QT1	WoodWorks Solid End-Sta (Quart)	in –	All Finishes	1 Quart
Perimeter Trim	7146H4L96	4" Solid Wood Trim with 4 Clips	3/4 × 96 × 4"	All Finishes	
	7146H6L96	6" Solid Wood Trim with 4 Clips	3/4 × 96 × 6"	All Finishes	
	5925	Replacement Trim Clips		Mill Finish	25
	7239	Adjustable Trim Clip	-	Mill Finish	
	AX_VESTR	Axiom® Vector Straight Trim – Recommend in Blac 6" and up	ck	Silver Grey, Black, Gun Metal	10 LF
	AX_VECUR	Axiom Vector Curved Trim – Recommend in Black 6" and up		Silver Grey, Black, Gun Metal	10 LF

[♦] When specifying or ordering please include the 3-letter color suffix that coordinates with your WoodWorks wall: (e.g., 6481F07W1H4 N M M).



WOODWORKS® Grille - Forté


Solid Wood Wall Panels with Notched Backers



LEED	V5		
COMMON MATERIALS FRAMEWORK		Climate Health	EP
Human Health	Declare Label HPD	Ecosystem Health	EP
	3rd Party CDPH	Circular Economy	•
OCCUPANT EXPEDIE	NCE	Acquetics	


Declare.

SYSTEM INSTALLATION DETAILS

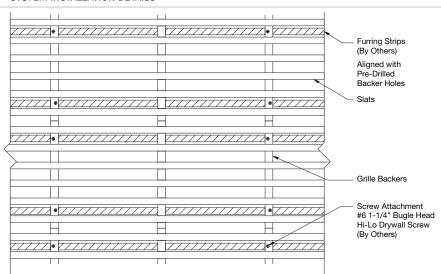

Slat sizes over 2-1/4" are not recommended for wall applications. Contact TechLine for details at 1 877 276-7876.

Wall Mount via Furring Strip

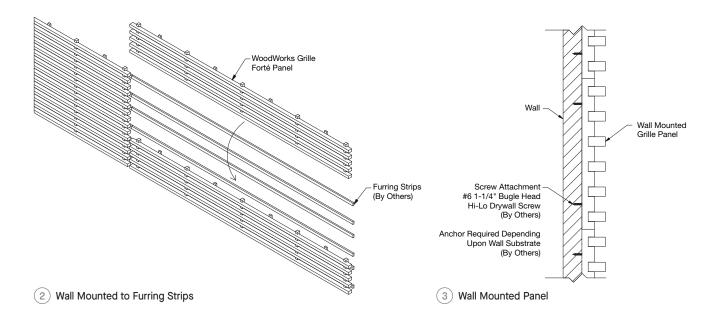

PHYSICAL DATA

Solid Poplar slats and backers.

Surface Finish

Clear, semi-gloss tinted top coat.

Fire Performance

Class C: ASTM E84 surface burning characteristics. Flame Spread Index 200 or less. Smoke Developed Index

Fire performance will vary between wood species.

Flame stop coating is available as a custom option. Contact ASQuote@armstrongceilings.com for details.

Design Considerations

Variation within panel and from panel to panel may occur due to the natural characteristics of the wood and grain.

When installed, there will be a 1" reveal between panel ends. Consider this when designing and laying out your wall and where this reveal will fall within your wall space.

> TechLine / 1877 276-7876 armstrongceilings.com/woodworksgrille

BPCS-6813-925

Panel backers are black; consider installing panels on a dark wall or backdrop.

Custom options include different dimensions, species, and finishes.

Site Conditions

It is very important that panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained.

Ordering Considerations

For projects with phased delivery, please coordinate orders. Each separate order is likely to be pulled from different lumber, and therefore will differ in terms of finish range from previous orders.

Be sure to account for extra material that is normally needed for wood installations. When installing WoodWorks® Grille – Forté panels, you should consider ordering at least 5% extra material. Up to 10% more may be needed for odd size or unique

WoodWorks Grille - Forté panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings & Walls installation instructions.

Design & Pre-Construction Service

For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrongceilings.com/projectworks

Cleaning and Disinfecting Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

Details at armstrongceilings.com/warranty

Weight Refer to Visual Selection chart.

Armstrong® World Industries

LEED* is a registered trademark of the U.S. Green Building Council; Declare* and Living Building Challenge* (LBC) are registered trademarks of the International Living Future Institute*, WELL* and WELL Building Standard* are trademarks of the International WELL Building Institute; Revit* is a registered trademark of Autodesk, Inc.; PSC* is a registered trademark of Forest Stewardship Council*, A.C., iconese code FSC-C007626; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC