

# WOODWORKS® Open Cell Vector Edge



**TOTAL  
ACOUSTICS®**  
Sound Absorption (NRC)  
+ Sound Blocking (CAC)



**SUSTAIN®**  
High Performance  
Sustainable  
Ceiling Systems




**FAST134**  
Select Items Ship Fast  
armstrongceilings.com/fast134



WoodWorks Open Cell 24" x 48" panels in Carbon Grey, wall-to-wall installation

CAD/Revit® drawings at:  
armstrongceilings.com/cadrevit



A decorative, solid wood ceiling that is 100% accessible.

## KEY SELECTION ATTRIBUTES

- new** Standard finishes on solid poplar are tinted to replicate naturally occurring wood tones
- new** Panels are part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today
- FSC® certified wood available as a premium quoted option
- new** The natural warmth of wood can contribute to biophilic designs and building certification standards like the WELL™ v2 "Nature and Place" feature
- Get total noise control and design flexibility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics
- Enhance space volume with open-structure design
- Mix panel sizes for a variety of looks
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Vector edge detail provides safe and secure downward accessibility without tools and narrow reveal visual (1/4")
- Suspension system, trim, and accessories designed and tested to work with WoodWorks® Open Cell panels
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant


# WOODWORKS® Open Cell Vector Edge




LEED V5		
COMMON MATERIALS FRAMEWORK		
Human Health	Declare Label	Climate Health
	HPD	Ecosystem Health
	3rd Party CDPH	Circular Economy
OCCUPANT EXPERIENCE		Acoustics
		EPD
		EPD
		✓
		✓

## new FINISH RANGES ON SOLID POPLAR


Our tinted finishes allow the natural character of the poplar to shine through. The images here reflect the visual range that is likely within our product. Installers will want to lay out panels before installing to achieve preferred aesthetic.



Bleached Grey (GBG)



Classic Grey (GCG)



Carbon Grey (GCB)



Rich Mahogany (GRY)



Antique Oak (GAO)



Red Oak (GRK)



English Chestnut (GEC)



Golden Maple (GGM)



Natural Walnut (GWN)




Warm Oak (GWO)



Forest Walnut (GFW)


### CUSTOM FINISHES



Custom Wood Species and Finishes Available

Panel backers are black. Made-to-order, custom backer colors available.

### LEGACY FINISHES



Maple (GMP)



Light Cherry (GLC)



Dark Cherry (GDC)



White (GWH)\*

Due to printing limitations, shade may vary from actual product.  
\* Painted White finish is not included in the Sustain® portfolio.



WOODWORKS® – Standard

# WOODWORKS® Open Cell Vector Edge








Declare.

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

## VISUAL SELECTION

Item No. ◆	Description	Dimensions Nominal W × L × H (Inches)	% Open Area	LBS/ SF	
		Custom Sizes Available			
WOODWORKS® Open Cell  1/4" Reveal with 15/16" Vector	6734F51L2D1	Four Square with 12" Cells	24 × 24 × 2-1/4"	80%	0.68
					
	6734F51L2D2	Multi-Square with 6" Cells	24 × 24 × 2-1/4"	69%	1.4
					
	6734F51L2D3	Linear with 6" Cells	24 × 24 × 2-1/4"	77%	0.88
					
	6734F51L4D4	Four Square with 12" Cells	24 × 48 × 2-1/4"	85%	1.18
					
	6734F51L4D2	Multi-Square with 6" Cells	24 × 48 × 2-1/4"	73%	1.34
					

**FAST**  
4 WEEKS  
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.  
Up-to-date lead times and product options (sizes and colors) at [armstrongceilings.com/fast134](http://armstrongceilings.com/fast134)

◆ When specifying or ordering, include the appropriate 3-letter color suffix (e.g., 6734F51L2D1 G M P).  
NOTE: For additional color and size options available as special order, call TechLine at 1 877 276-7876.

## PERFORMANCE Dots represent high level of performance. ACOUSTICAL INFORMATION

CleanAssure™ Disinfectable Panels		
Fog	Spray	Wipe
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•

Infill Panel Item No.	NRC	+	CAC	=	Total Acoustics <sup>1</sup>
2820BL	0.85	•	35	•	BEST (NRC 0.85+; CAC 35+)
1713BL	0.70	•	35	•	BETTER (NRC 0.70-0.75; CAC 35+)
1318	0.75	•	30	•	-
5823	0.75	•	N/A	•	-

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.  
**GOOD** (NRC 0.60-0.65; CAC 35+)  
**BETTER** (NRC 0.70-0.75; CAC 35+)  
**BEST** (NRC 0.80+; CAC 35+)

## ACCESSORIES [armstrongceilings.com/wwaccessories](http://armstrongceilings.com/wwaccessories)

	Item No. ◆	Description	Dimensions Nominal W × L × H (inches)	Color	PCS/CTN
Suspension Systems	7301BL	Prelude® XL® 12" HD Main Beam	15/16 × 144 × 1-11/16"	Black	20
	XL7341BL	Prelude XL 4" Cross Tee	15/16 × 48 × 1-11/16"	Black	60
	XL8320BL	Prelude XL 2" Cross Tee	15/16 × 24 × 1-11/16"	Black	60
	7800BL	Angle Wall Molding	7/8 × 144 × 7/8"	Black	30
Accessories	BERC2	Beam End Retaining Clip	N/A	Mill Finish	200
	CHDC	Clear Hold Down Clip	N/A	Clear	50
Acoustical Infill Panels	2820BK	Calla® Square Lay-in Panel	24 × 24 × 7/8"	Black	10
	1713BL	School Zone® Fine Fissured™ Square Lay-in Panel	24 × 24 × 3/4"	Black	12
	1318	Backstage Noir® Square Lay-in Panel	24 × 24 × 3/4"	Black	12
	5823	BioAcoustic™ Infill Panel	24 × 24 × 5/8"	Black Matte	12
Perimeter Trim	7239	Adjustable Trim Clip	N/A	Mill Finish	1
	7146H4L96	4" Solid Wood Trim with 4 Clips	3/4 × 96 × 4"	All Finishes	1
	7146H6L96	6" Solid Wood Trim with 4 Clips	3/4 × 96 × 6"	All Finishes	1
	5925	Adjustable Trim Clip	N/A	Mill Finish	25
	AX_VESTR	Axiom® Vector Straight Trim - Recommend in Black 6" and up	N/A	Silver Grey, Black, Gun Metal	10 LF

◆ When specifying or ordering please include the 3-letter color suffix that coordinates with your WoodWorks ceiling: (e.g., 5457GAL1 G B Q).

TechLine 877 276-7876  
[armstrongceilings.com/woodworksopencell](http://armstrongceilings.com/woodworksopencell)

**Armstrong®**  
World Industries




# WOODWORKS® Open Cell Vector Edge



LEED V5		
COMMON MATERIALS FRAMEWORK		
Human Health	Declare Label	Climate Health
	HPD	Ecosystem Health
	3rd Party CDPH	Circular Economy
OCCUPANT EXPERIENCE		Acoustics
		EPD
		EPD
		✓
		✓

## SYSTEM INSTALLATION DETAILS

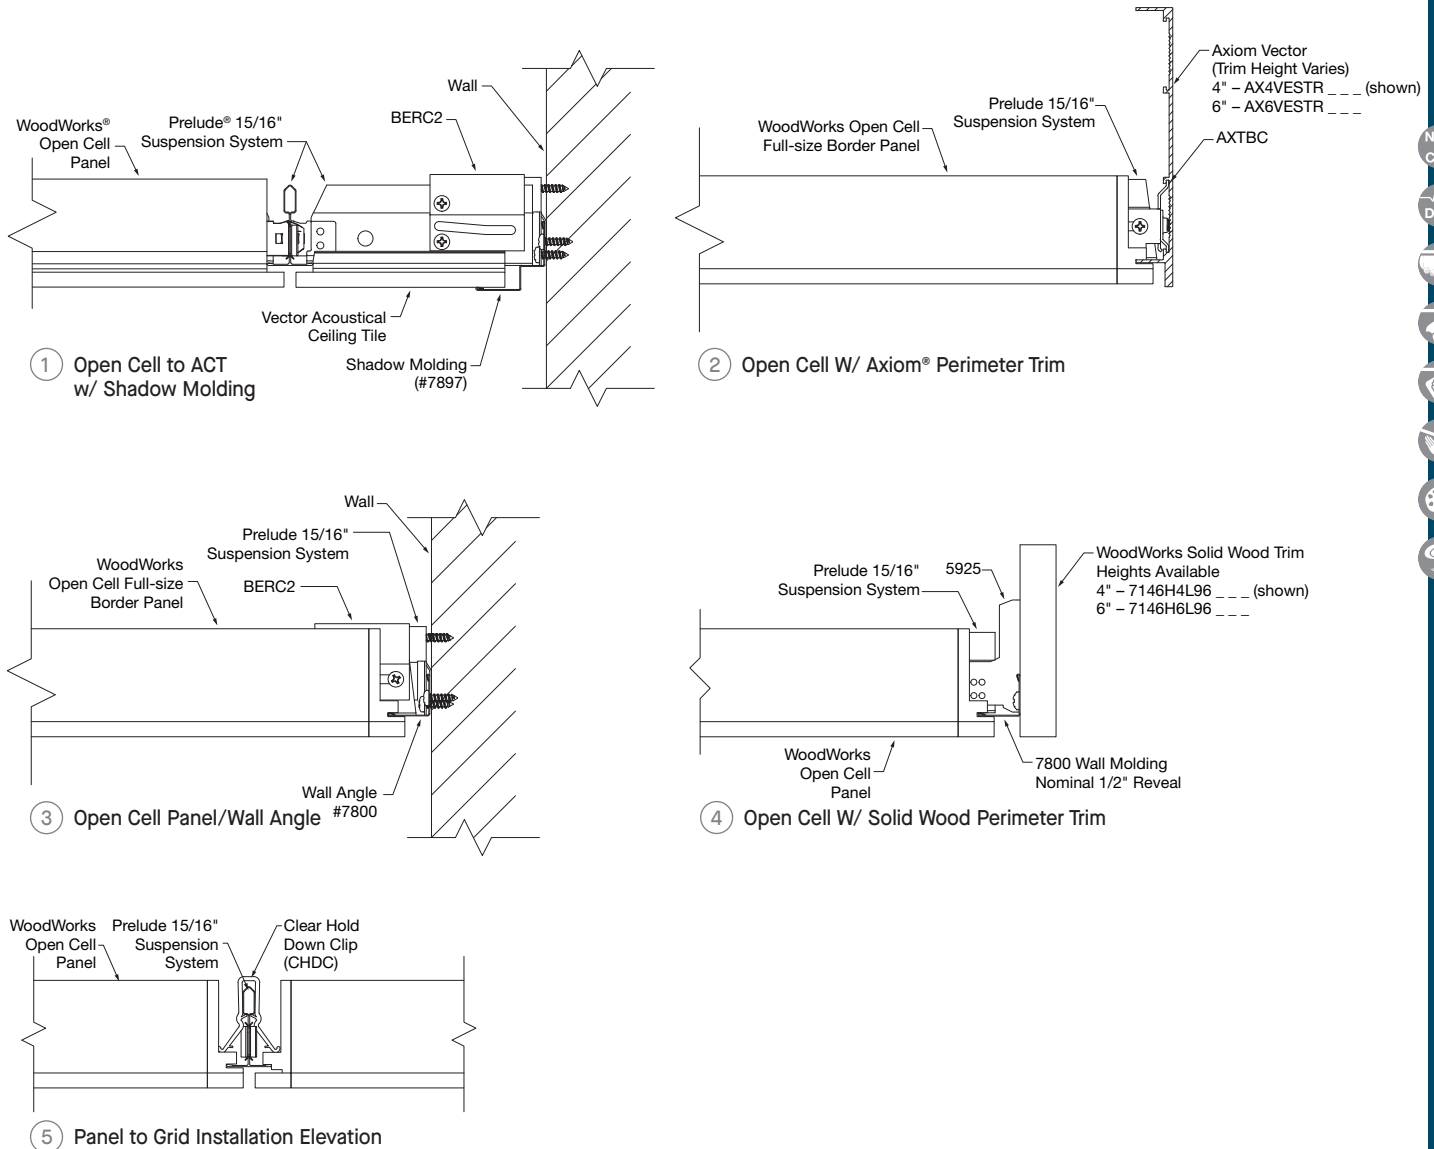

## PHYSICAL DATA

### Material

Solid wood (poplar)

### Surface Finish

Clear or tinted semi-gloss coating.

### Fire Performance

Solid Poplar Hardwood – Class C ASTM E84 surface burning characteristics. Flame Spread Index 200 or less. Smoke Developed Index 450 or less.

Flame stop coating is available as a custom option. Contact ASQuote@armstrongceilings.com for details.

WoodWorks® Open Cell panels, as with other architectural features located at the ceiling, may obstruct or skew the planned fire sprinkler water distribution pattern, or possibly delay or accelerate the activation of the sprinkler or fire detection systems by channeling heat from a fire either toward or away from the device.

Designers and installers are advised to consult a fire-protection engineer, NFPA 13, and local codes for guidance where automatic fire detection and suppression systems are present. For more information, visit [armstrongceilings.com/woodworks](http://armstrongceilings.com/woodworks)

### Application Considerations

Variation among panels may occur due to the natural characteristics of the wood and grain.

### Design Considerations

It is very important that WoodWorks panels be climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained. Exposed, unpainted back of Axiom® trim may be visible when using higher trims on full-size panel installation only.

### Installation Consideration

Do not cut panels.

### Seismic Restraint

WoodWorks Open Cell panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

### Design & Pre-Construction Service

For complimentary design and pre-construction assistance, contact ProjectWorks® or visit [armstrongceilings.com/projectworks](http://armstrongceilings.com/projectworks)

### Cleaning and Disinfecting

Cleaning and CDC-approved disinfecting options available on [armstrongceilings.com/cleaning](http://armstrongceilings.com/cleaning)

### FAST134 Program Considerations

Size of Job Matters: Big jobs, over 2,500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs. Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

### Warranty

Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)

### Weight (Bulk Packaged)

Refer to visual selection chart.