




Brightex™ with AirGuard™ ceilings panels actively remove formaldehyde from indoor air for a healthier environment. Panels are available in a 24-in x 24-in tegular style.

FEATURES & BENEFITS



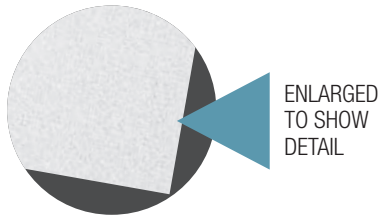

- Ideal for basements and home theaters
- Grid-minimizing edge detail adds beauty to any room
- Superior acoustics; reduce noise 65%
- Superior sag and mold resistance
- Installs on 9/16-in Suprafine® grid

OPTIONS



1231 BRIGHTEX™ WITH AIRGUARD™

PERFORMANCE AND INSTALLATION GUIDE

Item #	Dimensions (Inches)	Edge Detail	Installation Method	Fire Resistance	Sag Resistance	Mold/ Mildew Resistance	Noise Reducing		Light Reflectance	Recycled Material Content
							NRC	CAC		
1231	24 x 24 x 3/4	 Tegular	Suprafine® 9/16-in Grid	Class A	Superior	Superior	0.65	35	0.88	55%

PACKAGING GUIDE

Item #	Dimensions (Inches)	SF Per Ctn	Pcs/Ctn	Lbs/Ctn	Ctns Per Pallet	Layers Per Pallet	Warranty
1231	24 x 24 x 3/4	32	8	35	56	14	10/30-Year

TECHLINE: 1 877 ARMSTRONG (276-7876)
 techline@armstrongceilings.com

ceilings.com