


WoodHaven™ Wainscoting and Wall Installation Instructions

WoodHaven™ Painted White (1148) and Beadboard (1149) planks can also be used as a wainscoting or accent wall. Open cartons 2–3 days prior to the install and allow material to adjust to the relative humidity in the space where it will be installed. Maintain humidity levels after installation.

TOOLS NEEDED:

Hand saw, circular saw (optional), saber saw (optional), measuring tape, chalk line, cordless or hand screwdriver and pencil. When using power tools, be sure to follow the manufacturer's recommendations for their use.

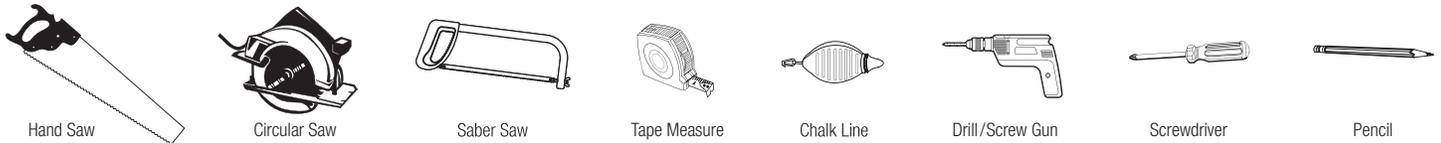

To prevent wet floors from damaging the planks, install a piece of 3/8-in thick lath on the wall at the floor so the bottom of the planks can butt against the top of the lath.

While the traditional orientation of wainscoting is vertical, the WoodHaven planks can be installed on walls either vertically or horizontally.

When installing the planks vertically, you should use a construction adhesive to secure the planks to the wall. Be sure to check that the adhesive is suitable for the wall surface you are adhering to. Follow the adhesive manufacturer's recommendations for surface preparation and application rate. If the planks do not stick to the wall immediately, use painter's tape to hold the planks to the wall until the adhesive sets up. (illus. G)

Planks can also be installed horizontally. When installing horizontally, you will use the WoodHaven clips enclosed in the WoodHaven carton. With the long tongue edge of the first plank resting on the lath, you place the clip over the flange at a stud location. Using #6 x 1-1/4-in drywall screws sold separately (do not use the enclosed screws, they are too short for this application), secure the clip to a wall stud. Fasten clips at every stud location along the plank being installed. (illus. H)

For wainscoting, apply a baseboard of your choice over the bottom of the planks covering the lath and the bottom of the planks. A top trim of your choice can be installed at the top of the planks to serve as a chair rail and finish the installation.


MAINTENANCE RECOMMENDATION:

Clean with a damp cloth.


CAUTION: Wood Dust. Sawing, sanding and machining wood products can produce dust. Airborne wood dust can cause respiratory, eye and skin irritation. The International Agency for Research on Cancer (IARC) has classified wood dust as a nasal carcinogen in humans.

WOODHAVEN™ CEILING PLANK TEN (10) YEAR LIMITED WARRANTY

For additional information on installing ceilings, including special installation tips and videos, please visit our website at ceilings.com or call customer service at 1-877-ARMSTRONG (276-7876).

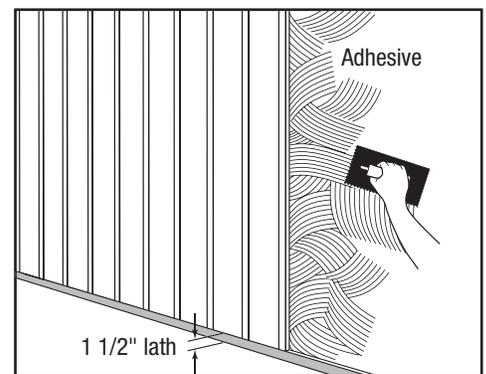

illus. G

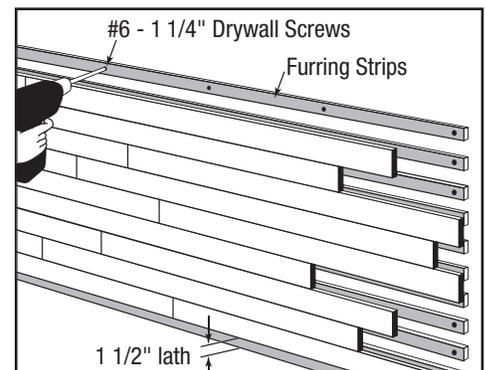

illus. H