

LINEAGE™ Wood Looks Laminate Plank Ceilings

UP TO **95%** RECYCLED CONTENT

Calculate LEED contribution at armstrong.com/greengenie

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- FSC (for wood)
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

▲ LOCATION DEPENDENT



Lineage Wood Looks Laminated Plank Ceilings in Rustic Pine



KEY SELECTION ATTRIBUTES

- Natural, consistent wood-grain look
- Economical alternative to custom millwork
- Pre-finished, durable surface – Washable, Scrubbable
- Maintenance-free; easy installation
- Paintable (Item 1480WHT)

TYPICAL APPLICATIONS

- Hospitality
- Retail/boutiques
- Restaurants
- Condominiums/apartments




VISUAL SELECTION

Edge Profile	Suspension Detail Dwg. Pgs. 226-228	Item Number	Dimensions
Beveled Tongue & Groove 	64	1480 _ _ _*	5" x 7' x 3/8" 

* When specifying or ordering, use the appropriate color suffix with the item number. Example: To order Lineage White, specify item 1480 W H I.
** White planks only.


PERFORMANCE

Dots represent high level of performance.

Fire Rating	Light Reflect	Durability		Recycled Content	Warranty†
					No. of Years
Class C	0.85** •	•	•	High	30

FINISH SELECTION

Due to printing limitations, shade may vary from actual product.

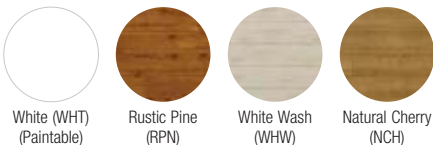

DETAIL



1. Tongue and Groove Edge
2. Beveled Edge

PHYSICAL DATA

Material
Items 1480, RPN, WHW, NCH, CLM – Medium Density Fiberboard (MDF) with printed paper laminate
Item 1480WHT – Painted Medium Density Fiberboard (MDF)



Surface Finish
Urethane-based topcoat

Fire Performance
Class C per IBC. Flame Spread Index of 200 or less and Smoke Developed Index of 450 or less when tested in accordance with ASTM E84.
Please check building code or local code professional for appropriate building applications.

Typical Suspension Systems
Installs directly to metal or wood furring. Installation clips included with each carton.

Application Considerations
Not available in Canada.

10-Year Limited Warranty†
When installed with Armstrong Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
1.62 lbs/SF; 29 SF/ctn

Minimum Order Quantity
1 carton

TechLine / 1 877 276-7876
armstrongceilings.com/commercial
(search: lineage)
BPCS-3875-517

LEED® is a registered trademark of the U.S. Green Building Council
All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2017 AWI Licensing LLC
Printed in the United States of America

Armstrong®
CEILING SOLUTIONS