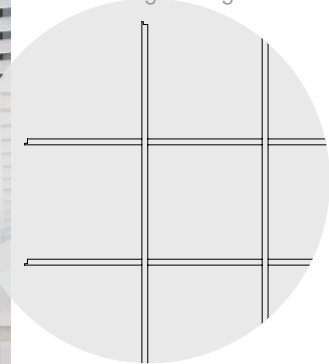


# METALWORKS™ Open Cell

## Square Lay-in

CAD/Revit® drawings at:  
[armstrongceilings.com](http://armstrongceilings.com)



plus...  
 capabilities  
 to do more

[armstrongceilings.com/capabilities](http://armstrongceilings.com/capabilities)  
 See more photos at:  
[armstrongceilings.com/photogallery](http://armstrongceilings.com/photogallery)

MetalWorks™ Open Cell 8" Lay-in panels in White

Durable Open Cell panels are 100% accessible and offer a clean, modern design option.

### KEY SELECTION ATTRIBUTES

- Open look with crisp, white finish
- Variety of design options
- Helps mask the plenum
- Lay-in system is fast and easy to install in a standard suspension system
- Framed 24" x 24" panels create seamless visual; no need for painted grid
- Durable post-production powder-coated finish

**COLOR SELECTION** Due to printing limitations, shade may vary from actual product.



White  
 (WH)



Custom Colors  
 Available






# METALWORKS™ Open Cell Square Lay-in

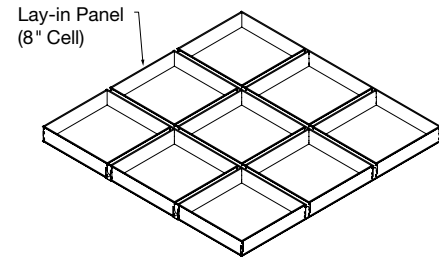
UP TO **85%** RECYCLED CONTENT

For LEED contribution contact TechLine

LEED®	energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/extended producer resp.	low embodied materials	recycled content	sourcing of raw materials	material ingredient reporting	low emitting materials	lighting quality	acoustics
	LOCATION DEPENDENT										WITH INFILL PANEL		

## VISUAL SELECTION

Edge Profile	Item No.	Dimensions (Inches) W x L Custom Sizes Available	Interior Cell Size	% Open	Fire Performance
<b>METALWORKS™ Open Cell Square Lay-in</b>					
9/16" Square Lay-in 	<b>6188</b>	24" x 24"		3"	75% Class A
	<b>6189</b>	24" x 24"		4"	81% Class A
	<b>6193</b>	24" x 24"		6"	87% Class A
	<b>6194</b>	24" x 24"		8"	90% Class A



Installs in standard 9/16" T-Bar suspension system



## PHYSICAL DATA

### Material

Aluminum, 0.016" thick

### Dimensions

Panel: Nominal 24 x 24 x 1-1/2" blade height x 9/16" blade width (matches 9/16" suspension system)

### Interior Cell Sizes

3", 4", 6", and 8"  
Custom cell sizes also available upon request as premium options.

### Surface Finish

Standard white in a powder-coated, post-production painted finish, as well as Custom colors. Contact TechLine for custom color matching requests.

### Accessories

Metal Infill panels (for sprinklers and lighting) available. These fill the 3", 4", 6" and 8" interior cells.

### Fire Performance

ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

### Fire Performance with Sprinklers

MetalWorks™ Open Cell ceilings may affect the planned fire sprinkler water distribution pattern, or possibly delay or accelerate the activation of the sprinkler or fire detection systems by channeling heat from a fire either toward or away from the device.

Designers and installers are advised to consult a fire protection engineer, NFPA 13, and local codes for guidance where automatic fire detection and suppression systems are present.

### Seismic Restraint

MetalWorks Open Cell Lay-in panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong installation instructions.

### Warranty

Details at [armstrongceilings.com](http://armstrongceilings.com)

### Weight/Carton

Ranges from 7-20 lbs/ctn depending on interior cell size

### Square Feet/Carton

40 SF/ctn (panels)

TechLine / 1 877 276-7876  
[armstrongceilings.com/metalworks](http://armstrongceilings.com/metalworks)  
(search: metalworks open cell)  
BPCS-3655-517

LEED® is a registered trademark of the U.S. Green Building Council  
Revit® is a registered trademark of Autodesk, Inc. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates  
© 2016-2017 AWI Licensing LLC Printed in the United States of America

**Armstrong**  
CEILING & WALL SOLUTIONS

140

METALWORKS™