

CIRRUS® Profiles
 Chamfered, Beveled &
 Classic Step™ – Tegular
 medium texture




Cirrus® Classic Step™ panels with Suprafine® XL® 9/16" suspension system (Pgs. 466-467)

These medium-textured ceiling panels feature Total Acoustics® performance with a variety of dimensional edge details.


KEY SELECTION ATTRIBUTES

- Get total noise control and design flexibility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics® performance
- Cirrus® panels are part of the Sustain® portfolio, and meet the most stringent sustainability compliance standards today
- Classic edge details on refined Cirrus texture
- High quality factory-finished edge detail
- Ideal combination of sound absorption and blocking
- USDA-Certified Biobased Product – 94%

COLOR



DETAILS (Other Suspension Systems compatible. Refer to listing on page 293.)

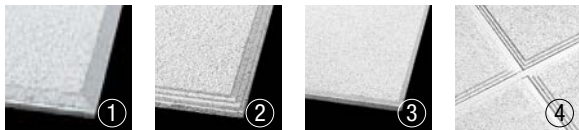

1. Cirrus® Chamfered
2. Cirrus® Classic Step
3. Cirrus® Beveled Tegular
4. Cirrus® Classic Step with Suprafine® 9/16" suspension system

CIRRUS® Profiles

Chamfered, Beveled & Classic Step™ – Tegular medium texture

GREENGUARD
Gold Certified
(details below)



DeclareSM
Living Building
Challenge Compliant

SUSTAINSM
High Performance
Sustainable
Ceiling Systems

UP TO **77%** RECYCLED CONTENT

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- bio-based materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate LEED contribution at armstrongceilings.com/greengenie

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 474-478 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)
CIRRUS® Profiles Chamfered*			
15/16" Tegular	17	628	24 x 24 x 3/4" □
9/16" Tegular	30	557	24 x 24 x 3/4" □
CIRRUS® Profiles Beveled			
9/16" Tegular	29	590	24 x 24 x 3/4" ▣
CIRRUS® Profiles Classic Step™			
15/16" Tegular	19	626	24 x 24 x 3/4" ▣
15/16" Tegular	18	591	24 x 24 x 3/4" □
9/16" Tegular	31	591	24 x 24 x 3/4" □
9/16" Tegular	32	585	24 x 24 x 3/4" ▣


PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics		Total Acoustics ¹	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-Yr Warranty
NRC	+ CAC	= NRC + CAC			Bio-Block	Humi-Guard+					
0.65	35	GOOD	Class A	0.85	•	•	•	Std	•	•	•
0.65	35	GOOD	Class A	0.85	•	•	•	Std	•	•	•
0.65	35	GOOD	Class A	0.85	•	Std	•	Std	•	•	10-Yr
0.65	35	GOOD	Class A	0.85	•	•	•	Std	•	•	•
0.65	35	GOOD	Class A	0.85	•	•	•	Std	•	•	•
0.65	35	GOOD	Class A	0.85	•	Std	•	Std	•	•	10-Yr

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.
GOOD (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)
 * Ceiling design copyrighted by AWI Licensing LLC.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification

557, 591, 628 – Type III, Form 1, Pattern E I
 585, 590, 626 – Type III, Form 1, Pattern E I K
 Fire Class A

Humidity/Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes items 585, 590, 626.

Mold/Mildew Protection

Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

VOC Emissions

GREENGUARD Gold Certified
 Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
 UL.COM/66
 UL 2818



Primary (Embodied) Energy

See all LCA information on our EPDs.

High Recycled Content

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and

pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 1.9 (BTU units)
 R Factor – 0.33 (Watts units)

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com

Weight; Square Feet/Carton

590, 591 – 1.06 lbs/SF; 48 SF/ctn
 557, 585, 626, 628 – 1.17 lbs/SF; 48 SF/ctn

Minimum Order Quantity

1 carton

Metric Items Available

628M, 557M, 590M, 591M, 626M, and 585M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine / 1 877 276-7876
armstrongceilings.com/commercial
 (search: cirrus)
 BPCS-4016-718

LEED® is a registered trademark of the U.S. Green Building Council
 Declare™ is a service mark of The International Living Future Institute
 UL is a registered trademark of UL LLC. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
 © 2018 AWI Licensing LLC Printed in the United States of America

