GRAPHIS® Finetex™

Wrapped Linear,
Cubic & NeoCubic™
fine texture

GRAPHIS® Rustex™

Cubic Beveled &
Linear Beveled
coarse texture

NeoCubic

Cubic

Wrapped Linear



Graphis® Finetex™ Wrapped Linear™ panels with Suprafine® XL® 9/16" suspension system (Pgs. 466-467)

Linear Beveled

Cubic Beveled



Graphis® Rustex™ Cubic Beveled panels with Suprafine® XL® 9/16" suspension system (Pgs. 466-467)

These panels offer bold geometric and linear patterns with unique visual designs.

KEY SELECTION ATTRIBUTES

Finetex™

- Finely sculptured geometric patterns
- Single- and multi-design options
- High light reflectance
- 30-Year Limited System Warranty

Rustex™


- Bold geometric designs
- Good sound absorption
- 30-Year Limited System Warranty

NOTE: Finetex™ panels are not recommended for areas requiring acoustical performance

COLOR

White
(WH)

DETAILS (Other Suspension Systems compatible. Refer to listing on page 325.)

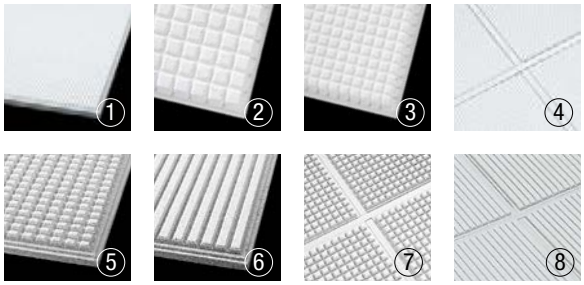

1. Graphis® Finetex™ Wrapped Linear
2. Graphis® Finetex™ Cubic
3. Graphis® Finetex™ NeoCubic™
4. Graphis® Finetex™ Wrapped Linear with Suprafine® 9/16" suspension system
5. Graphis® Rustex™ Cubic Beveled
6. Graphis® Rustex™ Linear Beveled
7. Graphis® Rustex™ Cubic Beveled with Suprafine® 9/16" suspension system
8. Graphis® Rustex™ Linear Beveled with Suprafine® 9/16" suspension system

GRAPHIS® Finetex™ & Rustex™

Wrapped Linear™, Cubic & NeoCubic™
fine texture

Cubic Beveled & Linear Beveled
coarse texture

GREENGUARD Gold Certified
(details below)

UP TO 72% RECYCLED CONTENT

Calculate LEED contribution at armstrongceilings.com/greengenie

LEED®: energy management; construction waste mgmt; regional materials; design for flexibility; EPD; recyclable/extended producer resp.; biobased materials; recycled content; sourcing of raw materials; material ingredient reporting; low emitting/materials; lighting quality; acoustics

LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE SELECTION

Dots represent high level of performance.


$$$$

Edge Profile	Susp. Dwg. Pgs. 474-478 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)	UL Classified Acoustics NRC	+ CAC	= Total Acoustics[1]	Fire Performance	Light Reflect	Mold & Mildew Protection (Bio-Block)	Sag Resist (Humi-Guard+)	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-Yr Warranty
GRAPHIS® Finetex™															
	Wrapped Linear														
9/16" Wrapped Tegular	34	**8005**	24 x 24 x 3/4" ☐	N/A	35 •	–	Class A	0.90 •	–	–	•	Std	Std	•	•
	Cubic														
	36	**8006**	24 x 24 x 3/4" ☐	N/A	35 •	–	Class A	0.90 •	–	–	•	Std	Std	•	•
	NeoCubic™														
	35	**8007**	24 x 24 x 3/4" ☐	N/A	35 •	–	Class A	0.90 •	–	–	•	Std	Std	•	•
GRAPHIS® Rustex™															
	Cubic Beveled														
15/16" Beveled Tegular	20	**2600**	24 x 24 x 3/4" ☐	0.55	30	–	Class A	0.75	•	•	•	Std	•	•	•
	Linear Beveled														
	20	**2602**	24 x 24 x 3/4" ☐	0.55	30	–	Class A	0.75	•	•	•	Std	•	•	•
	Cubic Beveled														
9/16" Beveled Tegular	33	**2600**	24 x 24 x 3/4" ☐	0.55	30	–	Class A	0.75	•	•	•	Std	•	•	•
	Linear Beveled														
	33	**2602**	24 x 24 x 3/4" ☐	0.55	30	–	Class A	0.75	•	•	•	Std	•	•	•

[1] Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

SUSPENSION SYSTEMS

15/16"




Prelude®
Beveled Tegular

9/16"



Suprafine®
Wrapped Tegular



Suprafine®
Beveled Tegular

PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
Type III, Form 2, Pattern J Z
Fire Class A

Mold/Mildew Protection (Rustex™ only)
Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818

GREENGUARD GOLD

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor - 1.6 (BTU units)
R Factor - 0.28 (Watts units)

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com

Weight; Square Feet/Carton
0.90 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
2600M, 2602M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine / 1 877 276-7876
armstrongceilings.com/commercial
(search: graphis)
BPCS-4610-718

LEED® is a registered trademark of the U.S. Green Building Council
UL is a registered trademark of UL LLC. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2018 AWI Licensing LLC Printed in the United States of America

Armstrong® CEILING & WALL SOLUTIONS