

WOODWORKS® Channeled Vector®



plus capabilities
to do more

armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

These FSC®-certified ceiling panels are available in rich, real wood veneers or economical Wood Looks visuals.

KEY SELECTION ATTRIBUTES

- Real wood veneers or Images™ high-quality printed visuals
- Create a continuous ceiling, cloud, or ceiling-to-wall transition
- Acoustical backing improves sound quality
- Shorter lead times and lower costs than custom millwork
- Class A fire performance

Natural Variations™ Finishes

- FSC chain of custody (CoC) certified WoodWorks® products represent responsible production and consumption practices from the forest to the consumer
- 100% Biobased content
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits

Images™ Finishes

- Larger Vector panel sizes – 24" x 48", 12" x 48", and 30" x 30" for even more design flexibility
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits

VENEERS Due to printing limitations, shade may vary from actual product.


Natural Variations (Real Wood Veneers)



Custom Veneers Available

VENEER PERFORATION OPTIONS

(Actual 1:2 scale shown)

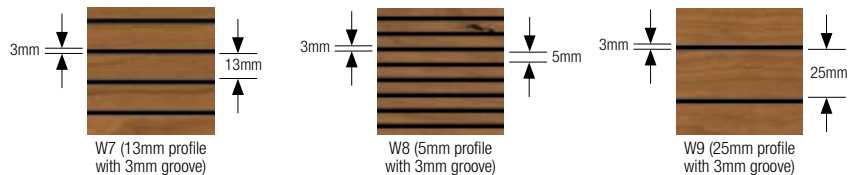


IMAGES™ FINISHES

(High-Quality Printed Finishes)



IMAGES PERFORATION OPTIONS

(Actual 1:2 scale shown)

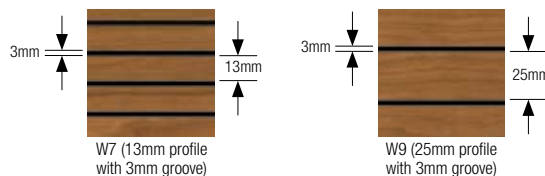

WOODWORKS® Channeled Vector®



UP TO 75% RECYCLED CONTENT

For LEED contribution contact TechLine



VISUAL SELECTION

Edge Profile	Item No. ♦	Dimensions Nominal W x L x H (Inches) <small>Custom Sizes Available</small>	Perforations
FSC®-certified WOODWORKS Channeled Vector® Veneers Perforated (with Acoustical Fleece)			
1/4" Reveal with 15/16" Vector 	5903 _ _ _ _ _	24 x 24 x 3/4" □	W7, W8, W9
FSC®-certified WOODWORKS Channeled Vector Images™ Finishes Perforated (with Acoustical Fleece)			
1/4" Reveal with 15/16" Vector 	6682 _ _ _ _ _	24 x 24 x 11/16" □	W7, W9
	6680 _ _ _ _ _	12 x 48 x 11/16" □	
	6684 _ _ _ _ _	24 x 48 x 11/16" □	
	6686 _ _ _ _ _	30 x 30 x 11/16" □	

♦ When specifying or ordering, include the appropriate 2-letter perforation suffix and the color suffix (e.g., 6682W Z P M E.)

PERFORMANCE


Fire Rating
Class A

ACOUSTICAL INFORMATION


Dots represent high level of performance.

Perforation	NRC panels
W7 	0.75 • 0.80† •
W8 	0.80 • 0.90† •
W9 	0.50 0.60†

† NRC when installed with acoustical infill (item 8200T10 or 5479)



SUSPENSION SYSTEMS



Prelude suspension system is available in many standard colors. All other suspension systems are available in standard White only. Other colors available as special order.

ACCESSORIES

Natural Variations™ and Images™ finishes are designed to coordinate with each other. Trim and infill panels are available. See Pgs. 252-253 in this catalog or visit armstrongceilings.com/woodworks

PHYSICAL DATA

Material
FSC®-certified fire-retardant medium-density fiberboard with face-cut veneers (RA-COC-003601). For more information about FSC®-certified products, or to view our FSC®-certification letter, visit armstrongceilings.com/woodworksfscc

Surface Finish
Clear or tinted semigloss coating

Fire Performance
ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

ASTM E1264 Classification
Composite – Fire Class A

Application Considerations
Variation among panels may occur due to the natural characteristics of the wood and grain.

It is very important that WoodWorks® panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained throughout the life of the product.

Specification Consideration
Attention: For FSC certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint
WoodWorks Channeled wood panels have been engineered, tested, and approved in all seismic areas when installed per Armstrong Ceilings installation instructions.

Warranty
Details at armstrongceilings.com

Panel Weight
2.2 lbs/SF (Bulk packaged)

TechLine / 1 877 276 7876
armstrongceilings.com/woodworks
(search: woodworks channeled vector)

BPCS-5417-319

LEED® is a registered trademark of the U.S. Green Building Council®
Rainforest Alliance Certified™ is a trademark of Rainforest Alliance.
FSC® is a registered trademark of FSC Forest Stewardship Council®, A.C.,
license code FSC-C007626. All other trademarks used herein
are the property of AWI Licensing LLC and/or its affiliates
© 2019 AWI Licensing LLC Printed in the United States of America

