


CIRRUS® Themes™

Critters™, Leaves™, Stars™, Things That Fly™
& Under the Sea™ – Tegular
medium texture

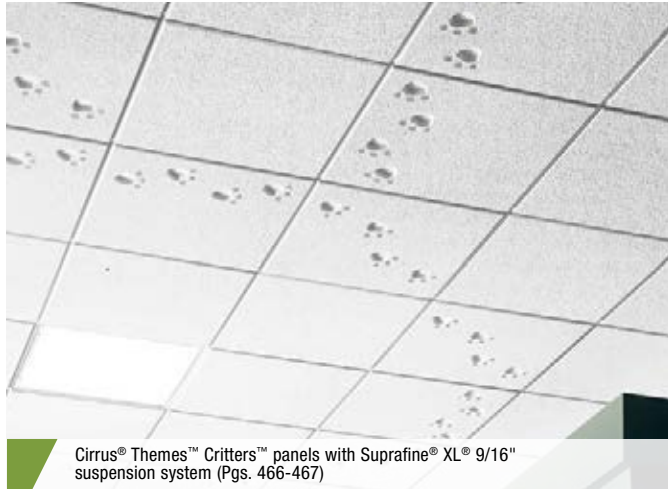

Cirrus® Themes™ ceiling panels have a playful design and bring fun to your project.




KEY SELECTION ATTRIBUTES

- A variety of lighthearted panel designs on classic Cirrus texture; can be spot-painted
- Coordinating plain panels available
- USDA-Certified Biobased Product – 94%

COLOR



White
(WH)

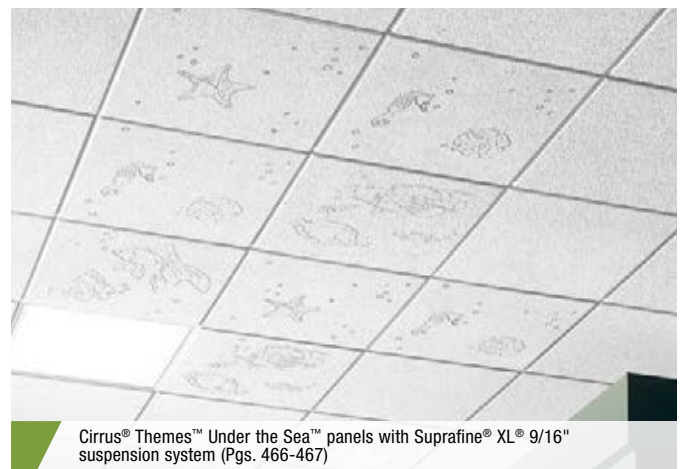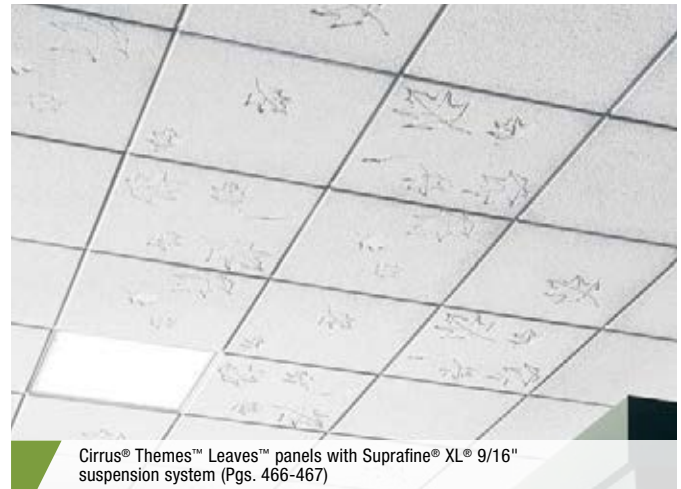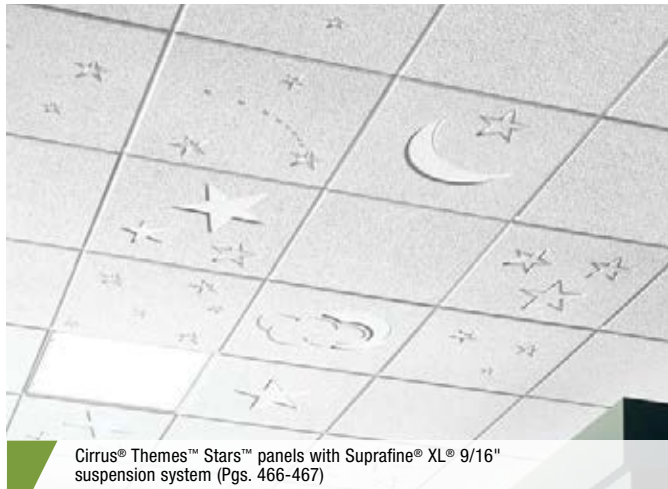

CIRRUS® Themes™

Critters™, Leaves™, Stars™, Things That Fly™
& Under the Sea™ – Tegular
medium texture

67% RECYCLED CONTENT

LEED®
energy management
construction waste to reuse
regional materials
design for flexibility
EPD
recyclable/extended producer resp.
biobased materials
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

Calculate LEED contribution at armstrongceilings.com/greengenie

GREENGUARD Gold Certified
(details below)

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 474-478 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)
		See Below	24 x 24 x 3/4" □
		See Below	24 x 24 x 3/4" □

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$


UL Classified Acoustics		Total Acoustics ¹	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycled Program	Warranty
NRC	+ CAC	=									
N/A	N/A	-	Class A	0.85	•	Std	•	Std	•	•	10-Yr
N/A	N/A	-	Class A	0.85	•	Std	•	Std	•	•	10-Yr

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

CIRRUS Themes Critters	CIRRUS Themes Leaves	CIRRUS Themes Stars	CIRRUS Themes Things That Fly	CIRRUS Themes Under the Sea	Plain Panel
S500/S550	S600/S650	S400/S450	S700/S750	S800/S850	S299/S295 Must use Item S295 or S299 for Coordinating Plain Panel
S501/S551	S601/S651	S401/S451	S701/S751	S801/S851	
S502/S552	S602/S652	S411/S461	S703/S753	S802/S852	
S503/S553	S603/S653	S412/S462	S704/S754	S803/S853	
S510/S560	S604/S654	S414/S464	S706/S756	S804/S854	
S512/S562	S605/S655	S420/S470	S707/S757	S805/S855	
		S421/S471	S708/S758		

CIRRUS Themes Critters		CIRRUS Themes Leaves		CIRRUS Themes Stars		CIRRUS Themes Things That Fly		CIRRUS Themes Under The Sea	
15/16" Angled Tegular	9/16" Beveled Tegular	15/16" Angled Tegular	9/16" Beveled Tegular	15/16" Angled Tegular	9/16" Beveled Tegular	15/16" Angled Tegular	9/16" Beveled Tegular	15/16" Angled Tegular	9/16" Beveled Tegular
S550	S500	S650	S600	S450	S400	S750	S700	S850	S800
S551	S501	S651	S601	S451	S401	S751	S701	S851	S801
S552	S502	S652	S602	S460	S410	S752	S702	S852	S802
S553	S503	S653	S603	S461	S411	S753	S703	S853	S803
S560	S510	S654	S604	S462	S412	S754	S704	S854	S804
S562	S512	S655	S605	S463	S413	S755	S705	S855	S805
S295	S299	S295	S299	S464	S414	S756	S706	S295	S299
				S470	S420	S757	S707		
				S471	S421	S758	S708		
				S295	S299	S295	S299		

SUSPENSION SYSTEMS



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

ASTM E1264 Classification

Type III, Form 1, Pattern E I K Z (scored multi-patterned finish)
S299, S295 – Type III, Form 1, Pattern E I Fire Class A

Humidity/Sag Resistance

Standard performance ceiling panels are recommended where the building is enclosed and the HVAC is continuously functioning.

Mold/Mildew Protection

Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

VOC Emissions

GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG UL 2818



High Recycled Content

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

Warranty

Details at armstrongceilings.com

Weight; Square Feet/Carton

All design panels – 1.38 lbs/SF; 8 SF/ctn
S295 – 1.09 lbs/SF; 48 SF/ctn
S299 – 1.17 lbs/SF; 48 SF/ctn

Minimum Order Quantity

1 carton