


WOODWORKS®

Standard Wall Panels



CAD/Revit® drawings at:
armstrongceilings.com

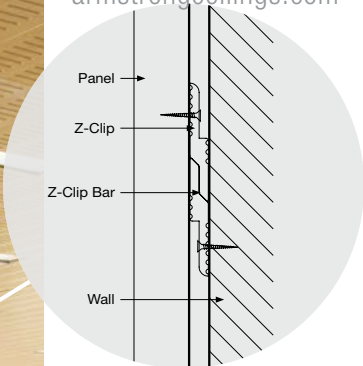

plus capabilities
to do more

armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

WoodWorks® wall panels 24" x 48" on Z-Clips and WoodWorks® Vector® ceiling panels 24" x 48" with custom perforation (running parallel to the short side of the panel) in custom Vertical Grain Douglas Fir

Wall system available in a variety of wood species, stains, sizes, and perforation options.

KEY SELECTION ATTRIBUTES

- Coordinate veneer choice with WoodWorks® ceilings
- Install panels horizontally or vertically using clips or splines
- Perforated panel with acoustical backing improves sound quality and reduces reverberation time within a space
- USDA Certified Biobased Product, 100%
- Biobased value is only for the panel and does not include the infill

VENEERS

Due to printing limitations, shade may vary from actual product.

Natural Variations™

(Real Wood Veneers)




Constants™

(Real Wood Veneers)




Bamboo*

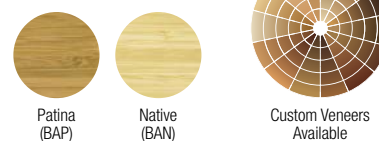

* Veneer is rapidly renewable. Bamboo is a grass that only requires 3-7 years for maturity and does not have to be replanted after each harvest.

PERFORATION OPTIONS

(Actual 1:6 scale shown)

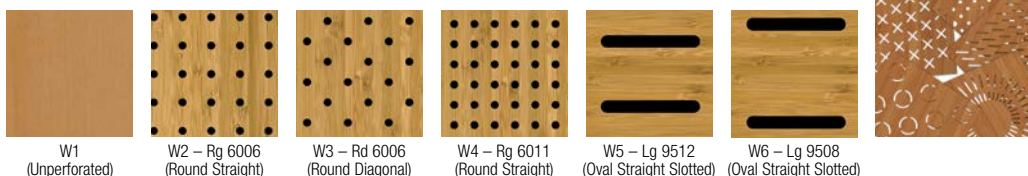

Custom Perforations Available

NOTE: Slotted perforations run parallel to the length of the panel.

WOODWORKS®

Standard Wall Panels



92% RECYCLED CONTENT

Calculate LEED contribution at armstrongceilings.com/greengenie



VISUAL SELECTION

Item No. ♦	Dimensions W x L x H* (Inches)	Perforation Options	Installation Options
	Custom Sizes Available		
FSC®-certified WOODWORKS® Wall Panels with Acoustical Fleece			
5814	23-3/4 x 47-3/4 x 3/4"	W1, W2, W3, W4, W5, W6	X (Z-Clip installation) K (Spline installation – 4 panel sides kerfed)
5818	23-3/4 x 95-3/4 x 3/4"	W1, W2, W3, W4, W5, W6	X (Z-Clip installation) K (Spline installation – 4 panel sides kerfed)
5819	23-3/4 x 107-3/4 x 3/4"	W1, W2, W3, W4, W5, W6	X (Z-Clip installation) K (Spline installation – 4 panel sides kerfed)
5820	23-3/4 x 119-3/4 x 3/4"	W1, W2, W3, W4, W5, W6	X (Z-Clip installation) K (Spline installation – 4 panel sides kerfed)

♦ When specifying or ordering, include the appropriate perforation, installation, and finish suffixes. (e.g., 5814 W 1 K N M P)
NOTE: For veneers and sizes available as special order, call TechLine at 1 877 276-7876.
* Panels will be installed with 1/4" or larger gap between panels. When using spline installation, module will be 24".

ACOUSTICAL INFORMATION

Dots represent high level of performance.

Perforation	NRC Rating	
	D Mounting w/ Acoustical Fleece	D Mounting w/ 1" Fiberglass Infill*
W1 	N/A	N/A
W2 	0.50	0.65
W3 	0.50	0.65
W4 	0.55	0.80
W5 	0.45	0.70
W6 	0.45	0.60


* Fiberglass Infill Panel Item 8200T10

WOODWORKS Wall perforations align with the following ceiling panels:

Perforation	WoodWorks® Vector®	WoodWorks Concealed
W2	yes	yes
W3	yes	yes
W4	yes	no
W5	yes	no
W6	yes	no

ACCESSORIES

For corners, splines, Z-Clips, and infill panel options, see Pgs. 528-529.



PHYSICAL DATA

Material

FSC®-certified fire-retardant particle board with face-cut veneers (SW-COC-003601). For more information about FSC®-certified products, or to view our FSC®-certification letter, visit armstrongceilings.com/woodworksfscc

Surface Finish

Clear or tinted semigloss coating

Fire Performance

Class A ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

Application Considerations

Variation among panels may occur due to the natural characteristics of the wood and grain (special order panels available).

It is very important that WoodWorks® panels are climatized prior to installation. Relative humidity between 25% and 55% and temperatures between 50°F and 86°F must be maintained throughout the life of the product.

Design Considerations

The reveal width on WoodWorks Tegular panels and WoodWorks Walls is different. For an application with the same size reveal in the ceiling and on the wall, order custom-cut panels or use Vector® ceiling panels Z-clipped to the wall.

Specification Consideration

Attention: For FSC-certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Warranty

Details at armstrongceilings.com

Weight; Square Feet/Carton

Panels – 2.75 lbs/SF; bulk packaged per order.

TechLine / 1 877 276-7876
armstrongceilings.com/walls
(search: woodworks walls)
BPCS-5098-720

LEED® is a trademark of the U.S. Green Building Council
Revit® is a registered trademark of Autodesk, Inc.; FSC® is a registered trademark of FSC Forest Stewardship Council®, A.C., license code FSC-C007626. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2020 AWI Licensing LLC Printed in the United States of America

Armstrong®
CEILING & WALL SOLUTIONS

521

WALLS