ACOUSTIBUILT™

Seamless Acoustical Ceiling & Wall System

Design Guide

Inspiring Great Spaces®

Armstrong®
CEILING & WALL SOLUTIONS

Smooth and CLEAN Monolithic Visual

The ACOUSTIBuilt™ seamless acoustical ceiling and wall system provides the clean monolithic visual of drywall with Total Acoustics® and Sustain® performance. ACOUSTIBuilt combines excellent acoustical performance and sustainability attributes with efficient installation in wall-to-wall and cloud applications for any space and on walls above 7 feet.

- Excellent acoustical performance of up to NRC 0.80 and CAC 46
- Use ACOUSTIBuilt on ceilings for wall-to-wall, cloud, sloped, or soffit applications and in wall applications above 7'
- Smooth non-directional, monolithic, drywall-like visual (Level 4 equivalent finish)
- Add a hint of color, tailored to your design palette
- Quick, easy panel installation using Armstrong® Drywall Grid System
- Faster and easier to install and repair than acoustical plaster at a lower cost

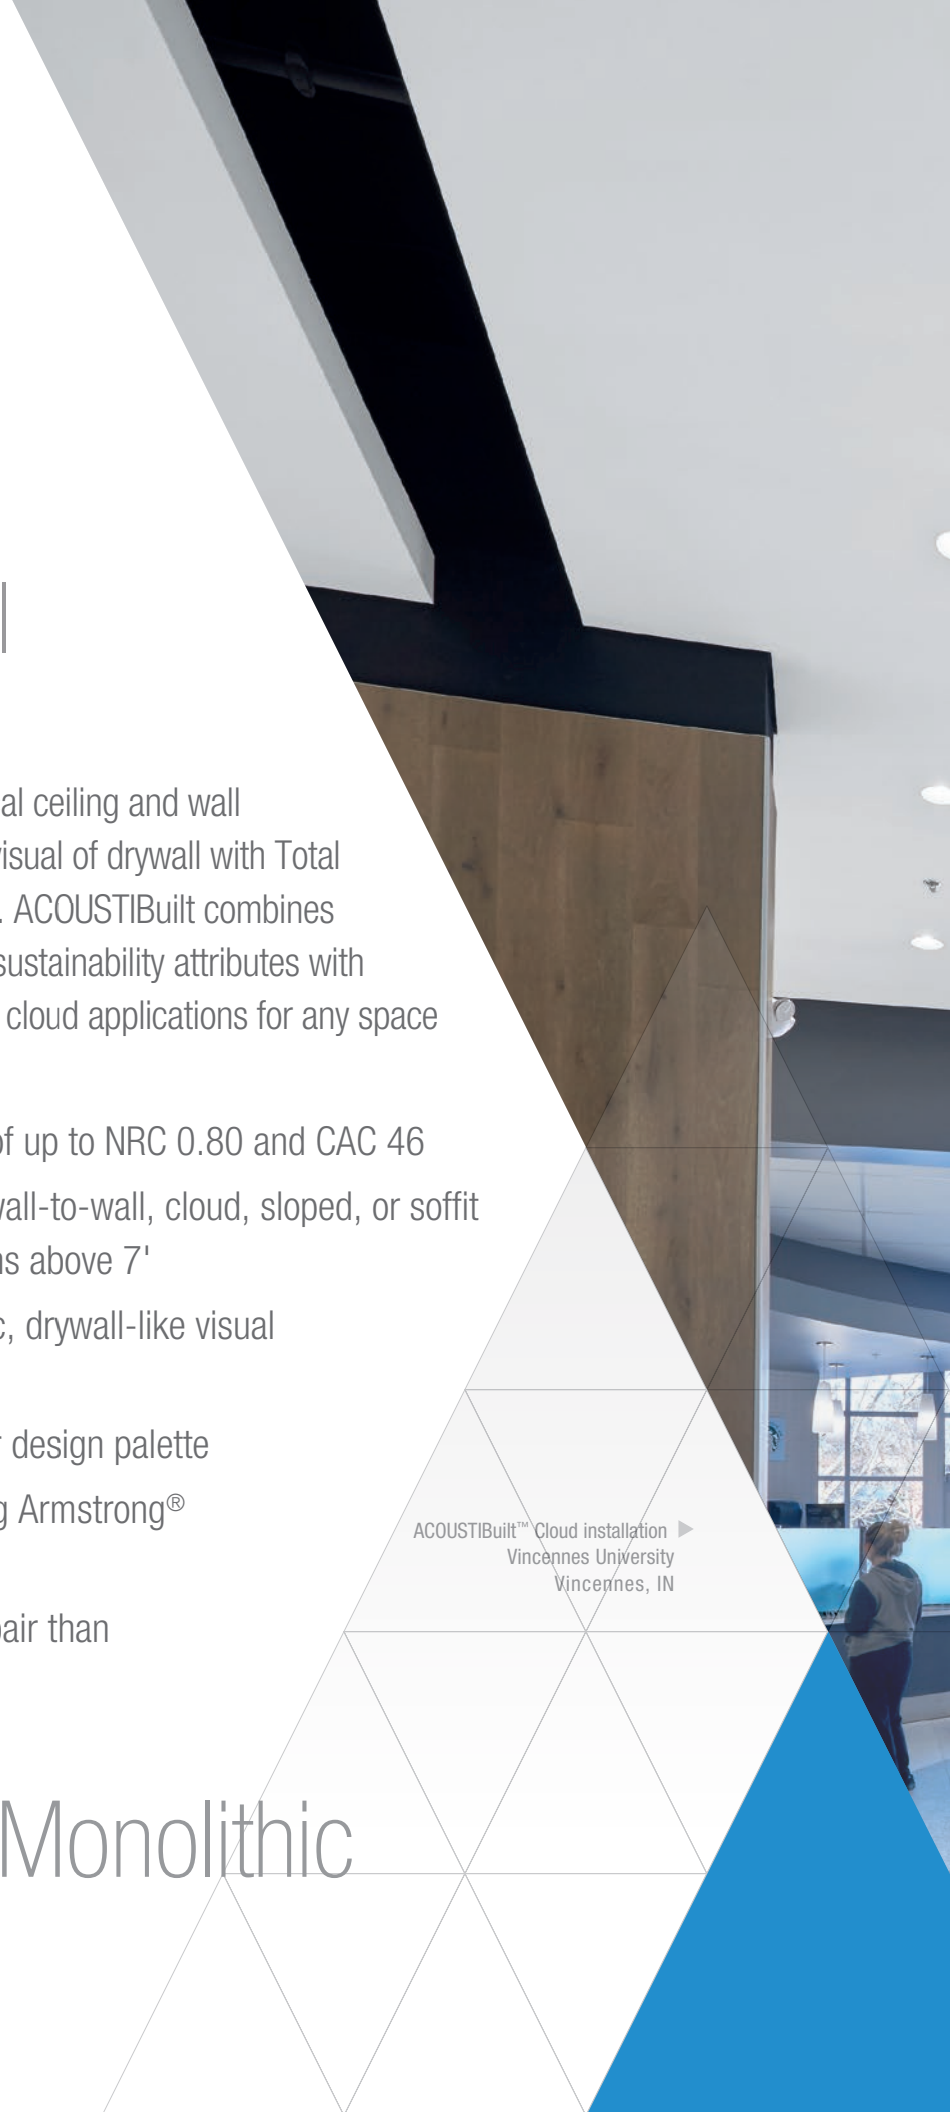

ACOUSTIBuilt™ Cloud installation
Vincennes University
Vincennes, IN

Seamless and Monolithic

▲ ACOUSTIBuilt™ Ceiling System; Interstate Drywall Corporate Office

Acoustics & AESTHETICS

The ACOUSTIBuilt™ seamless acoustical ceiling and wall system combines the monolithic look of traditional drywall with Total Acoustics® performance, the ideal combination of sound absorption and sound blocking. Sound absorption reduces noise while sound blocking keeps it from traveling into adjacent spaces. Together these attributes help you create quiet spaces.

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Total Acoustics® Performance

Now, whether you're creating a space for quiet concentration, collaboration, or confidentiality, one system meets the needs for today's flexible spaces.

TOTAL ACOUSTICS®
Sound Absorption (NRC) + Sound Blocking (CAC)

The ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall system provides high sound absorption (NRC up to 0.80) and high sound blocking up to CAC 46 to achieve Total Acoustics® performance.

ACOUSTIBuilt cloud installations can enhance the design and acoustical performance of a space and will absorb sound from both the front and back surfaces.

In wall applications, AcoustiBuilt improves the STC of interior stud/ drywall partition systems by up to 6 points for added sound blocking.

STC Rating*
1 Side: 42
2 Sides: 43

*3-5/8" metal studs with one layer of 5/8" drywall on both sides and AcoustiBuilt panels on one or both sides of the wall.

ACOUSTIBuilt vs. Drywall Acoustical Comparison

5,000 SF Exposed Structure (50' x 100'), 15' to deck, drywall with windows on two sides, commercial carpet	5/8" Drywall Ceiling	ACOUSTIBuilt™ Seamless Acoustical Ceiling System	ACOUSTIBuilt™ Clouds 50% coverage – (equivalent to 2,500 SF of clouds)*	
Sound Absorption	0.05	0.80 NRC	0.80 Sabins/SF	1.33* Sabins/SF
CAC	50	46	N/A	N/A
Total Acoustics®	N/A	BEST	N/A	N/A
Reverberation Time	1.7 sec	0.5 sec	1.1 sec	0.7 sec
RT Improvement	–	71%	35%	59%
SPL Reduction	–	-3.7 dB	-2.7 dB	-3.7 dB

* 1.33 Sabins/SF achieved using infill panel item 8200T10

Sound Absorption Comparison

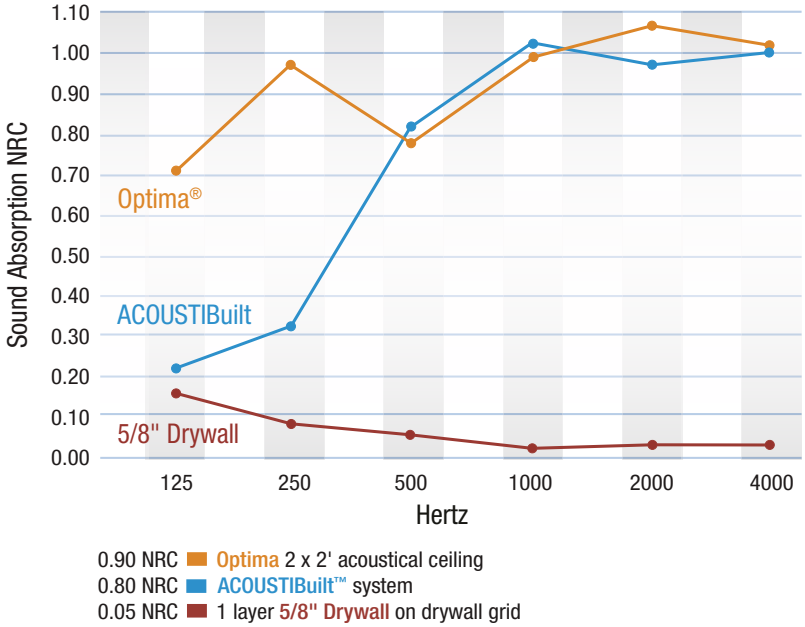

0.90 NRC Optima 2 x 2' acoustical ceiling
0.80 NRC ACOUSTIBuilt™ system
0.05 NRC 1 layer 5/8" Drywall on drywall grid

Installed Cost Comparison

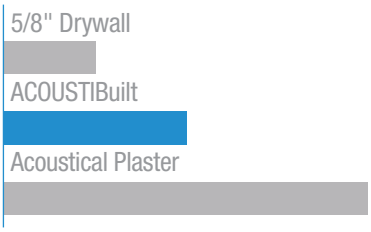

Sustain® Performance

ACOUSTIBuilt™ is part of the Sustain portfolio which helps contribute to better spaces.

- Contributes to: LEED® v4 (including new Materials and Resources credits)
- Living Building Challenge
- WELL Building Standard™
- Have Health Product Declarations (HPDs) which tell you what's in the products
- Are free of Red List chemicals per Living Building Challenge
- Have Declare® labels - easy reference "nutrition labels"
- Greenguard® Gold Certified and meets California Department of Public Health (CDPH) low emissions standards
- Have Environmental Product Declarations (EPDs) which tell you the impact of the products
- USDA BioBased certification
- Fitwel® building standard

mindful MATERIALS

USDA CERTIFIED BIOBASED PRODUCT
PRODUCT 95%

SUSTAIN®
High Performance
Sustainable Ceiling Systems
(White Only)

Declare.

GREENGUARD
Gold Certified

▼ ACOUSTIBuilt™ Ceiling and Wall Panels

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

System Overview

The ACOUSTIBuilt™ seamless acoustical ceiling system looks like and installs like drywall but has been engineered to absorb and block sound using an acoustically transparent fine texture finish that is applied in layers to allow sound to pass through and be absorbed by the mineral fiber ACOUSTIBuilt panels. The ACOUSTIBuilt panels are screw attached to standard Armstrong® Drywall Grid System, then joints are finished just like drywall. Glue and screw to existing drywall on walls above 7 feet.

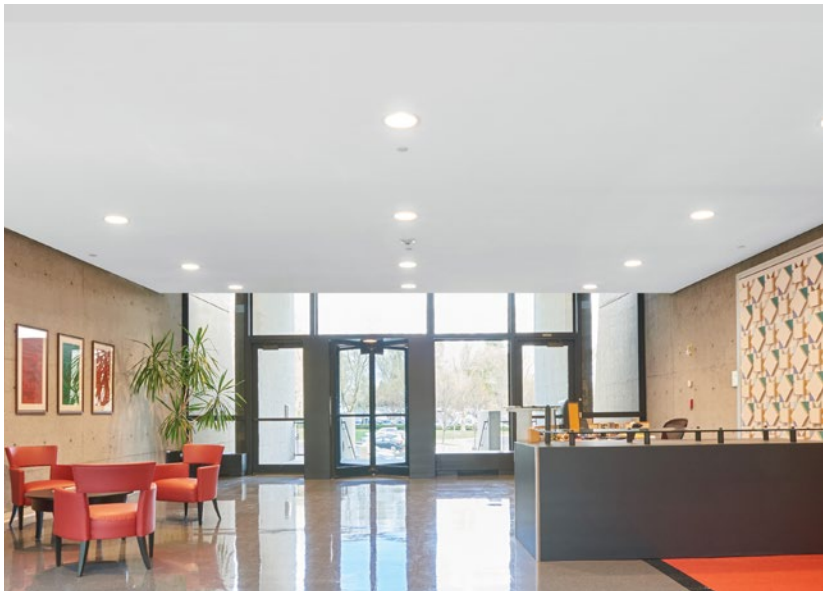

▲ ACOUSTIBuilt™ Ceiling System; Armstrong Ceilings, Lancaster, PA

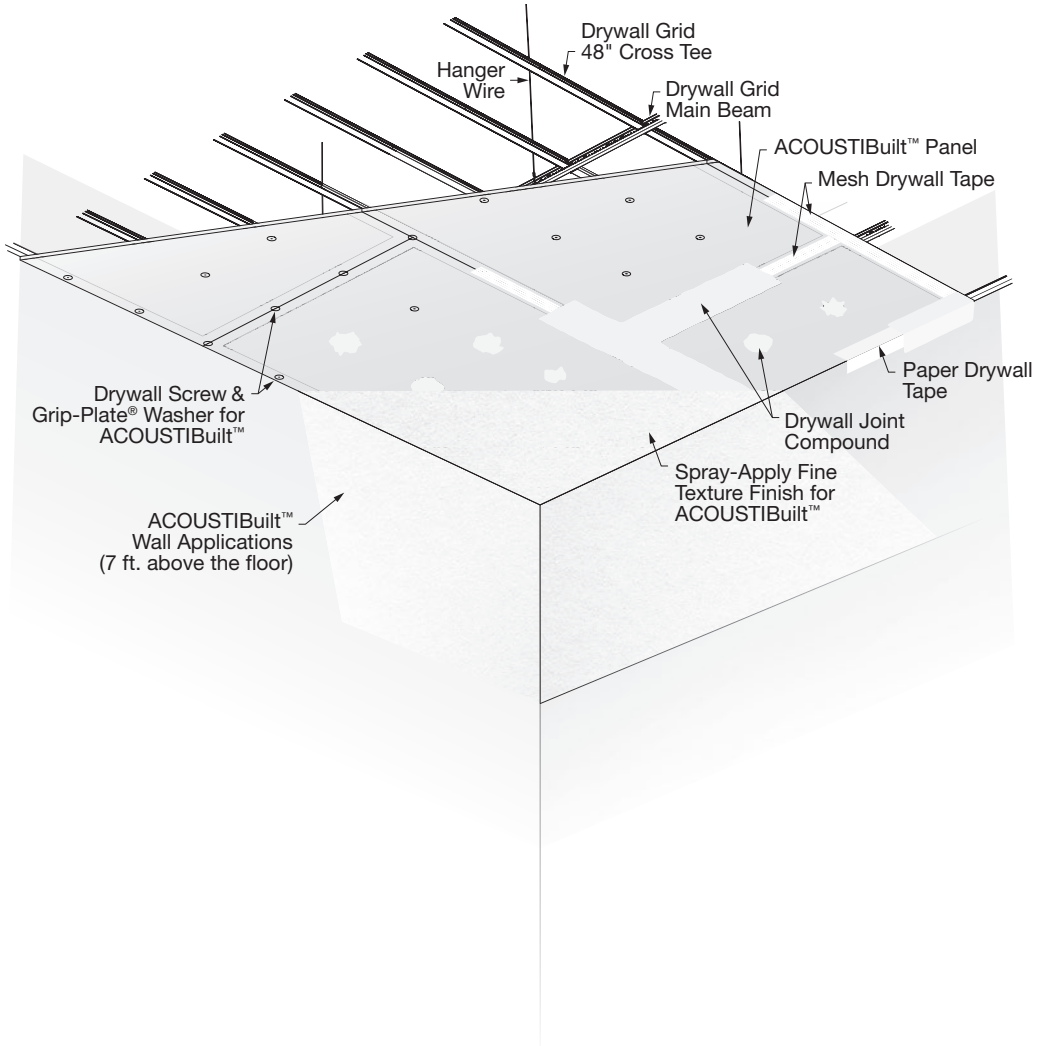

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

The typical system layout below shows a standard wall-to-wall ceiling application of ACOUSTIBuilt™.

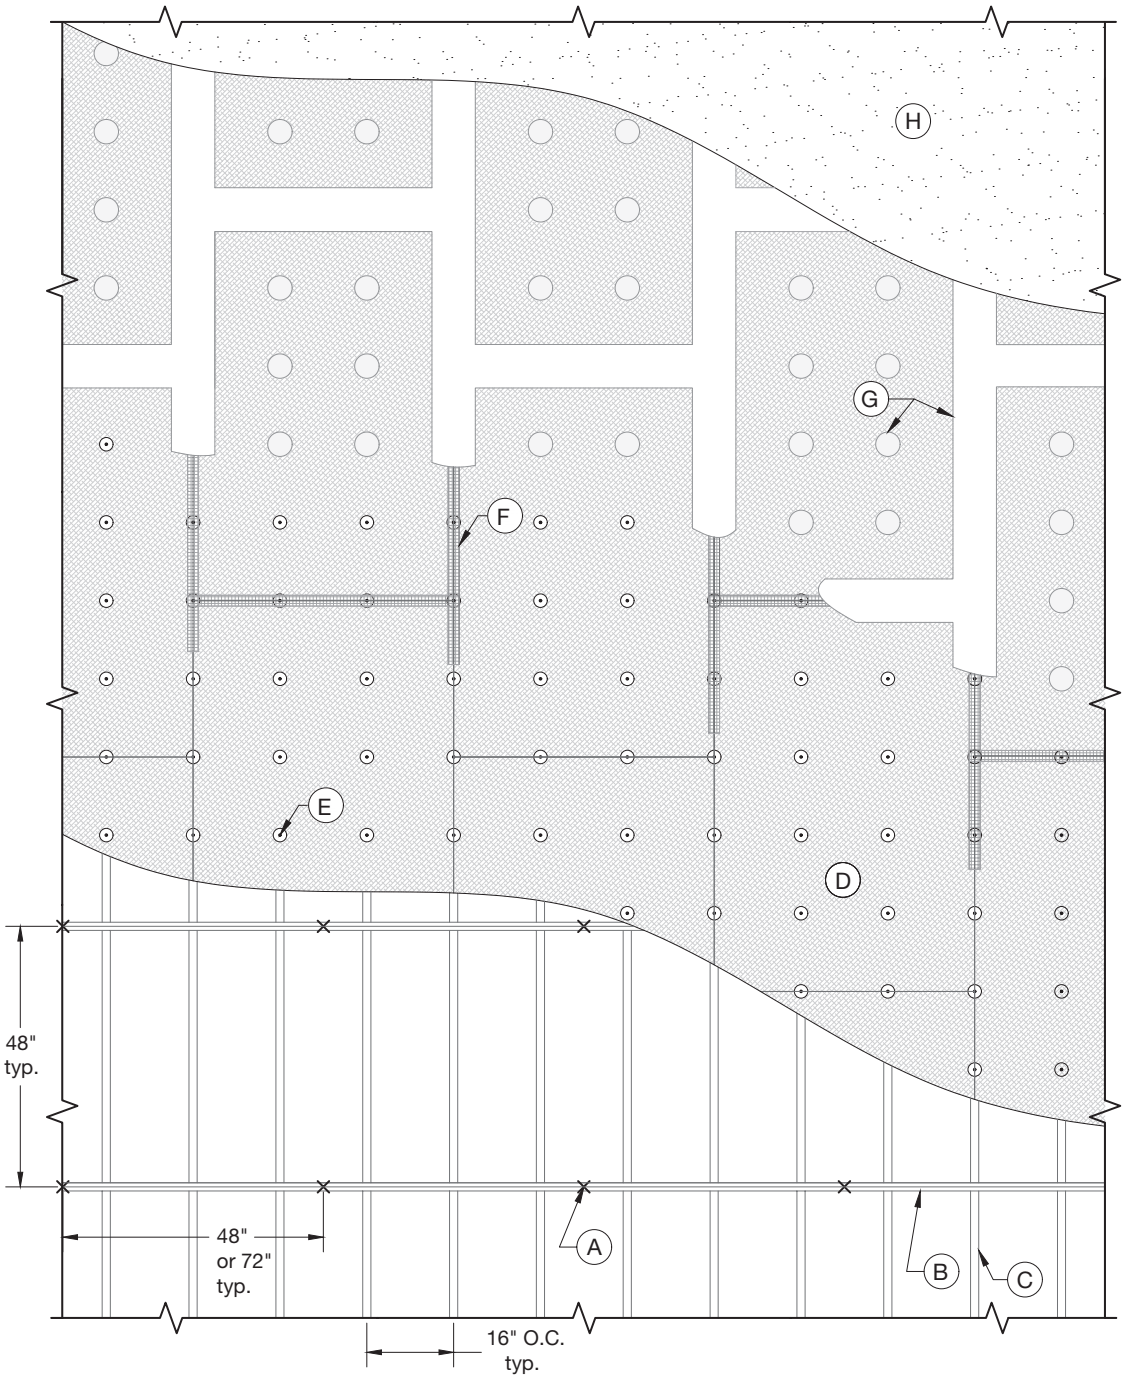

(A) × 12 Gauge hanger wire

(B) Main beam

(C) Cross tee

(D) ACOUSTIBuilt™ Panel

(E) Grip-Plate® Washer

(F) Mesh tape

(G) Joint Compound

(H) Fine Texture Finish for ACOUSTIBuilt™ Panels

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Design Considerations

Applications – The ACOUSTIBuilt™ ceiling and wall system can be used in almost any application where standard drywall is used, including wall applications (above 7' feet), flat, sloped, soffit or cloud ceiling applications. AcoustiBuilt is seismic D, E, F tested and approved. AcoustiBuilt cannot be installed in curved ceiling applications.

Color – The ACOUSTIBuilt Fine-Texture finish in White has a light reflectance value (LR) of 0.87. Custom Off-White tints are available to coordinate with your design palette. Due to the fine-texture visual, color may appear slightly different than a standard flat color sample. Choose light color tones with an LRV (light reflectance value) of 70 or greater.

Lighting – ACOUSTIBuilt is intended for spaces desiring a Level 4 equivalent drywall finish. Like Level 4 drywall, critical or low-angle light grazing across the ceiling can show imperfections. Special attention to finishing and sanding may be required. Downlights can complement the appearance in severe grazing light.

Acoustical Performance – Excessive ceiling integrations and/or small enclosed spaces where the ceiling is more compound than open area will result in degradation of sound absorption. Light tone colors may require an additional coat of Fine-Texture Finish, resulting in a slight degradation of sound absorption.

▲ ACOUSTIBuilt™ Ceiling System; Parker Poe, Charlotte, NC

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Design Details and Integration

ACOUSTIBuilt™ installed on Armstrong® Drywall Grid installed in ceiling applications offers comparable compatibility to standard drywall and easily accommodates a wide variety of conventional and Armstrong partner light fixtures, HVAC diffusers, and access doors, and transitions to standard acoustical ceiling systems. The ACOUSTIBuilt Fine Texture finish can be used to coat most GRG or metal access panels/doors in order to maintain a consistent finished ceiling visual.

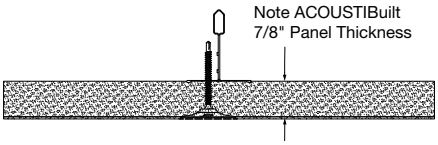

▲ ACOUSTIBuilt™ Ceiling System; SpinaORourke & Partners, West Palm Beach, FL

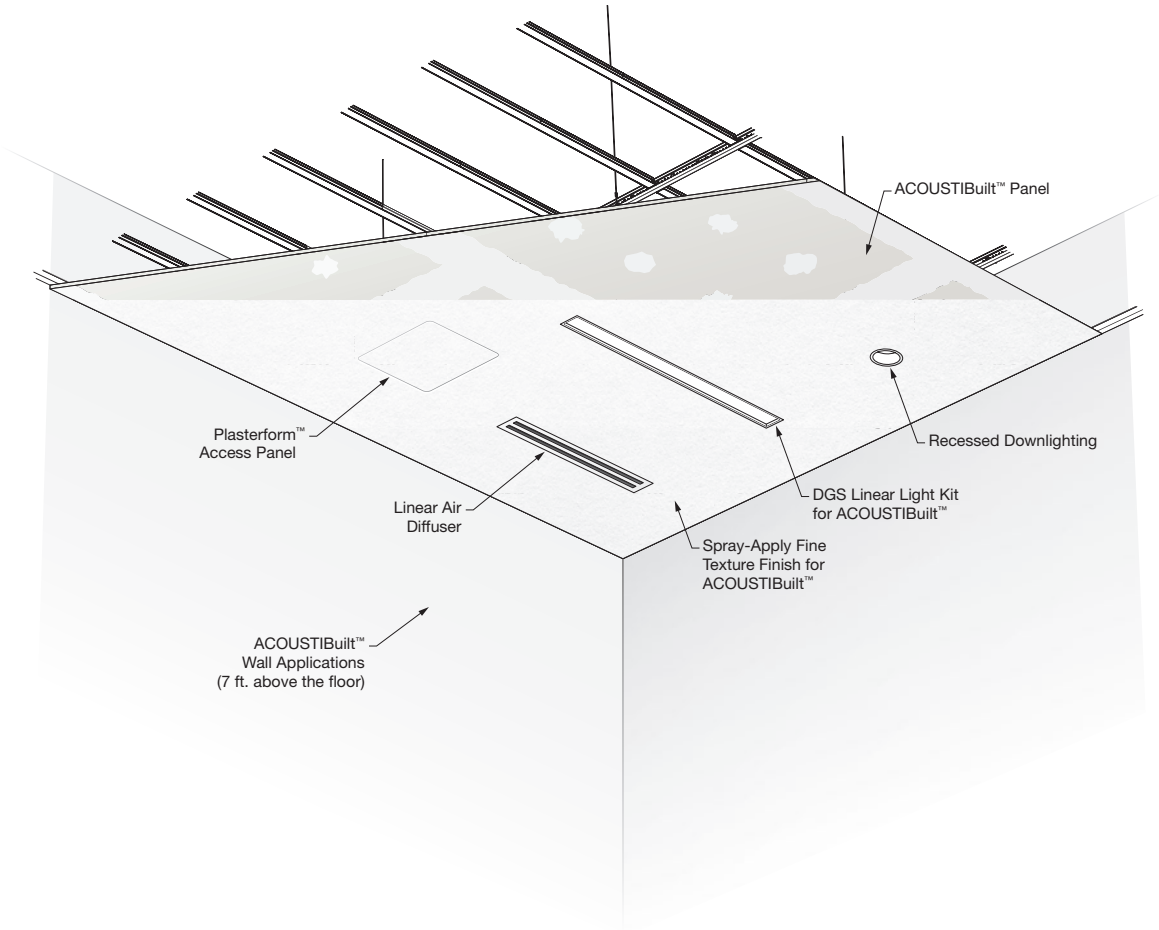

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Typical Details

ACOUSTIBuilt™ No Reveal at Wall

(Per ASTM C480, Section 20, ceilings without perimeter relief cannot exceed 30 LF and 900 SF between control joints)

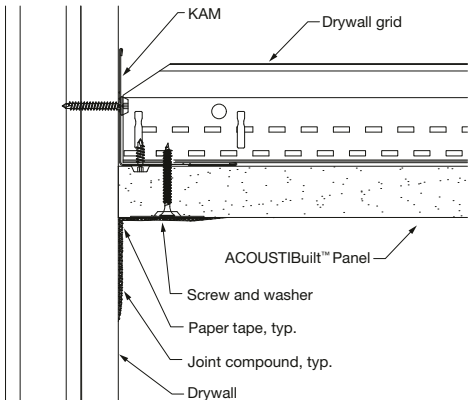

ACOUSTIBuilt Reveal at Wall

(Per ASTM C480, section 20, ceilings with perimeter relief cannot exceed 50 ln. ft. and 2,500 sq. ft. between control joints)

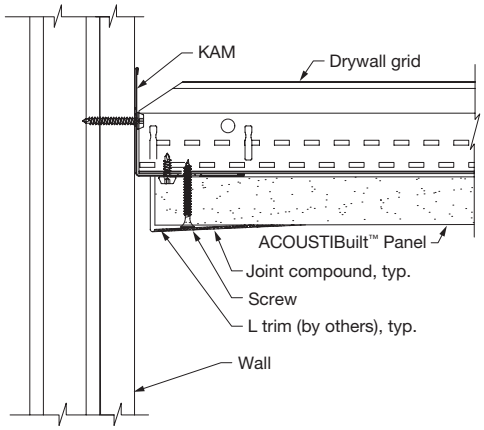

Expansion Joint

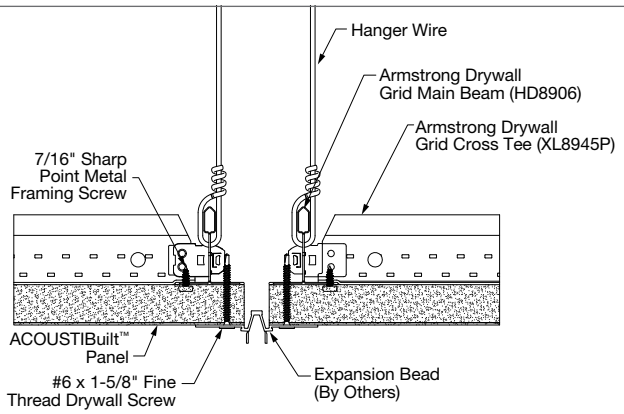

Control Joint

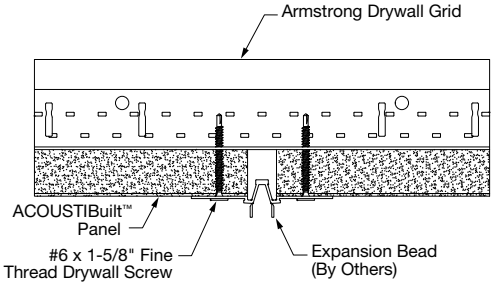

Download ACOUSTIBuilt Drawing Details Library >

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Floating Edge Details

Axiom® One Piece Trim

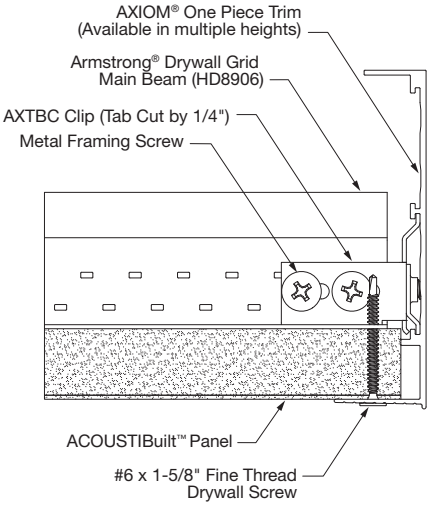

Axiom Classic with Axiom Bottom Trim for ACOUSTIBuilt™

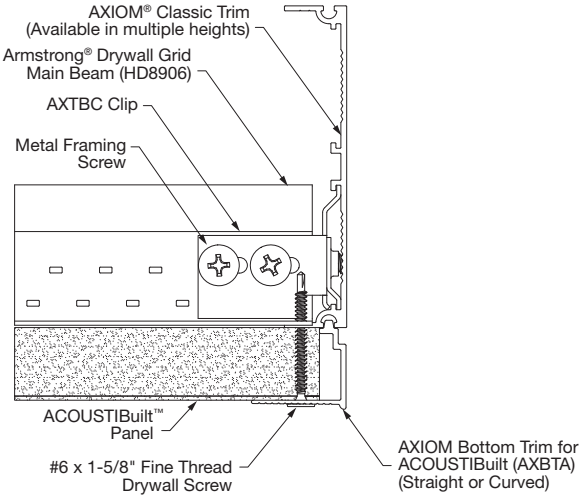

Axiom Angled Knife Edge® Trim

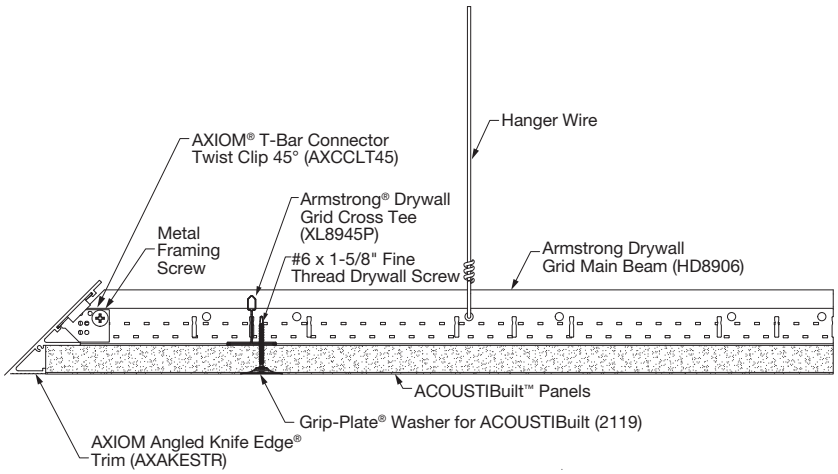

Download ACOUSTIBuilt Drawing Details Library >

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Common Integration Details

ACOUSTIBuilt™ Sprinkler Integration

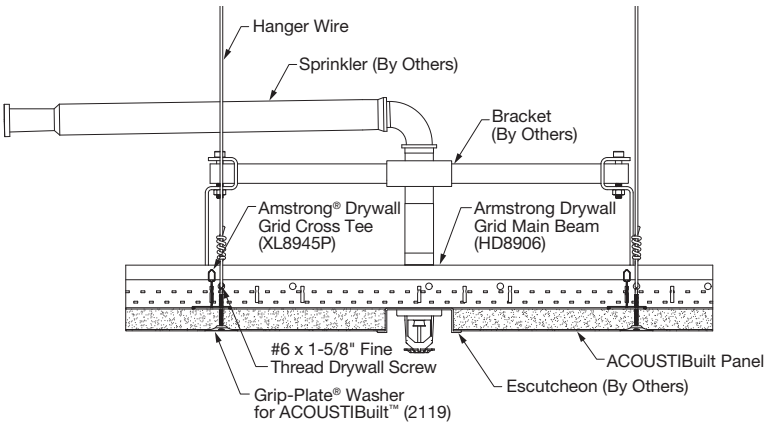

ACOUSTIBuilt with Plasterform™ GRG Access Panel

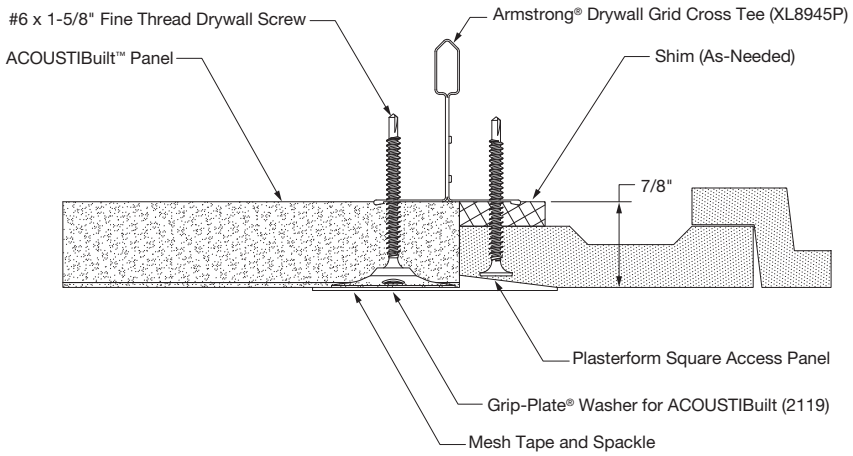

ACOUSTIBuilt with Axiom® Shade Pocket

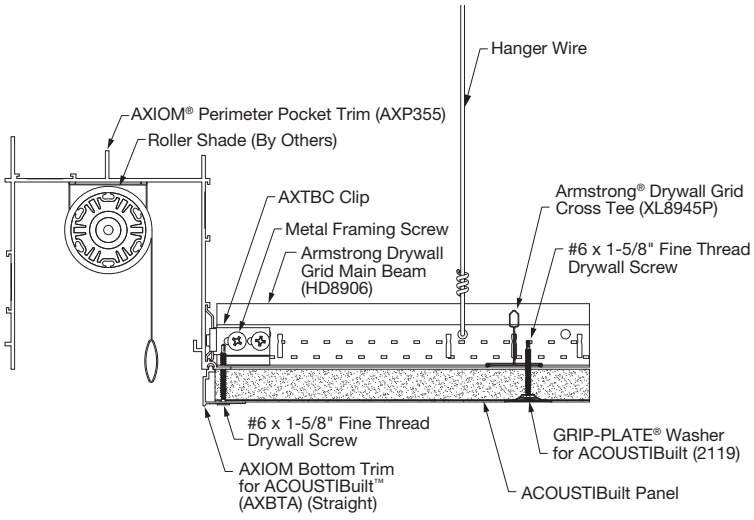

Download ACOUSTIBuilt Drawing Details Library >

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Lighting Integration Details

Axiom® Linear Lighting Kit for ACOUSTIBuilt™ (Trimless)

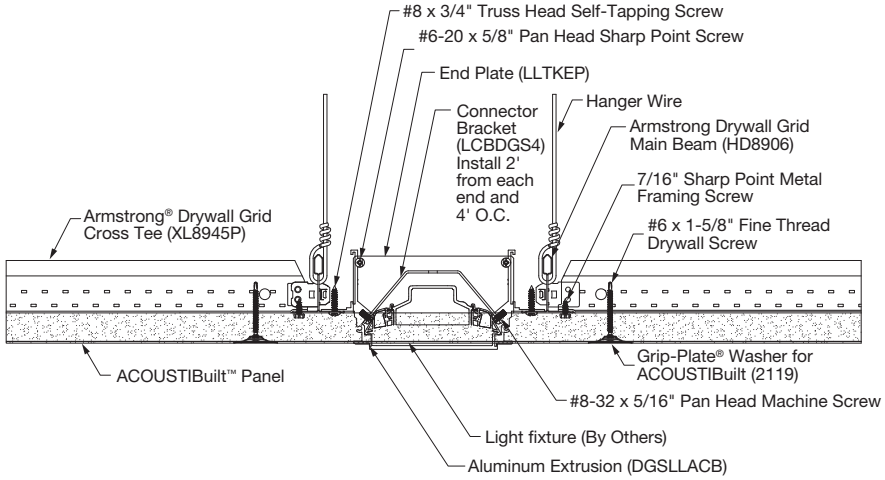

Downlighting Integration

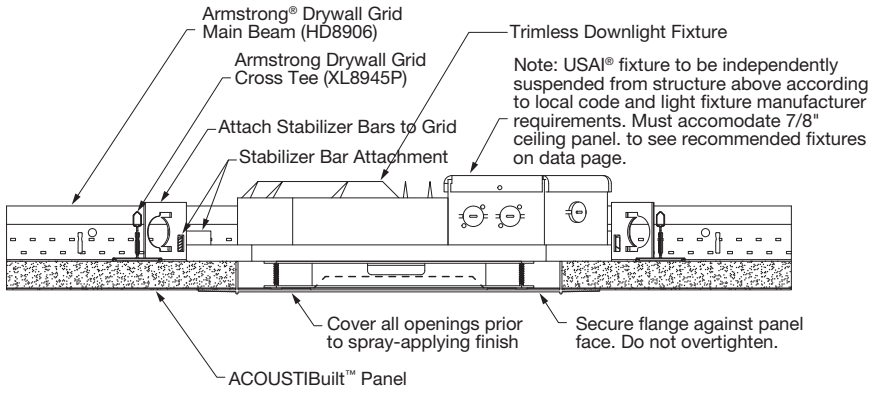

Axiom® Indirect Field Light Cove (Straight or Curved)

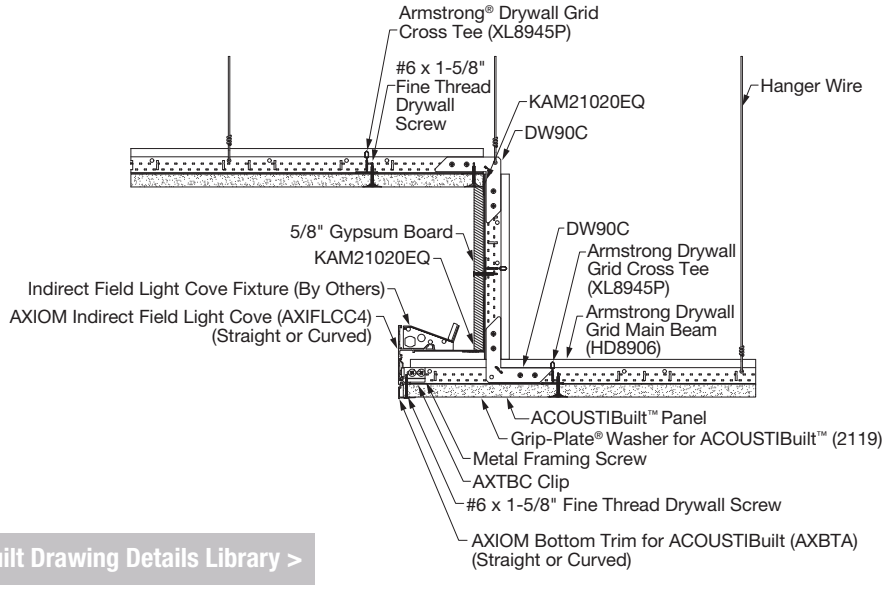

Download ACOUSTIBuilt Drawing Details Library >

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Typical Details

Flush Transition – ACOUSTIBuilt™ to 5/8" Drywall

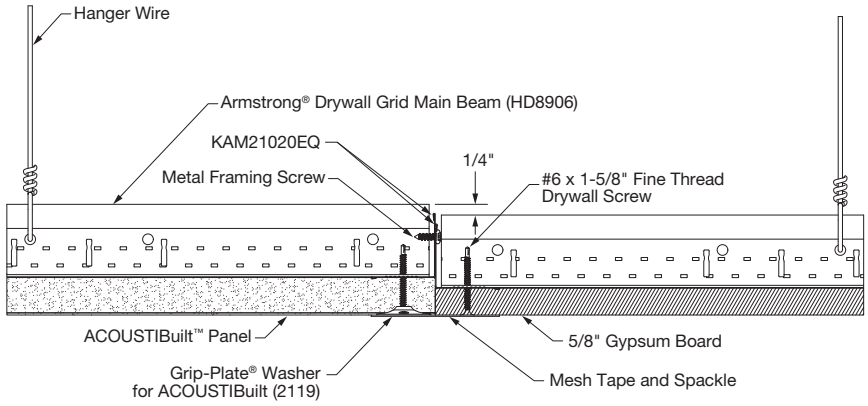

Flush Transition – ACOUSTIBuilt to 15/16" Acoustical Ceiling

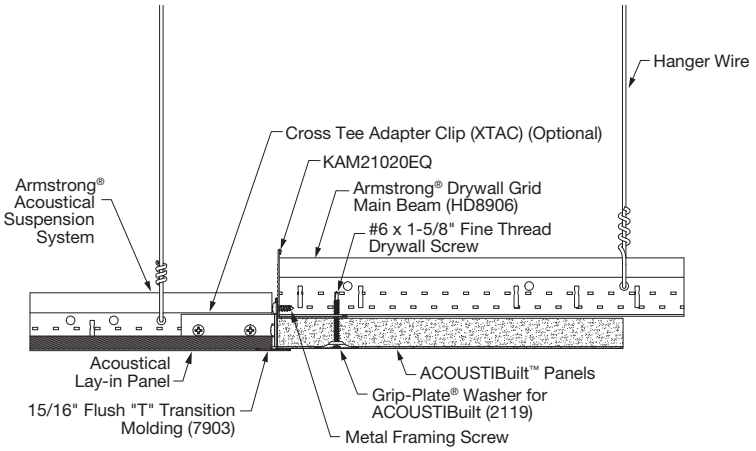

Axiom® Transition – ACOUSTIBuilt to Acoustical Ceiling

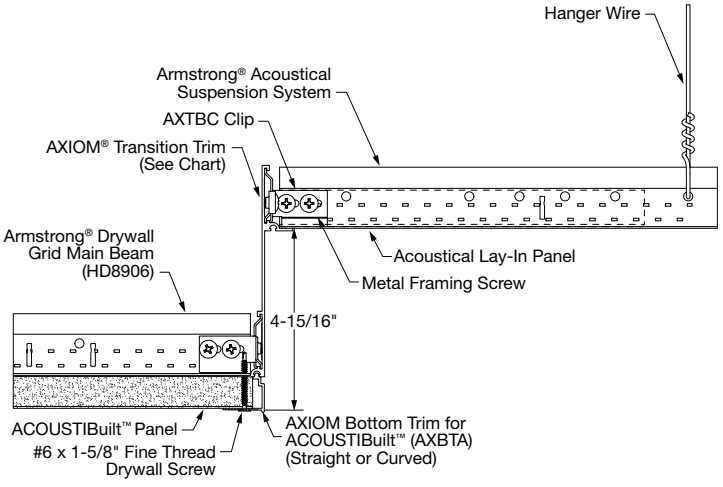

Download ACOUSTIBuilt Drawing Details Library >

ACOUSTIBuilt™ Seamless Acoustical Ceiling & Wall System

Wall Details

ACOUSTIBuilt™ Wall Finished to Acoustibuilt Ceiling

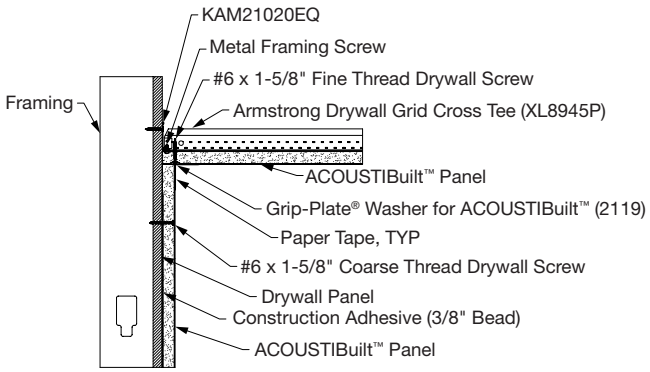

ACOUSTIBuilt™ Wall Finished to Drywall Ceiling

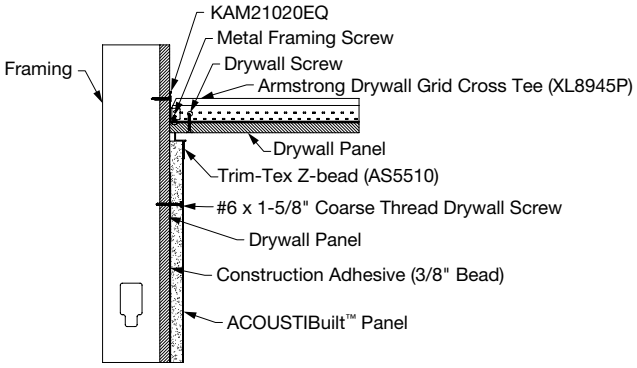

ACOUSTIBuilt™ Wall Reveal Flush to Drywall

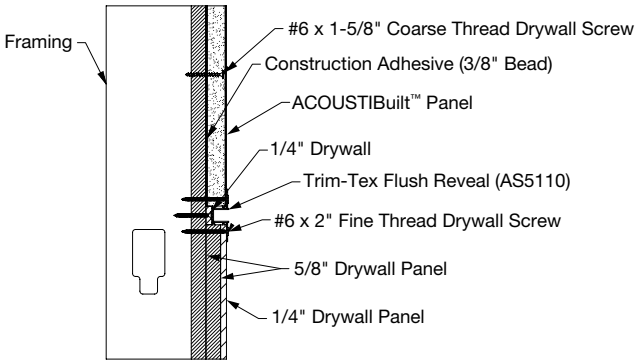

ACOUSTIBuilt™ Wall – Step to Drywall with 7/8" L-Bead

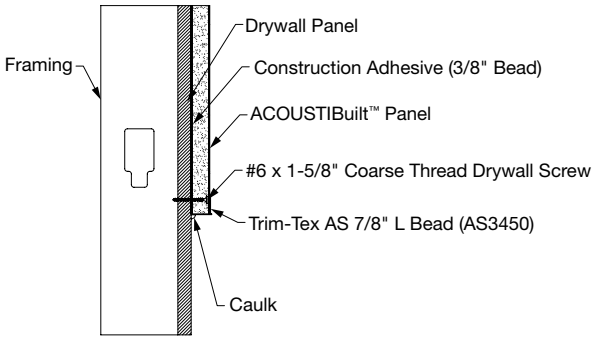

Download ACOUSTIBuilt Drawing Details Library >

▲ ACOUSTIBuilt™ Ceiling System; SpinaORourke & Partners, West Palm Beach, FL

ACOUSTIBuilt™

Seamless Acoustical Ceiling and Wall System
fine texture

TOTAL ACOUSTICS®
Sound Absorption (NRC)
+ Sound Blocking (CAC)

SUSTAIN®
High Performance
Sustainable
Ceiling Systems
(white only)

▲ ACOUSTIBuilt™ Seamless Acoustical Ceiling System

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

plus capabilities to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

New seamless acoustical ceiling and wall system that looks like drywall, but offers the performance of Total Acoustics®.

KEY SELECTION ATTRIBUTES

- Look of drywall in a seamless acoustical ceiling and wall system (install on walls above 7 feet to prevent damage)
- Get total noise control and floor plan versatility with Total Acoustics® ceiling panel options: NRC + CAC = Total Acoustics performance
- Finished White ACOUSTIBuilt™ panels are part of the Sustain® portfolio and meet the most stringent sustainability compliance standards today
- Smooth non-directional, monolithic, drywall-like visual
- Add a hint of color, tailored to your design palette
- Quick, easy panel installation using Armstrong® Drywall Grid
- Install on Armstrong® Drywall Grid Systems:
  - DGS in any room any size flat or sloped
  - Short Span in corridors up to 8'6" with no wires
  - Short Span in rooms up to 17'0" with one StrongBack in the middle
- Similar installation and finishing methods to drywall ceilings
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Mold and mildew-resistant surface
- ACOUSTIBuilt™ is intended for spaces desiring a Level 4 equivalent drywall finish
- Easier to install than acoustical plaster at a lower cost
- Can be installed with most drywall-compatible light fixtures including those from our partners:
  - Axis
  - XAL
  - USAI
  - Price
- Improves STC of interior stud/drywall partition systems by up to 6 points*

TYPICAL APPLICATIONS

- Offices
- Lobbies
- Education
- Exposed Structure
- Retail
- Hospitality
- Cloud Applications

FINE TEXTURE FINISH FOR ACOUSTIBuilt™ PANELS

White
(WH)

COLOR TINTS OF YOUR CHOICE

Available in any light color tone!

NOTE: Custom color tints should have an LRV (Light Reflectance Value) of 70 or greater.

ACOUSTIBuilt™

Seamless Acoustical Ceiling and Wall System
fine texture

USDA CERTIFIED BIOBASED PRODUCT PRODUCT 98%

Declare.

SUSTAIN® High Performance Sustainable Ceiling Systems (white only)

GREENGUARD Gold Certified (details below)

LEED® | WELL™ | LBC

UP TO 75% RECYCLED CONTENT

Calculate sustainability with GreenGenie™ armstrongceilings.com/greengenie

energy management; construction waste mgmt; regional materials ▲ LOCATION DEPENDENT; design for flexibility; EPD; recyclable/ extended producer resp.; biobased materials; recycled content; sourcing of raw materials; material ingredient reporting; low emitting/ materials; lighting quality; acoustics

VISUAL SELECTION

	Item No.	Dimensions (Inches)	
ACOUSTIBUILT™ CEILING AND WALL PANELS	**2604**	48 x 72 x 7/8"	

7/8" Tapered Edge



PERFORMANCE SELECTION

Dots represent high level of performance (panel and grid).

UL Classified Acoustics (NRC + CAC)	Total Acoustics[1] (NRC + CAC)	Fire Performance	Light Reflect	Bio-Block Anti-Mold/ Mildew	Humi-Guard+ Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels: Fog	CleanAssure™ Disinfectable Panels: Spray	DURABILITY: Wash	DURABILITY: Scratch	DURABILITY: Soil	Recycle Program	10-Yr Warranty
0.80** •	46 •	Class A	0.87*	•	•	•	•	•	N/A	N/A	N/A	N/A	•

[1] Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound-blocking in one product.
* White Fine Texture Finish panel performance following the installation instructions.
** Per ASTM C423 & E795, E-400 Mounting

WALL-TO-WALL ASSEMBLY AND INSTALLATION OVERVIEW

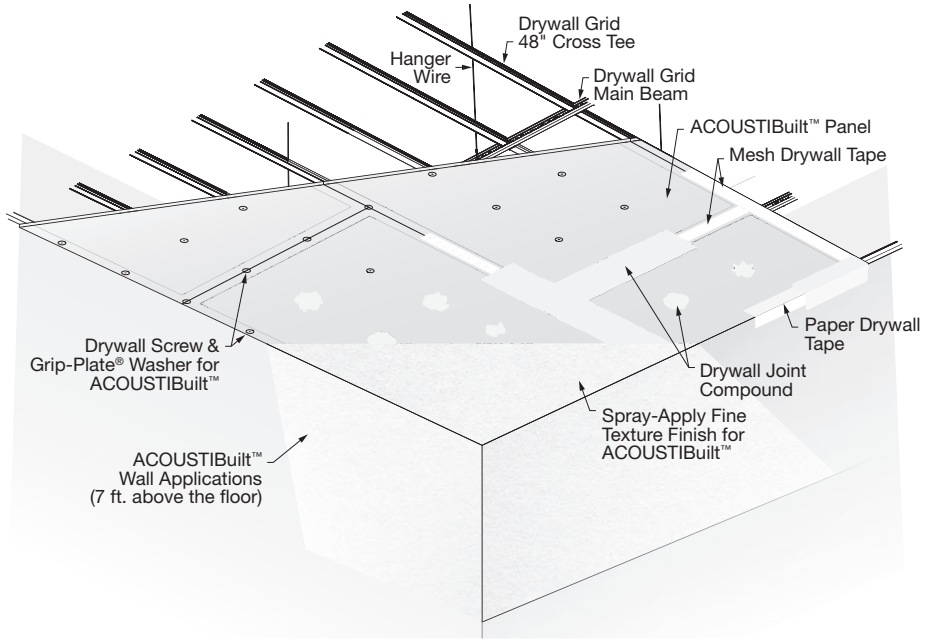

ACOUSTICAL INFORMATION

Mounting Method

	Sabins/SF
Cloud	0.80
Cloud w/ infill 8200T10	1.33

STC Rating*

1 Side	2 Sides
0.42 •	0.43 •

* 3-5/8" metal studs with one layer of 5/8" drywall on both sides and AcoustiBuilt Panels on one or both sides.

PHYSICAL DATA

Material
Wet-formed mineral fiber

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread of 25 or less. Smoke Developed of 50 or less.

ASTM E1264 Classification
Type IV, Form 2, Pattern G
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with White Fine Texture Finish offer BioBlock® performance and resist the growth of mold and mildew on the tile surface.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

VOC Emissions
GREENGUARD Gold Certified
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818

GREENGUARD GOLD

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol

Design and Lighting Considerations
ACOUSTIBuilt™ is intended for spaces desiring a Level 4 equivalent drywall finish. Critical lighting conditions such as grazing or side light are important to consider while specifying as they can accentuate any imperfections or visible joints.

Lighting and diffuser fixtures must be able to accommodate 7/8" thick panels. Contact the lighting and diffuser manufacturers for recommended fixture use and integration. ACOUSTIBuilt™ is a non-accessible ceiling. Access panels can be integrated, as needed, following standard installation practices. Refer to access panel manufacturer to verify compatibility with 7/8" thick panels.

Acoustical Considerations
When installed as a cloud, average sound absorption is 0.80 Sabins/SF. The addition of acoustical infill panel item 8200T10 can increase sound absorption up to 1.33 Sabins/SF. Excessive integrations and/or small enclosed spaces where the ceiling is more compound than open area will result in degradation of sound absorption. Certain lighting conditions and/or colors may require an additional coat of Fine Texture Finish, resulting in a degradation of sound absorption. ACOUSTIBuilt™ panels absorb the most sound when installed as full panels. Plan the layout to minimize panel joints and fixture integrations which cover the surface of the ceiling.

Insulation Value
R Factor – 2.2 (BTU Units)
R Factor – 0.39 (Watts Units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

10-Year Panel Warranty
Details at armstrongceilings.com/acoustibuilt

Weight; Square Feet/Carton
2604 – 1.1lbs/SF; 240 SF/ctn

Minimum Order Quantity
1 carton (10pcs)

ACOUSTIBuilt™

Seamless Acoustical Ceiling and Wall System
fine texture

USDA CERTIFIED BIOBASED PRODUCT PRODUCT 98%

Declare.

SUSTAIN® High Performance Sustainable Ceiling Systems (white only)

GREENGUARD Gold Certified (details below)

LEED® | WELL™ | LBC

UP TO 75% RECYCLED CONTENT

Calculate sustainability with GreenGenie™ armstrongceilings.com/greengenie

energy management; construction waste mgmt; regional materials; design for flexibility; EPD; recyclable/ extended producer resp.; biobased materials; recycled content; sourcing of raw materials; material ingredient reporting; low emitting/ materials; lighting quality; acoustics

▲ LOCATION DEPENDENT

SUSPENSION SYSTEMS – Order Separately

Item No.		Description	Required for Install	Qty/Ctn
HD8906		12' HD Drywall Main Beam	Yes	12/144
XL8945P		4' Drywall Cross Tee	Based on layout	36/144
XL8965		6' Drywall Cross Tee	Based on layout	36/216
KAM21020		2 x 2 x 120" Knurled Angle Molding (0.033" metal thickness)	Based on layout	10/100
S7708P		8' ShortSpan® Tee	N/A	12/96
S7710P		10' ShortSpan Tee	N/A	
S7712P		12' ShortSpan Tee	N/A	
S7714P		14' ShortSpan Tee	N/A	
7891		12 gauge hanger wires 144" length	N/A	140 pcs

PERIMETER TRIM OPTIONS – Order Separately

Item No.		Description	Required for Install
AX1PC_STR **AX1PC_CUR**		Axiom® One-Piece Drywall Trim available for 4" and 6" heights – straight or curved	Based on layout
Axiom Classic: **AX_STR** **AX_CUR** Axiom Bottom Trim: **AXBTASTR** **AXBTACUR**		Axiom Classic Trim available in 2" to 16" heights (2" increments – straight or curved) with Axiom Bottom Trim for ACOUSTIBuilt™	Based on layout Axiom Bottom Trim is required to use Axiom Classic and select Axiom Trims with ACOUSTIBuilt
		See Axiom Data Page for clips and accessories needed to install Axiom trim shown above.	
Straight: **AXAKEACBSTR** Inside Corner: **AXAKEACBIC** Outside Corner: **AXAKEACBOC**		Axiom® Angled Knife Edge® Trim for ACOUSTIBuilt – Inside or Outside Corner	Based on layout

PLASTERFORM™ (GRG) ACCESS PANELS

Item No.		Description
PF-15030B		30" x 30" Rounded Corner Access Panel
PF-15024B		24" x 24" Rounded Corner Access Panel
PF-15018B		18" x 18" Rounded Corner Access Panel

See more Plasterform Access Panel options at: armstrongceilings.com/plasterform

PAINT AND WASHERS – Order Separately

Item No.		Description	Required for Install
2605WH		Fine Texture Finish for ACOUSTIBuilt™ Panels (available in white and custom off-white tints)	For every 10 panels (240 SF) - order 1 pail (4 gal.)
2119		Grip-Plate® Washers for ACOUSTIBuilt™ Panels (1-1/4" diameter)	For every 10 panels (240 SF) – order 1 bag (250 pcs)

Washers are not required for wall applications. See installation instructions for complete details.

STANDARD ACCESSORIES BY OTHERS – Order Separately

Item No.		Description	Required for Install
Screws		# 6 x 1-5/8" fine thread, corrosion resistant drywall screws # 6 x 1-5/8" coarse thread drywall screws (Used for Wall Installations)	Yes
Setting-Type Compound		Drywall joint compound	Yes
Adhesive (For Wall Installations)		Loctite® PL Premium® Polyurethane Construction Adhesive or OSI® F38 Drywall Panel Adhesive	Yes

Item No.		Description	Required for Install
Drying-Type Compound		Pre-mixed ultra lightweight drywall joint compound	Yes
Tape		Self-adhesive mesh drywall joint tape	Yes
Paper Tape		Paper drywall tape (For Corners)	Yes

ACOUSTIBuilt™

Seamless Acoustical Ceiling and Wall System
fine texture

USDA CERTIFIED BIOBASED PRODUCT PRODUCT 98%

Declare.

SUSTAIN® High Performance Sustainable Ceiling Systems (white only)

GREENGUARD Gold Certified (details below)

LEED® WELL™ | LBC

UP TO 75% RECYCLED CONTENT

Calculate sustainability with GreenGenie™ armstrongceilings.com/greengenie

energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/ extended producer resp.	biobased materials	recycled content	sourcing of raw materials	material ingredient reporting	low emitting/ materials	lighting quality	acoustics
✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓

▲ LOCATION DEPENDENT

VISUAL SELECTION

Item No.	Description	Fixture Length
DGSLLACBTK24	24" Linear Light Trim Kit	24" x 4"
DGSLLACBTK30	30" Linear Light Trim Kit	30" x 4"
DGSLLACBTK48	48" Linear Light Trim Kit	48" x 4"
DGSLLACBTK60	60" Linear Light Trim Kit	60" x 4"
DGSLLACBTK72	72" Linear Light Trim Kit	72" x 4"
DGSLLACBTK90	90" Linear Light Trim Kit	90" x 4"
DGSLLACBTK96	96" Linear Light Trim Kit	96" x 4"
DGSLLACBTK120	120" Linear Light Trim Kit	120" x 4"
DGSLLACBTKCON	120" Continuous Linear Light Trim Kit	120" x 4"

Linear Light Trim Kits designed to work with 7/8" thick AcoustiBuilt panels

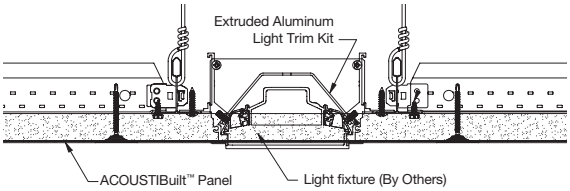

Seamless integration between ACOUSTIBuilt™ and linear lighting for consistent fit and finish.

- Leverage linear lighting in long runs to create a monolithic look
- Faster and easier to build and install compared to traditional framed linear lighting
- Light fixture installs from below ceiling to optimize ceiling heights
- Comes in pre-assembled kits
- Compatible with select Axis and XAL Lighting

For compatible lighting details visit: axislighting.com or XALusa.com

LIGHTING AND MEP INTEGRATION

Lighting and diffuser solutions are available through partner companies, or you can use standard modular and pendant fixtures.

LIGHTING PARTNERS

axis USAI Lighting XAL

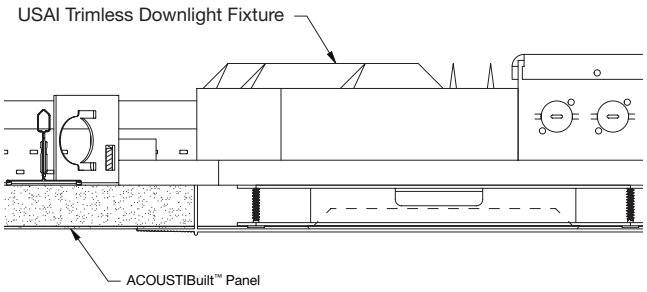

Additional options include standard industry lighting that complements the module size, or pendant fixtures that hang below the ceiling system.

MEP PARTNERS

price

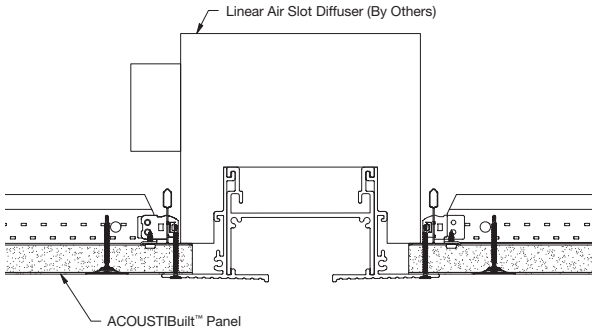

FLEXHEAD

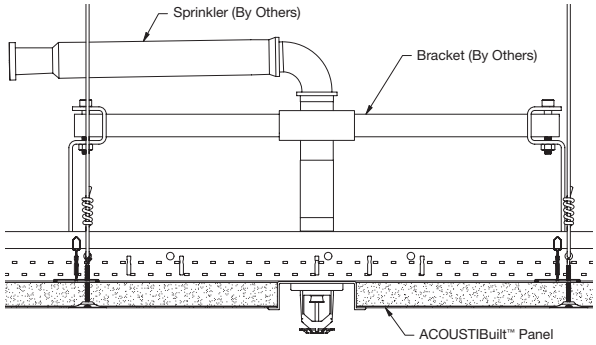

TAKE THE NEXT STEP

1 877 276 7876

Customer Service Representatives
7:45 a.m. to 5:00 p.m. EST
Monday through Friday

TechLine – Technical information, detail drawings, CAD design assistance, installation information, other technical services – 8:00 a.m. to 5:30 p.m. EST, Monday through Friday. FAX 1 800 572 8324 or email: techline@armstrongceilings.com

armstrongceilings.com/commercial

Latest product news

Standard and custom product information

Online catalog

CAD, Revit®, SketchUp® files

A Ceiling for Every Space® Visual Selection Tool

Product literature and samples – express service or regular delivery

Contacts – reps, where to buy, who will install

YOU INSPIRE™ SOLUTIONS CENTER

1 800 988 2585
email: solutionscenter@armstrongceilings.com
armstrongceilings.com/youinspire

Design Assistance

Collaborative design

Detail drawings

Specifications

Planning and budgeting

Pre-construction Assistance

Layout drawings for standard and premium products

Project installation recommendations

Contractor installation assistance

you inspire™
solutions center

helping to bring your one-of-a-kind ideas to life

MIX
Paper from responsible sources
FSC® C000000

Printed on recyclable paper with vegetable-based inks. Please Recycle.

Revit® Is a trademark of Autodesk, Inc.; SketchUp® is a trademark of Trimble, Inc.; LEED® is a trademark of the U.S. Green Building Council; WELL™ and WELL Building Standard™ are trademarks of International WELL Building Institute; Declare® is a trademark of, and Living Building Challenge℠ is a service mark of The International Living Future Institute; Grip-Plate® is a trademark of Rodenhouse, Inc.; UL® is a trademark of UL, LLC.; USAI® is a trademark of USAI Lighting, LLC; FlexHead® is a trademark of Anvil International; Price® is a trademark of Price Industries Limited; Axis is owned by Axis Lighting Inc.; XAL is owned by XAL, LLC; Inspiring Great Spaces® is a trademark of AFI Licensing LLC; All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2020 AWI Licensing LLC

On the cover:
ACOUSTIBuilt™ Cloud installation
Vincennes University
Vincennes, IN

armstrongceilings.com/acoustibuilt

Inspiring Great Spaces®

Armstrong®
CEILING & WALL SOLUTIONS

BPCS-6154-1220