


TINCRAFT™

Circles, Squares & Triangles

Tegular

smooth texture

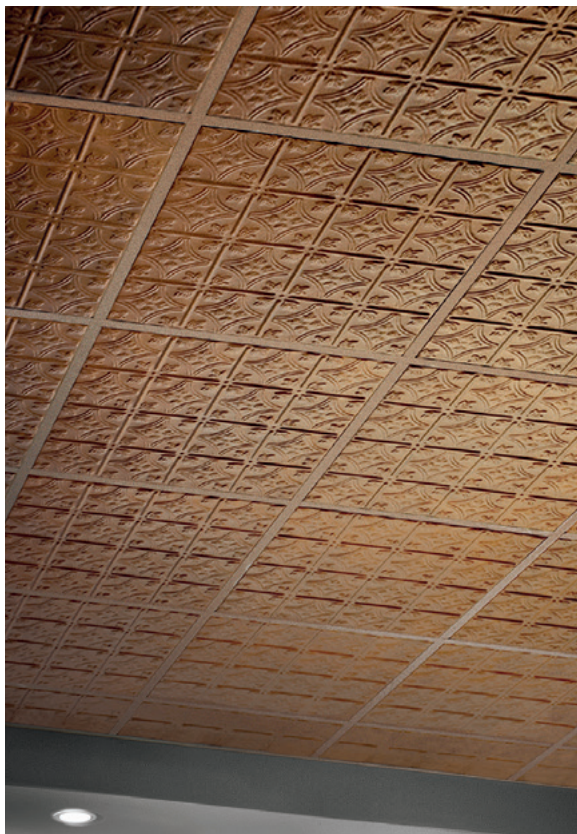

▲ Tincraft™ Squares panels with Suprafine® XL® 9/16" suspension system

▲ Tincraft™ Circles panels with Faux Coat Bronze and coordinated Prelude® XL® 15/16" suspension system

armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

The look of old-world tin ceilings with low-relief panels in classic designs and an array of standard metal colors. Offers high sound blocking.

KEY SELECTION ATTRIBUTES

- Early 20th century embossed metal look
- Affordable, practical alternative to traditional tin and metal ceilings
- Finely detailed design for upscale look
- High sound-blocking CAC 35

NOTE: Not recommended for areas requiring acoustical performance

COLORS



White (WH) Faux Coat Pewter (PW) Faux Coat Bronze (BZ) Silver (SL) Copper (CP)

Color finishes available on Tincraft™ Circles panels only. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

FACE VIEWS (1/4 of 24" x 24" panel shown)



Circles Squares Triangles

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)



1. Tincraft™ Circles
2. Tincraft™ Squares
3. Tincraft™ Triangles
4. Tincraft™ Circles with Prelude® 15/16" suspension system
5. Tincraft™ Squares with Suprafine® 9/16" suspension system
6. Tincraft™ Triangles with Suprafine® 9/16" suspension system

TINCRAFT™

Circles, Squares & Triangles
 Tegular
 smooth texture

GREENGUARD
 Gold Certified
 (details below)

LEED® WELL™ LBC

UP TO **56% RECYCLED CONTENT**

Calculate sustainability with GreenGenie™
 armstrongceilings.com/greengenie

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/pre-consumer producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

VISUAL SELECTION

armstrongceilings.com/catdwgs	Susp. Dwg.	Item No. ♦	Dimensions (Inches)
TINCRAFT™ Circles 15/16" Flush Tegular	3	8008 __	24 x 24 x 3/4"
TINCRAFT™ Squares 9/16" Flush Tegular	25	8009	24 x 24 x 3/4"
TINCRAFT™ Triangles 9/16" Flush Tegular	25	8010	24 x 24 x 3/4"

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$\$

UL Classified Acoustics	Total Acoustics ¹	Fire Performance	Light Reflect (White only)	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	Warranty
N/A	35	Class A	0.78	N/A	N/A	•	Std	Std	•	1-Yr

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
 ♦ Add 2-letter color suffix to item number when specifying or ordering (e.g., 8008 P W)



Circles Squares Triangles
 Images represent a 12" x 12" section of panel.

SUSPENSION SYSTEMS



For coordinating color, specify Prelude® XL® items 7301 main beam, XL7342, XL7328 cross tees, and 7800 wall molding with the appropriate 2-letter color suffix.

PHYSICAL DATA

Material
 Wet-formed mineral fiber

Surface Finish
 Factory-applied latex paint

Fire Performance
 Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
 Type III, Form 2, Pattern J Z
 (Classic embossed tin ceiling design)
 Fire Class A

Humidity/Sag Resistance
 Standard performance ceiling panels are recommended where the building is enclosed and the HVAC is continuously functioning.

VOC Emissions
GREENGUARD Gold Certified
 Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content
 Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
 UL.COM/GG
 UL 2818



Insulation Value
 Average R Factor – 1.6 (BTU units)
 Average R Factor – 0.28 (Watts units)

1-Year Performance Guarantee & Warranty
 Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
 8008 – 0.90 lbs/SF; 48 SF/ctn
 8009, 8010 – 1.23 lbs/SF; 32 SF/ctn

Minimum Order Quantity
 1 carton