

SOUNDSCAPES™ Blades

Linear Acoustical Wall Panels
fine texture

LEED® WELL™ LBC

71% RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/extended producer resp.
biobased materials
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

Calculate sustainability with GreenGenie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT



▲ SoundScapes™ Blades wall application

Linear acoustical panels help reduce reverberation time in your space.

KEY SELECTION ATTRIBUTES

- Direct attach to wall using Axiom® Wall Molding
- Excellent acoustical absorption – 1.38 Sabins/SF
- Integrated hardware
- Custom panel options available

INSTALLATION OPTIONS

	Item No. ♦	Description	Pieces/Carton
Direct-Attach with AXIOM® Wall Molding	AXM34STR3	Straight Wall Molding – Shadow 10'	360 (Paint Recommended; order by the piece)

♦ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. 7301B L)

COLORS Due to printing limitations, shade may vary from actual product.

Standard


White (WH) Shell (SH) Pale Lemon (LM) Pecan (PC) Sky (SK) Moss (MS) Stone (SE) Reef (RE) Lagoon (LA) Plum (PM) Cranberry (CN) Kiwi (KW) Tangerine (TG) Black (BK) Custom Colors Available

For premium and custom capabilities, contact TechLine at 877 276-7876. Coordinating Calla® and Lyra® DESIGNFlex® panel colors available!

INSTALLATION OPTIONS

	Item No. ♦	Description	Pieces/Carton
Direct-Attach with AXIOM® Wall Molding	AXM34STR3	Straight Wall Molding – Shadow 10'	(360° Paint Recommended; order by the piece)

♦ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 B K)

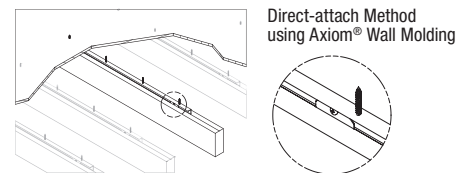

PHYSICAL DATA

Material
2" thick fiberglass with DuraBrite® scrim on face and sides.

Surface Finish
DuraBrite scrim with factory-applied paint on face and sides. Standard White has energy-saving, high light-reflective finish (LR 0.90). Top of panel is unfinished with embedded hanging clips.

Fire Performance
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

SoundScapes Blades panels, as with other architectural features located in the ceiling plane, may obstruct or skew the existing or planned fire sprinkler water distribution pattern, or possibly delay the activation of the fire sprinkler or fire detection system. Consult a fire protection engineer, NFPA 13, and local codes for guidance on the proper installation techniques where fire detection or suppression systems are present.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart. Deflection up to 1/8" has been documented in some cases.

Special care in installation and handling must be taken with color panels to avoid surface damage to the paint finish. Custom colors are available.

5" SoundScapes Blades can now be used on walls, but are not recommended for use in high-traffic or high-impact areas. For best results, install above 6" from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

Seismic Restraint
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

Recommended Suspension Systems
SoundScapes Blades panels are pre-assembled with metal hanging clips in the top of the panels. See Installation Instructions BPLA-297844 for installation details.

Warranty
Details at armstrongceilings.com/warranty

Panel Weight
Panel weights vary. Refer to SoundScapes Blades Ceilings product pages in Blades & Baffles Section

Panels/Carton
4

Minimum Order Quantity
1 carton