

# AXIOM® Trim for Drywall and ACOUSTIBuilt™ Ceiling Systems

One-piece or Two-piece straight & curved



**SUSTAIN™**  
High Performance Sustainable Ceiling Systems



**24/7 DEFEND™**  
Solutions for Healthier, Safer Spaces

CONTAIN CLEAN PROTECT

**Declare.**

LEED® WELL™ LBC

50% RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with GreenGenie™  
armstrongceilings.com/greengenie

LOCATION DEPENDENT



This pre-engineered vertical trim solution for 5/8" drywall and ACOUSTIBuilt™ ceiling systems eliminates vertical framing and provides architectural detail.

## KEY SELECTION ATTRIBUTES


- 2-1/2", 4", and 6" profile heights
- Axiom® trim is part of the Sustain™ portfolio and meets the most stringent sustainability compliance standards today
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Integrated and pre-punched tapping flange for drywall attachment
- Available in White, standard colors, and unfinished for field painting
- Straight and curved options available
- Pre-engineered compatibility with 5/8" drywall and ACOUSTIBuilt™ ceiling systems

**MINIMUM BEND RADIUS FOR AXIOM ONE-PIECE TRIM**  
Inside: 24" Minimum  
Outside: 36" Minimum

**MINIMUM BEND RADIUS FOR AXIOM TWO-PIECE TRIM**  
36" Minimum

**COLORS** Due to printing limitations, shade may vary from actual product.

## Standard



\* Colors that are pre-qualified to meet Sustain™ portfolio requirements are available upon request. Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase.

## VISUAL SELECTION

	Item No. ♦	Description
AXIOM® One-Piece Trim for Drywall	AX1PC2STR_ _	2-1/2" One-Piece Trim for Drywall – Straight
	AX1PC2CUR_ _	2-1/2" One-Piece Trim for Drywall – Curved
	AX1PC4STR_ _	4" One-Piece Trim for Drywall – Straight
	AX1PC4CUR_ _	4" One-Piece Trim for Drywall – Curved
	AX1PC6STR_ _	6" One-Piece Trim for Drywall – Straight
	AX1PC6CUR_ _	6" One-Piece Trim for Drywall – Curved
AXIOM® Two-Piece Bottom Trim for Drywall (used with AXIOM Classic)	AXBSTR_ _	Two-Piece Bottom Trim for Drywall – Straight
	AXBTCUR_ _	Two-Piece Bottom Trim for Drywall – Curved
AXIOM® Bottom Trim for ACOUSTIBuilt™ Ceiling Systems	AXBTASTR_ _	Bottom Trim for ACOUSTIBuilt ceiling systems – Straight
	AXBTACUR_ _	Bottom Trim for ACOUSTIBuilt ceiling systems – Curved


♦ Add the 2- or 3-digit color suffix to the item number when specifying or ordering (e.g., AX1PC2STR H Δ)

## DETAILS

CAD drawings available at [armstrongceilings.com/axiom](http://armstrongceilings.com/axiom)


### One-Piece Trim for Drywall

One-Piece Trim for Drywall: Integrated and pre-punched tapping flange for drywall attachment.

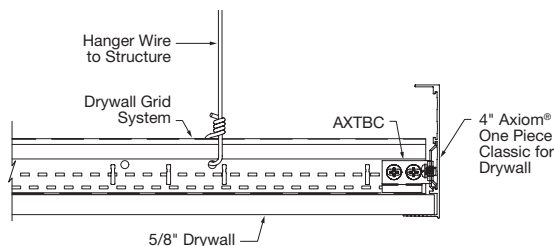

### Two-Piece Trim for Drywall

Two-Piece Trim for Drywall: Integrated and pre-punched tapping flange for drywall attachment.



## PHYSICAL DATA

**Material**  
Commercial quality extruded aluminum alloy 6063

**Surface Finish**  
Factory-applied baked polyester paint finish

**Cleaning & Disinfecting**  
Cleaning and CDC approved disinfecting options available on [armstrongceilings.com/cleaning](http://armstrongceilings.com/cleaning)

**Warranty**  
10-year limited warranty  
30-year system warranty

**Profile**  
2", 4", and 6" wide face with 3/4" horizontal flange or integral tapping flange

**Cross Tee/Main Beam Interface**  
Flush Fit

**End Detail**  
Splice with screws

**ICC Reports**  
For areas under ICC jurisdiction, see evaluation report numbers ESR-1289 and ESR-1308 for allowable values and/or conditions of use concerning the suspension system components listed on this page. The reports are subject to reexamination, revisions, and possible cancellation.

TechLine / 1 877 276-7876  
[armstrongceilings.com/axiomdrywall](http://armstrongceilings.com/axiomdrywall)  
BPCS-4659-1020

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are trademarks of the International Living Future Institute®; WELL™ and Well Building Standard are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2020 AWI Licensing LLC



TRIM & TRANSITIONS – Standard