

TECTUM® Finale™
Acoustical Ceiling Panels
coarse texture



24/7 DEFEND™
Solutions for Healthier,
Safer Spaces

CONTAIN CLEAN PROTECT



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



Also available as Wall Panels

plus capabilities
to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

▲ Tectum® Finale™ Ceiling Panels

Tectum® Finale™ high NRC ceilings provide durable, sustainable, acoustical solutions for a wide variety of applications.

KEY SELECTION ATTRIBUTES

- new** • 1" thick Tectum® Finale™ ceiling panels with 1" factory-attached furring are now available as standard items.
- Finale panels now sold by the piece – get the quantity you need without extra material
- Built-in furring pieces with factory-filled panels provide maximum sound control and install 2.5x faster than Direct-Attach for the same acoustic performance
- Excellent sound absorption – 1" panels have NRC up to 0.95 (mounting method dependent)
- Panel sizes include 24" x 48", 24" x 96", 48" x 48", and 48" x 96", with bevel on long edges, square on short sides. Custom panels are available in additional sizes and thicknesses upon request (ASQuote@armstrongceilings.com)
- new** • CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (standard colors)
- new** • Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Abuse resistant for active spaces
- Can be mechanically fastened to a wide variety of surfaces including masonry, drywall, wood, and more

COLORS Due to printing limitations, shade may vary from actual product.

Standard Colors



White (TWH)




Natural (TNA)




Custom Colors Available

DETAILS



PANEL CONSTRUCTION DETAIL

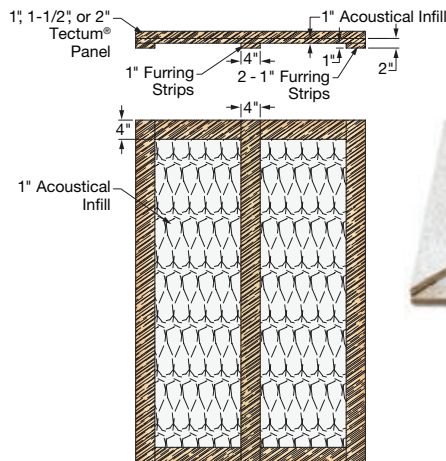

TECTUM® Finale™

Acoustical Ceiling Panels

coarse texture



LEED® WELL™ | LBC

energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/extended producer resp.	bio-based materials	FSC® (for wood)	recycled content	sourcing of raw materials	material ingredient reporting	low emitting materials	lighting quality	acoustics
-------------------	-------------------------	--------------------	------------------------	-----	------------------------------------	---------------------	-----------------	------------------	---------------------------	-------------------------------	------------------------	------------------	-----------

For LEED contribution visit armstrongceilings.com/greengenie

VISUAL SELECTION

Item No. ◆	Dimensions W x L x D (Inches)	
TECTUM® Finale™ Ceiling Panels		
8215W2L04T10_ _ _	24 x 48 x 1"	
8215W4L04T10_ _ _	48 x 48 x 1"	
8215W2L08T10_ _ _	24 x 96 x 1"	
8215W4L08T10_ _ _	48 x 96 x 1"	

FAST
4 WEEKS
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less. Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134.

◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural (unpainted), TWH = White (e.g. 8215W2L04T10 I W H) Four-sided beveled edge panels are recommended in adjoining panel installations For special sizes, and colors, call TechLine at 1 877 276-7876.

PERFORMANCE

Dots represent high level of performance.

Fire Rating	Light Reflect	Anti-Mold/Mildew	Sag Resist	Fog	Impact	Scratch	30-Yr Warranty
Class A	Up to 0.75	•	•	•	•	•	•
Class A	Up to 0.75	•	•	•	•	•	•
Class A	Up to 0.75	•	•	•	•	•	•
Class A	Up to 0.75	•	•	•	•	•	•

ACOUSTICAL INFORMATION

Total Panel Thickness	NRC	Mounting Method
1" with integral Minwool insert & 1" furring	0.85	A
	0.95	D-20


ACCESSORIES

Item No. ◆	Description	Qty/Ctn
8187L30_ _ _	#8 x 3" Painted Head Sharp Point Screw	1000
8188L30_ _ _	#8 x 3" Painted Head Drill Point Screw	1000
8189L32_ _ _	3-1/4" Painted Head CMU Screw	500


◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural, TWH = White (e.g. 8187L30 I W H)

DIRECT-ATTACH DETAIL


Mounting A




Mounting D-20



EDGE DETAIL RECOMMENDATIONS



NOTE: Use Beveled Edge/Square End for the above panel layout.

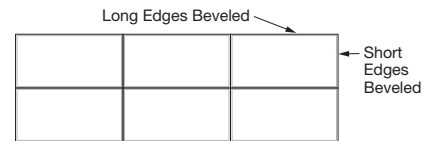

NOTE: Stacked bond patterns are possible, but not recommended. Field trimming panels may be required to achieve desired fit and alignment.

PHYSICAL DATA

Material

Cementitious Wood Fiber; FSC®-certified. For more information about FSC-certified fire-retardant products, or to view our FSC-certification letter, contact TechLine at 1 877 276-7876.

Surface Finish

Factory-applied latex paint with Silicate surface coating for abuse resistance. Natural is unpainted.

Fire Performance

Class A per IBC. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

CAN/ULC S102 surface burning characteristics.

Flame Spread Index of 25 or less and Smoke Developed Index of 50 or less.

Humidity/Sag Resistance

HumiGuard® Plus panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Mold/Mildew Protection

Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

Installation Considerations

Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum® panels. Refer to installation instructions for complete details and cutting recommendations.

Application Considerations

Color variation among panels is common due to the natural characteristics of the wood on White and Natural panels.

Wood fibers may appear orange on Natural colored panels due to the characteristics of the wood.

1" Tectum Finale furring will be visible from the side. Furring can be field painted to match panel finish.

Design Support

Project management assistance is available by calling TechLine at 1 877 276-7876 or emailing ASQuote@armstrongceilings.com

Specification Consideration

FSC-certified panels available upon request. Attention: For FSC-certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint

Tectum® Finale™ ceiling panels are approved for application in all seismic areas when installed per Armstrong Ceilings Installation Instructions.

Cleaning and Disinfecting

Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

Warranty

30-Year Performance Guarantee and Warranty when installed with Armstrong® Suspension System. Details at armstrongceilings.com

FAST134 Program Considerations

Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times. Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the Country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Weight

1" – 3lbs/SF