



WOODWORKS® Channeled Vector® *Custom Looks with Standard Products*

CAD/Revit® drawings at: armstrongceilings.com/cadrevit

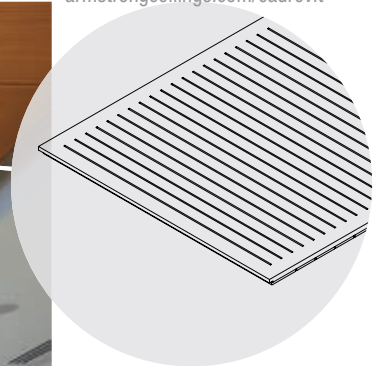

plus capabilities to do more



▲ WoodWorks® Channeled – Vector® panels in Natural Variations™ Light Cherry

armstrongceilings.com/capabilities
See more photos at: armstrongceilings.com/photogallery

These FSC® certified ceiling panels are available in rich, real wood veneers or economical Wood Looks visuals.

KEY SELECTION ATTRIBUTES

- Real wood veneers or Images™ high-quality printed visuals
- Create a continuous ceiling, cloud, or ceiling-to-wall transition
- Acoustical backing improves sound quality
- Shorter lead times and lower costs than custom millwork
- Class A fire performance

Natural Variations™ Finishes


- FSC Chain of Custody (CoC) certified WoodWorks® products represent responsible production and consumption practices from the forest to the consumer
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits

Images™ Finishes

- Larger Vector panel sizes – 24" x 48", 12" x 48", and 30" x 30" for even more design flexibility
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits


VENEERS Due to printing limitations, shade may vary from actual product.

Natural Variations™ (Real Wood Veneers)

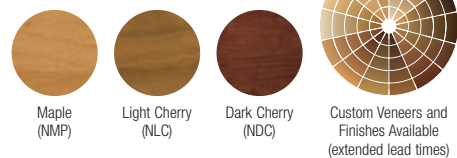


Custom Veneers and Finishes Available (extended lead times)


VENEER PERFORATION OPTIONS (Actual 1:2 scale shown)

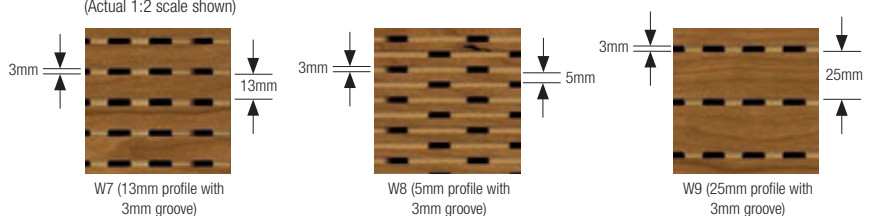

IMAGES™ FINISHES (High Quality Printed Finishes)



IMAGES PERFORATION OPTIONS (Actual 1:2 scale shown)

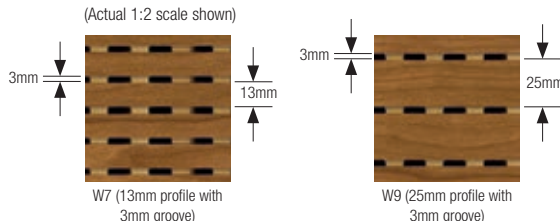

WOODWORKS® Channeled Vector®



LEED® WELL™ LBC

UP TO 75% RECYCLED CONTENT

Calculate sustainability with GreenGenie™ armstrongceilings.com/greengenie

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- FSC® (for wood)
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

WITH INFILL PANEL

VISUAL SELECTION

Edge Profile	Item No. ◆	Dimensions Nominal W x L x H (Inches) Custom Sizes Available	Perforations
FSC® certified WOODWORKS® Channeled Vector® Panels with Perforated Veneers (with acoustical fleece) 15/16" Vector	5903	24 x 24 x 3/4"	W7, W8, W9
FSC® certified WOODWORKS® Channeled Vector® Panels with Perforated Images™ Finishes (with acoustical fleece) 15/16" Vector	6682	24 x 24 x 11/16"	W7, W9
	6680	12 x 48 x 11/16"	W7, W9
	6684	24 x 48 x 11/16"	W7, W9
	6686	30 x 30 x 11/16"	W7, W9

◆ When specifying or ordering, include the appropriate 2-letter perforation suffix and the color suffix (e.g., 6683W Z P M E.)

PERFORMANCE


Fire Rating
Class A
Class A
Class A
Class A
Class A

ACOUSTICAL INFORMATION


Performance determined by perforation size. Dots represent high level of performance.

Perforation	NRC panels
W7 13mm Profile Groove	0.75 • 0.80† •
W8 5mm Profile Groove	0.80 • 0.90† •
W9 25mm Profile Groove	0.50 0.60†

† NRC when installed with acoustical infill (item 8200T10 or 5479)



SUSPENSION SYSTEMS (Heavy-duty)



Prelude suspension system is available in many standard colors. All other suspension systems are available in standard White only. Other colors available as special order.

ACCESSORIES

Natural Variations™ and Images™ finishes are designed to coordinate with each other. Trim and infill panels are available. For more information go to: armstrongceilings.com/woodworksaccessories

PHYSICAL DATA

Material
FSC® certified fire-retardant medium-density fiberboard with face-cut veneers (RA-COC-003601). For more information about FSC® certified products, or to view our FSC® certification letter, visit armstrongceilings.com/woodworksfscc

Surface Finish
Clear or tinted semi-gloss coating

Fire Performance
Class A: ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

Class A: CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

ASTM E1264 Classification
Type XX - Fire Class A

Application Considerations
Variation among panels may occur due to the natural characteristics of the wood and grain.

It is very important that WoodWorks® panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained throughout the life of the product.

Specification Consideration
Attention: For FSC® certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint

WoodWorks Channeled wood panels have been engineered, tested, and approved in all seismic areas when installed per Armstrong Ceilings installation instructions.

Warranty
Details at armstrongceilings.com/warranty

Panel Weight
2.2 lbs/SF (Bulk packaged)