

# DUNE™ Second Look®

Scored Tegular  
fine texture



**GREENGUARD**  
Gold Certified  
(details below)

LEED® WELL™ | LBC


UP TO **41%** RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extend producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with GreenGenie™  
armstrongceilings.com/greengenie

LOCATION DEPENDENT

\$\$\$\$

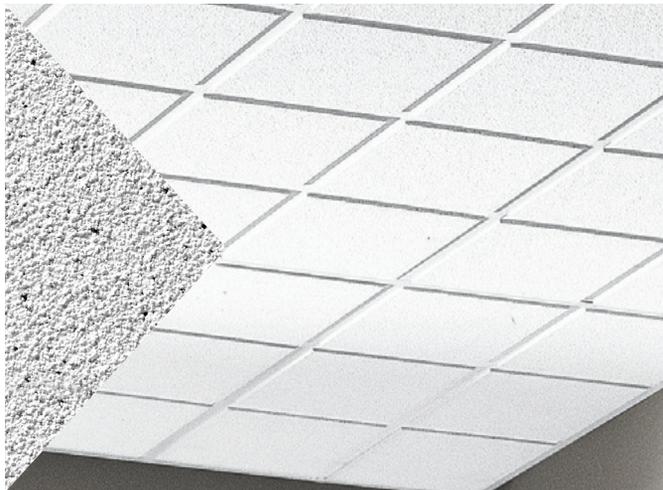

▲ Dune™ Second Look® I panels with Prelude® XL 15/16" suspension system

Fine textured panels with geometric scored visuals;  
Non-directional and durable with standard acoustical performance.

## KEY SELECTION ATTRIBUTES

- Upgrade look at a modest price
- Dune™ Second Look® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Content – 99%
- Durable – Scratch-resistant
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- 10-Year replacement panel available for item 2711, 2712, 2722



## COLOR



White (WH)

## FACE VIEW



Second Look I panel – Scoring creates nominal 12" x 12" squares



Second Look II panel – Scoring creates nominal 24" x 24" squares

## VISUAL SELECTION

armstrongceilings.com/catdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
DUNE™ Second Look® I 15/16" Angled Tegular	11	2711	24 x 48 x 3/4"
DUNE™ Second Look® II 15/16" Angled Tegular	11	2712	24 x 48 x 3/4"
9/16" Angled Tegular	27	2722	24 x 48 x 3/4"

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

## PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	DURABILITY	Recycled Content	Recycle Program	Warranty
NRC + CAC =										
0.50 35	N/A	Class A	0.81	•	•	•	•	Std	•	•
0.50 35	N/A	Class A	0.81	•	•	•	•	Std	•	•
0.50 35	N/A	Class A	0.81	•	•	•	•	Std	•	•

## SUSPENSION SYSTEMS

NOTE: It is not recommended to install Silhouette® or Interlude® grid with Second Look® panels.



## PHYSICAL DATA

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

**ASTM E1264 Classification**  
Type III, Form 2, Pattern C E K  
Fire Class A

**Humidity/Sag Resistance**  
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

**Anti-Mold/Mildew**  
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

**VOC Emissions**  
GREENGUARD Gold Certified  
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**Insulation Value**  
R Factor – 1.6 (BTU units); R Factor – 0.28 (Watts units)



**Design Consideration**  
Do not mix Dune™ Second Look® with standard Dune panels in the same room. It is not recommended to install Silhouette® or Interlude® grid with Second Look® panels.

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

**Weight; Square Feet/Carton**  
1.00 lbs/SF; 80 SF/ctn

**Minimum Order Quantity**  
1 carton

**Metric Items Available**  
2711M, 2722M, 2712M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.